

# Presario 3000

System Board	Assembly	Spare Part	System
System Board	005492-001	240906-001	All

## Configuration Jumper Settings (005492)

Jumper	Pins	Function
P7		Replacement Battery Connector
P8 <u>Processor</u>		<u>Clock Speed Select</u>
75MHz	1 - 2	50MHz
90MHz, 120MHz, 150MHz	2 - 3	60MHz
100MHz, 133MHz, 166MHz, 200MHz	3 - 4	66MHz
P9 <u>Processor</u>		<u>CPU Clock Multiplier</u>
75MHz, 90MHz, 100MHz	A1-A2 B1-B2	1.5x
120MHz, 133MHz	A2-A3 B1-B2	2.0X
150MHz, 166MHz	A2-A3 B2-B3	2.5X
200MHz	A1-A2 B2-B3	3.0X
P11		CMOS Erase/Password Clear

Configuration Code	Assembly	System Board Spare Part	Model
GZC5	005492-001	240906-001	3060
GZF2	005492-001	240906-001	3020
GZF3	005492-001	240906-001	3020
GZF4	005492-001	240906-001	3020
GZF5	005492-001	240906-001	3020
GZF6	005492-001	240906-001	3020
GZF9	005492-001	240906-001	3020

Microprocessor	Assembly	Spare Part	System
P54C/166, 66MHz	251591-003	243134-001	All
P55C/166MMX, 66MHz	240167-001	240181-001	3060 (JPN)
P55C/200, 66MHz	240167-002	240181-002	3060
P54C Heat Sink	172944-001	214097-001	3020
P55C Heat Sink	240167-001	238247-001	3060

Memory	Assembly	Spare Part	System
4 MB SIMM, EDO, 60ns, Tin/Lead Contacts <sup>1</sup>	185173-002	236512-001	All
8 MB SIMM, EDO, 60ns, Tin/Lead Contacts	185172-002	236513-001	All
1 MB Video Memory	004827-001	213859-001	All
Cache, 256K, 16OP	237716-001	243117-001	All

<sup>1</sup> Two each shipped in each model.

# Presario 3000

<b>Miscellaneous</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>System</b>
Keyboard, NA English	237743-401	240992-401	All
Speaker Kit	239511-001	240989-001	All
Riser Board	005556-001	240908-001	All
Mouse Remote	241015-001	241028-001	All
Mouse Remote Receiver	241016-001	241029-001	All
Display Panel	240925-001	241195-001	All
Display Enclosure *		241196-001	All
Display Bezel, Front	240929-001	241197-001	All
Microphone w/ Cable	241525-004	241068-001	All

\* Complete assembly (except display).

<b>Controller Boards</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>System</b>
Graphics		240907-001	All
Wavetable	004824-001	213858-001	All

<b>Hard Drives</b>	<b>Spare Part</b>	<b>System</b>
3.8 GB, IDE	238475-001	3060
2.0 GB, IDE	241174-001	3020

<b>CD-ROM Drive</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>System</b>
CD-ROM, IDE, 6-spd, Multiplatter, Ivory	185679-406	185680-406	All

<b>Diskette Drives</b>	<b>Spare Part</b>	<b>System</b>
1.44 MB, 3.5," Gray	160788-301	All

<b>33.6k-bps Modem (+FDSP+TAM ISA)</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>Cable Spare Part</b>	<b>System</b>
APD	221500-001	221506-371	137256-001	All
Australia	005671-103	225259-011	165224-012	All
France	005671-102	225259-051	165224-051	All
Germany	005671-103	225259-041	165224-041	All
Italy	005671-102	225259-061	165224-061	All
JPN/LTNA	221500-001	221506-191	137256-001	All
NA	221500-001	221506-001	165224-001	All
Netherlands	005671-104	225259-331	165224-331	All
Sweden	005671-103	225259-101	165224-101	All
Switzerland	005671-103	225259-111	165224-111	All
U Kingdom	005671-101	225259-031	165221-032	All

<b>Cables</b>	<b>Spare Part</b>	<b>System</b>
Diskette Drive Cable, 15"	241097-001	All
Cable Kit: CD-Audio, CD, HD, Diskette, Serial Port, Mic Intermediate, RF Module, RF Antenna, Button Board	241095-001	All
Hard Drive Cable, 10"	241096-001	All
Audio Cable	241176-001	All
Mic Intermediate	241094-001	All
Serial Port	171141-002	All
CD-ROM Drive	241177-001	All
RF Module Cable	241180-001	All
RF Antenna Cable	241179-001	All
Button Board Cable	241178-001	All


# Presario 3000

<b>ROM Information</b>	<b>Spare Part</b>	<b>System</b>
System ROMPaq	148218-001	All


<b>Power Supply/Battery</b>	<b>Spare Part</b>	<b>System</b>
Power Supply, 230 VAC PCF	241071-001	All
Real-Time Clock Battery (4.5 v alkaline)	160274-001	All

# Presario 3000

## MEMORY UPGRADE CHART I/O BOARD 005492 (8 MB)

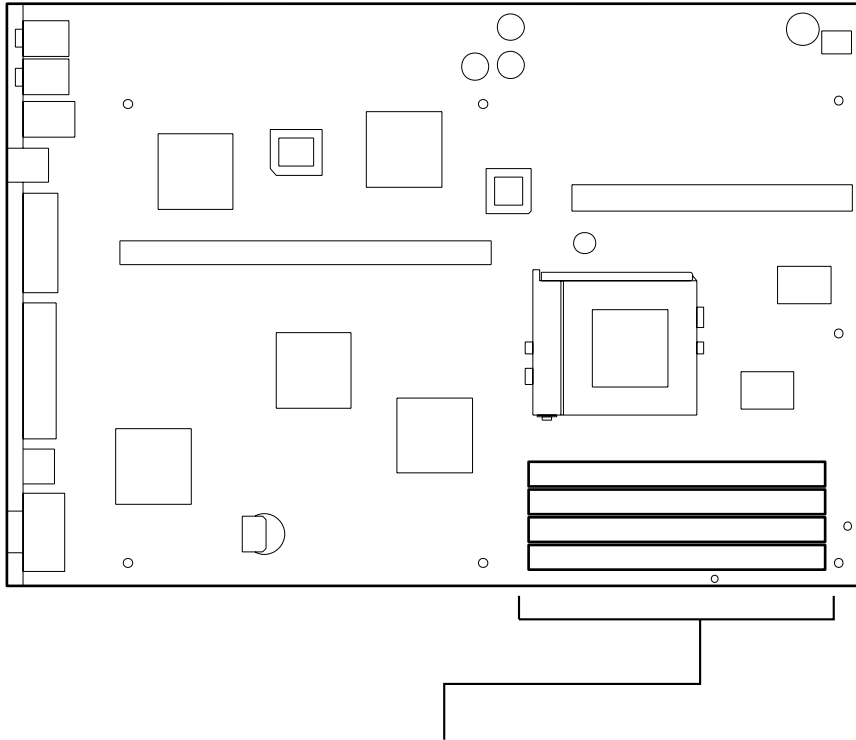

MAXIMUM SYSTEM MEMORY IS 128 MB



8-MB EDO 60ns - OPTION PN 236548-001

Memory upgrade SIMMs must be installed in pairs.  
Use SIMMs with tin/lead contacts only. EDO Simms  
are recommended for all system boards.