



HP Stream Laptop PC 14
** Model numbers: 14-ax0XX*

Maintenance and Service Guide
IMPORTANT! This document is intended for
HP authorized service providers only.

© Copyright 2016 HP Development Company, L.P.

Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. Intel and Celeron are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of the Microsoft group of companies. SD Logo is a trademark of its proprietor.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

First Edition: August 2016

Document Part Number: 902530-001

Product notice

This guide describes features that are common to most models. Some features may not be available on your computer.

Not all features are available in all editions of Windows. This computer may require upgraded and/or separately purchased hardware, drivers, and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com> for details.

Software terms

By installing, copying, downloading, or otherwise using any software product preinstalled on this computer, you agree to be bound by the terms of the HP End User License Agreement (EULA). If you do not accept these license terms, your sole remedy is to return the entire unused product (hardware and software) within 14 days for a refund subject to the refund policy of your place of purchase.

For any further information or to request a full refund of the computer, please contact your local point of sale (the seller).

Safety warning notice

 **WARNING!** To reduce the possibility of heat-related injuries or of overheating the device, do not place the device directly on your lap or obstruct the device air vents. Use the device only on a hard, flat surface. Do not allow another hard surface, such as an adjoining optional printer, or a soft surface, such as pillows or rugs or clothing, to block airflow. Also, do not allow the AC adapter to contact the skin or a soft surface, such as pillows or rugs or clothing, during operation. The device and the AC adapter comply with the user-accessible surface temperature limits defined by the International Standard for Safety of Information Technology Equipment (IEC 60950-1).

Table of contents

1 Product description	1
2 External component identification	3
Display	3
Left side	4
Right side	5
Front	5
Top	6
TouchPad	6
Lights	7
Button	8
Keys	9
Using the action keys	10
Labels	11
3 Illustrated parts catalog	13
Computer major components	13
Rubber Kit	15
Display assembly components	16
Miscellaneous parts	17
4 Removal and replacement procedures preliminary requirements	18
Tools required	18
Service considerations	18
Plastic parts	18
Cables and connectors	18
Grounding guidelines	19
Electrostatic discharge damage	19
Packaging and transporting guidelines	20
Workstation guidelines	20
5 Removal and replacement procedures for Authorized Service Provider parts	22
Component replacement procedures	22
Bottom cover	23
Battery	24
Memory module	25

WLAN module	26
RTC battery	28
Heat sink	29
Speakers	31
System board	32
TouchPad	34
Display assembly	35
Power button board	41
Power connector cable	42
Keyboard/top cover	43

6 Using Setup Utility (BIOS) 44

Starting Setup Utility (BIOS)	44
Updating Setup Utility (BIOS)	44
Determining the BIOS version	44
Downloading a BIOS update	45

7 Specifications 46

Computer specifications	46
35.56-cm (14.0-in), HD display specifications	47

8 Backing up, restoring, and recovering 48

Creating recovery media and backups	48
Creating HP Recovery media (select products only)	48
Using Windows tools	49
Restore and recovery	50
Recovering using HP Recovery Manager	50
What you need to know before you get started	50
Using the HP Recovery partition (select products only)	51
Using HP Recovery media to recover	51
Changing the computer boot order	52
Removing the HP Recovery partition (select products only)	53

9 Using HP PC Hardware Diagnostics (UEFI) 54

Downloading HP PC Hardware Diagnostics (UEFI) to a USB device	54
---	----

10 Power cord set requirements 56

Requirements for all countries	56
Requirements for specific countries and regions	56

11 Recycling	58
Index	59


1 Product description

Category	Description
Product Name	HP Stream Laptop PC Model numbers: 14-ax0XX
Processor	Intel Celeron® N3060 (1.6 GHz, turbo up to 2.48 GHz), 1600 MHz/2 MB L2 cache), dual core, 4 W Intel Celeron N3050 (1.6 GHz, turbo up to 2.16 GHz), 1600 MHz/2 MB L2 cache), dual core, 4 W
Chipset	Integrated SoC
Graphics	Internal graphics Intel HD Graphics 400 (N3060 processor) Intel HD Graphics (N3050 processor) Support for DX12, HD decode, and HDMI
Panel	16:9 ultra-wide aspect ratio 14.0-in (1366×768), BrightView, high-definition (HD), light-emitting diode (LED), slim 3.0 mm, eDP, 220 nits
Memory	On-board system memory <ul style="list-style-type: none">• DDR3L-1600MHz single channel support• Supports up to 2 GB maximum on-board system memory One SODIMM slot-non-accessible/non-upgradeable <ul style="list-style-type: none">• DDR3L-1600MHz single channel support• Supports up to 4 GB maximum system memory
Hard drive	eMMC configuration 32 MB
Optical drive	External, 9.5-mm tray load, SATA, USB, DVD±RW DL SuperMulti Drive
Camera and microphone	HP Webcam: VGA camera -indicator light, USB 2.0, 640×480 by 24 frames per second Single digital microphone HP Noise Cancellation enabled
Audio	DTS Studio Sound Dual speakers
Wireless	Integrated Wireless options with dual antennas (M.2/PCIe) Intel Dual Band Wireless-AC 7265 802.11 AC 2x2 WiFi + BT 4.2 Combo Adapter (non-vPro) Compatible with Miracast-certified devices
External card expansion	HP Multi-Format Digital Media Card Reader Support for SD/SDHC/SDXC Push-pull insertion/removal

Category	Description
Internal card expansion	One M.2 card slot for WLAN
Ports	<p>AC Smart Pin adapter plug</p> <p>Combo audio-out (headphone)/audio-in (microphone) jack</p> <p>High-definition multimedia interface (HDMI) v.1.4, supporting 1920×1080 at 60 Hz</p> <p>USB 3.0 (2)</p> <p>USB 2.0 (1)</p>
Keyboard/pointing devices	<p>Keyboard</p> <p>Full-size, textured island keyboard (no numeric keypad)</p> <p>TouchPad requirements</p> <p>TouchPad with image sensor</p> <p>Taps enabled as default</p> <p>Multitouch gestures enabled</p> <p>Default on for 2-finger scroll, pinch, rotate, 2-finger click, 3-finger flick</p>
Power requirements	<p>Battery</p> <p>3-cell, 41-WHr, Li-ion battery</p> <p>AC adapter</p> <p>45-W</p>
Security	<p>Kensington Security Lock</p> <p>Support for Trust Platfom Module (TPM) 2.0</p>
Operating system	<p>Preinstalled</p> <p>Windows 10</p> <p>For Developed Market (ML)</p> <p>Microsoft Windows 10 Home Entry Notebook with OneDrive</p> <p>Microsoft Windows 10 Home Entry Notebook</p> <p>For Emerging Market (EM/SL)</p> <p>Microsoft Windows 10 Home Entry Notebook with OneDrive</p> <p>Microsoft Windows 10 Home Entry Notebook</p>
Serviceability	<p>End user replaceable part</p> <p>AC adapter</p>

2 External component identification

Display

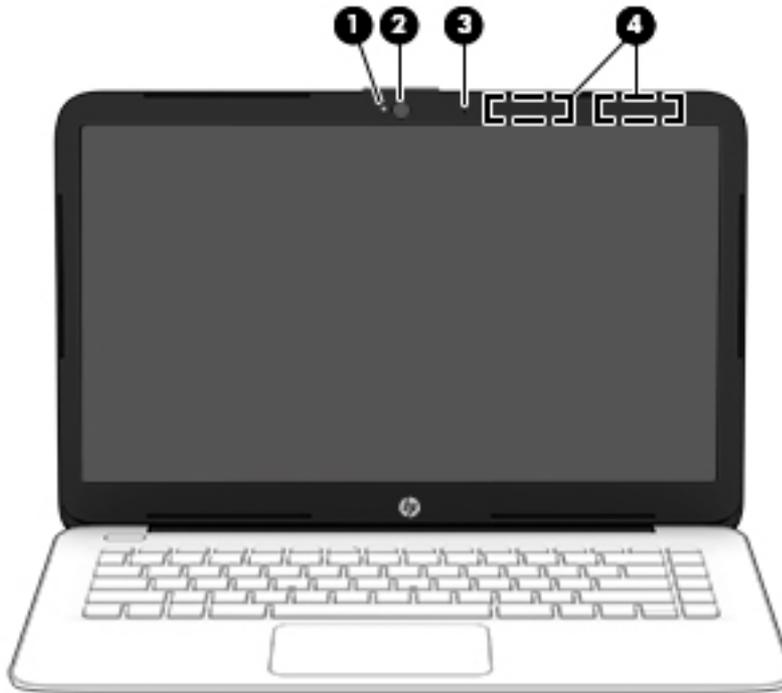

Component	Description
(1) Camera light	On: The camera is in use.
(2) Camera	Allows you to video chat, record video, and record still images.
(3) Internal microphone	Records sound.
(4) WLAN antennas* (1 or 2 depending on model)	Send and receive wireless signals to communicate with wireless local area networks (WLANs).


*The antennas are not visible from the outside of the computer, and antenna location varies. For optimal transmission, keep the areas immediately around the antennas free from obstructions.

For wireless regulatory notices, see the section of the *Regulatory, Safety, and Environmental Notices* that applies to your country or region.

To access this guide:

- ▲ Select the **Start** button, select **All apps** (required on some products), select **HP Help and Support**, and then select **HP Documentation**.


Left side

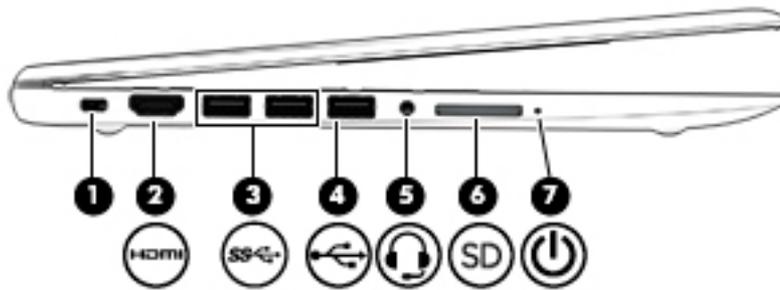

Component	Description
(1) 	<p>Security cable slot</p> <p>Attaches an optional security cable to the computer.</p> <p>NOTE: The security cable is designed to act as a deterrent, but it may not prevent the computer from being mishandled or stolen.</p>
(2) 	<p>HDMI port</p> <p>Connects an optional video or audio device, such as a high-definition television, any compatible digital or audio component, or a high-speed High-Definition Multimedia Interface (HDMI) device.</p>
(3) 	<p>USB 3.0 ports (2)</p> <p>Connect an optional USB device, such as a keyboard, mouse, external drive, printer, scanner or USB hub.</p>
(4) 	<p>USB 2.0 port</p> <p>Connects an optional USB device, such as a keyboard, mouse, external drive, printer, scanner or USB hub.</p>
(5) 	<p>Audio-out (headphone)/Audio-in (microphone) combo jack</p> <p>Connects optional powered stereo speakers, headphones, earbuds, a headset, or a television audio cable. Also connects an optional headset microphone. This jack does not support optional standalone microphones.</p> <p>WARNING! To reduce the risk of personal injury, adjust the volume before putting on headphones, earbuds, or a headset. For additional safety information, refer to the <i>Regulatory, Safety, and Environmental Notices</i>.</p> <p>To access this guide:</p> <ul style="list-style-type: none"> ▲ Select the Start button, select All apps (required on some products), select HP Help and Support, and then select HP Documentation. <p>NOTE: When a device is connected to the jack, the computer speakers are disabled.</p>
(6) 	<p>Memory card reader</p> <p>Reads optional memory cards that enable you to store, manage, share, or access information.</p> <p>To insert a card:</p> <ol style="list-style-type: none"> 1. Hold the card label-side up, with connectors facing the computer. 2. Insert the card into the memory card reader, and then press in on the card until it is firmly seated. <p>To remove a card:</p>

Component	Description
(7)  Power light	<ul style="list-style-type: none"> ▲ Pull the card out of the memory card reader. • On: The computer is on. • Blinking: The computer is in the Sleep state, a power-saving state. The computer shuts off power to the display and other unneeded components. • Off: The computer is off or in Hibernation. Hibernation is a power-saving state that uses the least amount of power.

Right side

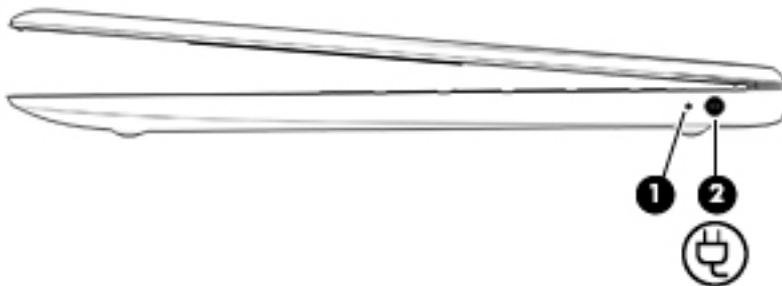

Component	Description
(1) AC adapter and battery light	<ul style="list-style-type: none"> • White: The AC adapter is connected and the battery is fully charged. • Blinking white: The AC adapter is disconnected and the battery has reached a low battery level. • Amber: The AC adapter is connected and the battery is charging. • Off: The battery is not charging.
(2)  Power connector	Connects an AC adapter.


Front



Component	Description
Speakers (2)	Produce sound.


Top

TouchPad

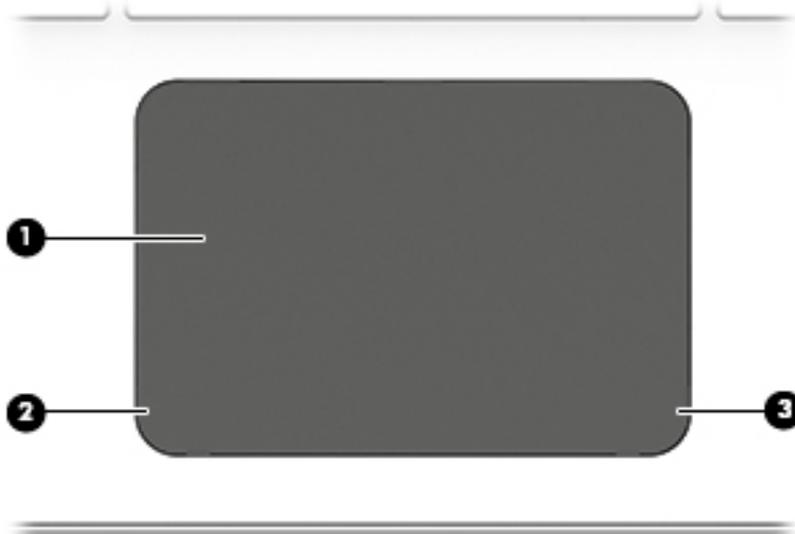


Component		Description
(1)	TouchPad zone	Reads your finger gestures to move the pointer or activate items on the screen.
(2)	Left TouchPad button	Functions like the left button on an external mouse.
(3)	Right TouchPad button	Functions like the right button on an external mouse.

Lights

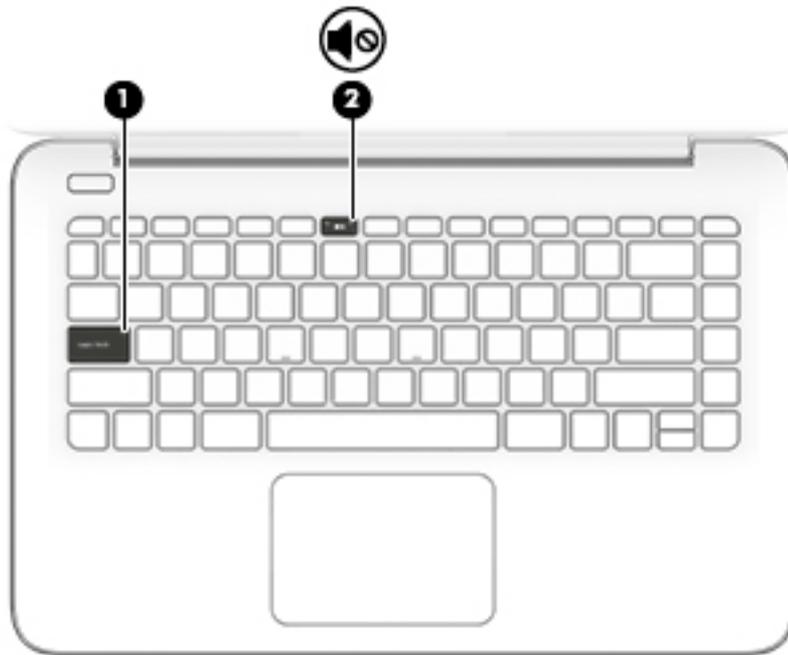


Component	Description
(1) Caps lock light	On: Caps lock is on, which switches the key input to all capital letters.
(2)  Mute light	<ul style="list-style-type: none">• Amber: Computer sound is off.• Off: Computer sound is on.

Button

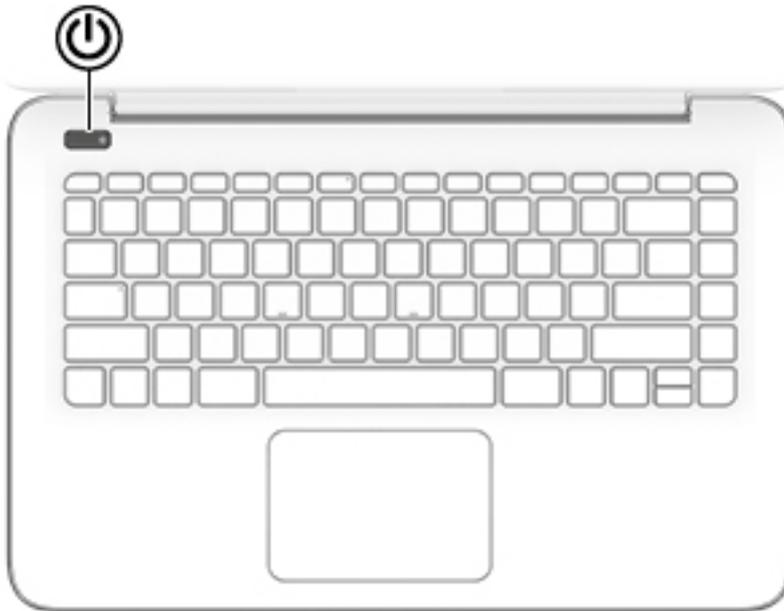

Component	Description
 Power button	<ul style="list-style-type: none">• When the computer is off, press the button to turn on the computer.• When the computer is on, press the button briefly to initiate Sleep.• When the computer is in the Sleep state, press the button briefly to exit Sleep.• When the computer is in Hibernation, press the button briefly to exit Hibernation. <p>CAUTION: Pressing and holding down the power button results in the loss of unsaved information.</p> <p>If the computer has stopped responding and shutdown procedures are ineffective, press and hold the power button down for at least 5 seconds to turn off the computer.</p> <p>To learn more about your power settings, see your power options.</p> <ul style="list-style-type: none">▲ Type <code>power</code> in the taskbar search box, and then select Power & sleep settings. <p>– or –</p> <p>Right-click the Start button, and then select Power Options.</p>

Keys

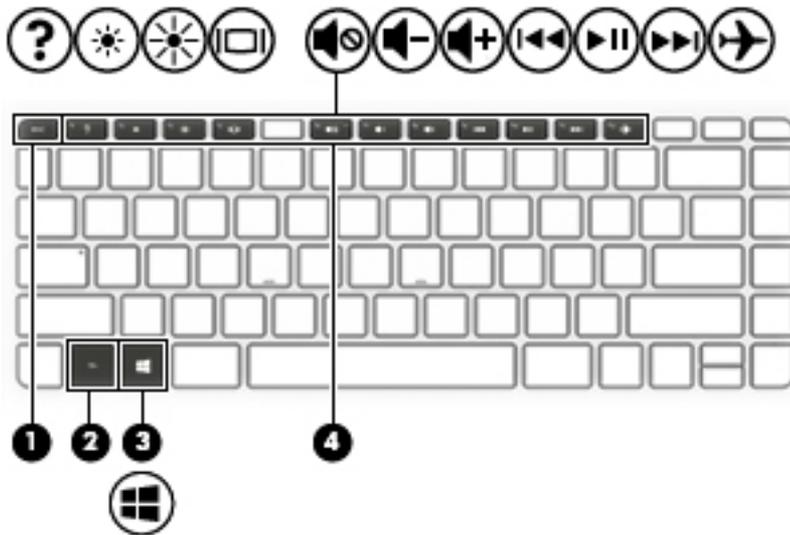

Component	Description
(1) esc key	Displays system information when pressed in combination with the fn key.
(2) fn key	Executes specific functions when pressed in combination with the esc key.
(3)  Windows key	Opens the Start menu. NOTE: Pressing the Windows key again will close the Start menu.
(4) Action keys	Execute frequently used system functions.

Using the action keys

- An action key performs an assigned function.
- The icon on each action key illustrates the function for that key.

Icon	Description
	Opens the Get started app.
	Decreases the screen brightness incrementally as long as you hold down the key.
	Increases the screen brightness incrementally as long as you hold down the key.
	Switches the screen image between display devices connected to the system. For example, if a monitor is connected to the computer, repeatedly pressing this key alternates the screen image from the computer display to the monitor display to a simultaneous display on both the computer and the monitor.
	Mutes or restores speaker sound.
	Decreases speaker volume incrementally while you hold down the key.
	Increases speaker volume incrementally while you hold down the key.
	Plays the previous track of an audio CD or the previous section of a DVD or a Blu-ray Disc (BD).
	Starts, pauses, or resumes playback of an audio CD, a DVD, or a BD.
	Plays the next track of an audio CD or the next section of a DVD or a BD.
	Turns the airplane mode and wireless feature on or off. NOTE: The airplane mode key is also referred to as the wireless button. NOTE: A wireless network must be set up before a wireless connection is possible.


Labels

The labels affixed to the computer provide information you may need when you troubleshoot system problems or travel internationally with the computer.

 **IMPORTANT:** Check the following locations for the labels described in this section: the bottom of the computer, inside the battery bay, under the service door, or on the back of the display.

- Service label—Provides important information to identify your computer. When contacting support, you will probably be asked for the serial number, and possibly for the product number or the model number. Locate these numbers before you contact support.

Your service label will resemble one of the examples shown below. Refer to the illustration that most closely matches the service label on your computer.

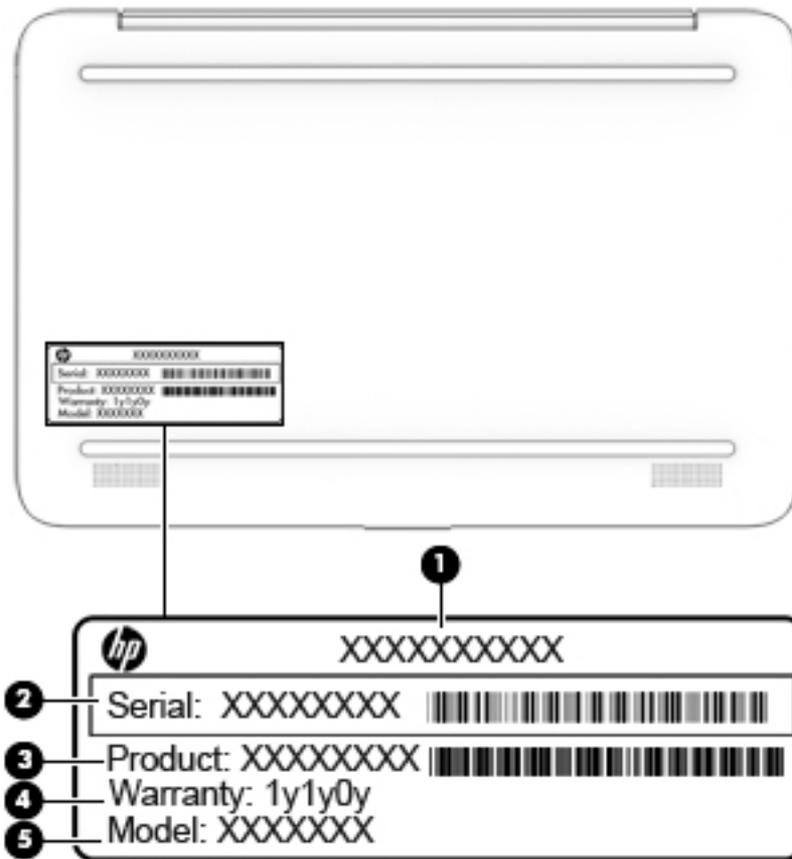

Item	Description	Function
(1)	Product name	This is the product name affixed to the front of the computer.
(2)	Serial number	This is an alphanumeric identifier that is unique to each product.
(3)	Product number	This number provides specific information about the product's hardware components. The part number helps a service technician to determine what components and parts are needed.


Item	Description	Function
(4)	Warranty period	This number describes the duration of the warranty period for the computer.
(5)	Model description	This is the alphanumeric identifier used to locate documents, drivers, and support for the computer.

- Regulatory label(s)—Provide(s) regulatory information about the computer.
- Wireless certification label(s)—Provide(s) information about optional wireless devices and the approval markings for the countries or regions in which the devices have been approved for use.

3 Illustrated parts catalog

 **NOTE:** HP continually improves and changes product parts. For complete and current information on supported parts for your computer, go to <http://partsurfer.hp.com>, select your country or region, and then follow the on-screen instructions.


Computer major components

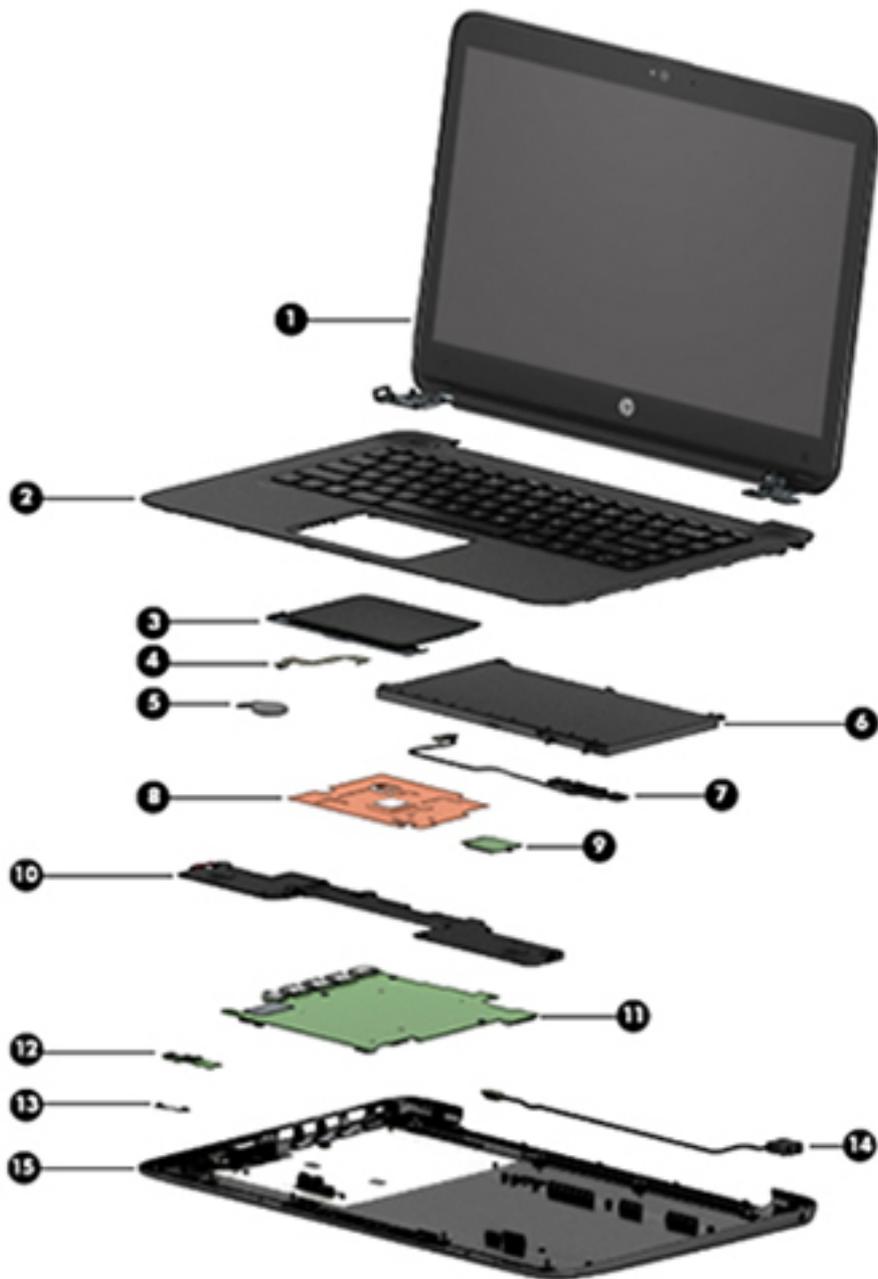

Item	Component	Spare part number
(1)	Display assembly: The display assembly is spared at the subcomponent level only. For more display assembly spare part information, see Display assembly components on page 16 .	
(2)	Keyboard/top cover (includes keyboard cable): For a list of keyboard country codes, see Keyboard/top cover on page 43 or Keyboard/top cover on page 43 .	
	For use in blue models	905569-xx1
	For use in purple models	905570-xx1
	For use in white models	910180-xx1
(3)	TouchPad	
	For use in blue models	905691-001
	For use in purple models	906174-001
	For use in white models	910178-001
(4)	TouchPad cable	905563-001
(5)	RTC battery	857380-001
(6)	Battery , 3-cell, 41-WHr, 3.615-AHr, Li-ion	844203-855
(7)	Battery cable	905566-001
(8)	Heat sink	907105-001
(9)	WLAN module (Intel Dual Band Wireless-AC 7265 802.11 AC 2x2 WiFi + BT 4.2 Combo Adapter (non-vPro))	793840-005
(10)	Speakers (includes cable)	905565-001
(11)	System board (includes a graphics subsystem with UMA memory, thermal grease, and thermal pads):	
	Intel Celeron N3060 processor, 2 GB system memory, 32 GB eMMC hard drive, and a non-Windows operating system	905302-001
	Intel Celeron N3060 processor, 2 GB system memory, 32 GB eMMC hard drive, and the Windows 10 operating system	905302-601
	Intel Celeron N3060 processor, 32 GB eMMC hard drive, and a non-Windows operating system	905305-001
	Intel Celeron N3060 processor, 32 GB eMMC hard drive, and the Windows 10 operating system	905305-601
	Intel Celeron N3050 processor, 2 GB system memory, 32 GB eMMC hard drive, and a non-Windows operating system	905304-001
	Intel Celeron N3050 processor, 2 GB system memory, 32 GB eMMC hard drive, and the Windows 10 operating system	905304-601
	Intel Celeron N3050 processor, 32 GB eMMC hard drive, and a non-Windows operating system	905306-001
	Intel Celeron N3050 processor, 32 GB eMMC hard drive, and the Windows 10 operating system	905306-601
(12)	Power button board	905579-001
(13)	Power button board cable	905562-001
(14)	Power connector (DC in) cable	810327-004
(15)	Base enclosure	
	For use in blue models	905564-001


Item	Component	Spare part number
	For use in purple models	905690-001
	For use in white models	910176-001
	Memory module, 4 GB (PC3L, 12800, 1600-MHz; not illustrated)	691740-005

Rubber Kit

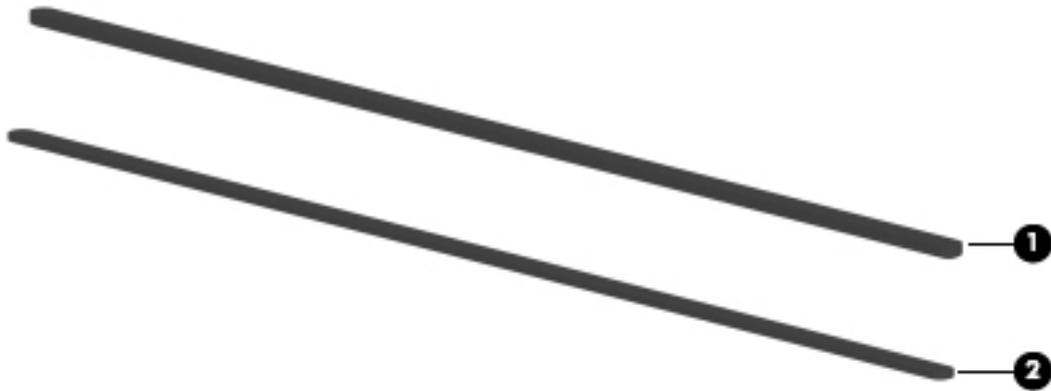

Item	Description	Spare part number
	Rubber Kit for use in blue models	905567-001
	Rubber Kit for use in purple models	905739-001
	Rubber Kit for use in white models	910179-001
(1)	Top rubber foot/strip	
(2)	Bottom rubber foot/strip	

Display assembly components

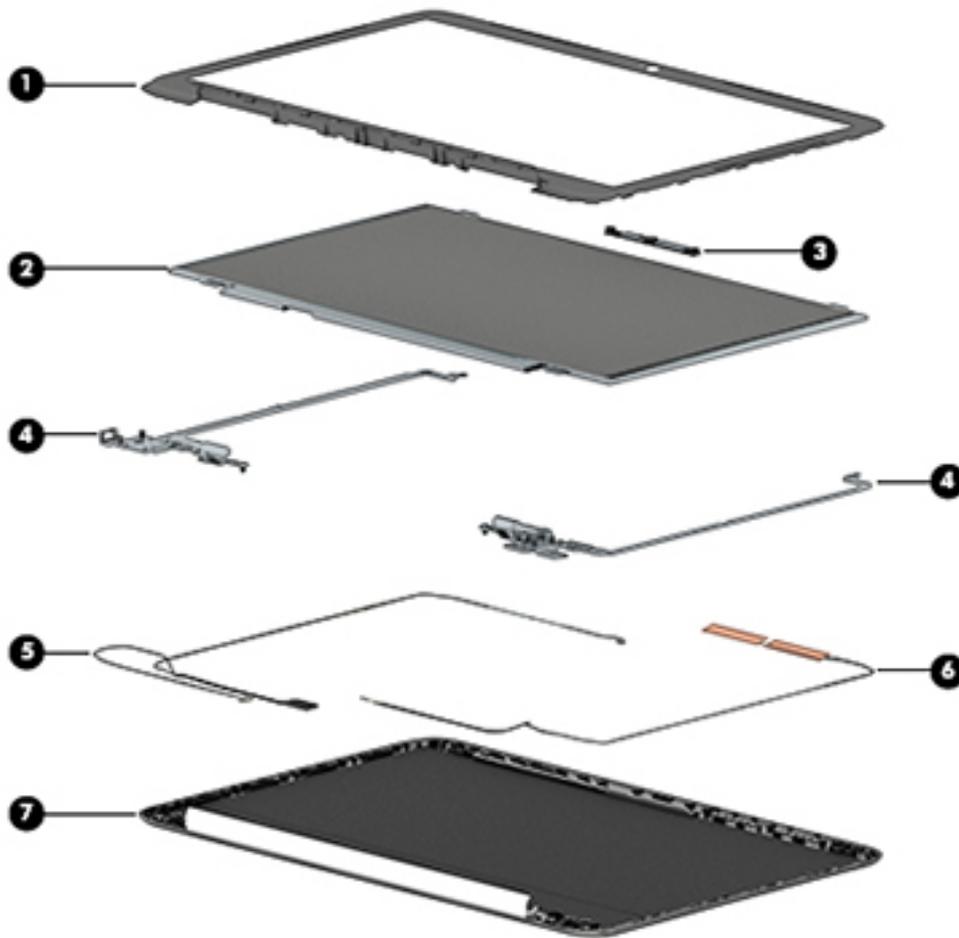

Item	Description	Spare part number
(1)	Display bezel	
	For use in blue models	905559-001
	For use in purple models	905689-001
	For use in white models	910177-001
(2)	Raw display panel	847664-005
(3)	Webcam/microphone module	766523-025
(4)	Display Hinge Kit (includes left and right display hinges)	905560-001
(5)	Display panel cable	905561-001
(6)	Antenna Kit (includes wireless antenna cable with transceiver)	906173-001
(7)	Display back cover	
	For use in blue models	905558-001
	For use in purple models	905688-001
	For use in white models	910175-001

Miscellaneous parts

Component	Spare part number
HP Smart AC adapter , 45-W, non-PFC, RC, 4.5-mm	741553-850
HP HDMI-to-VGA adapter	701943-001
HP USB to Gigabit RJ-45 Adapter	829941-001
HP USB external DVD±RW DL SuperMulti Drive	747080-001
Power cord (3-pin, black, 1.00-m):	
Argentina	401300-007
Denmark	213353-008
Europe	213350-009
Israel	398063-003
Italy	213352-008
North America	213349-009
South Africa	361240-002
Switzerland	213354-008
The United Kingdom and Singapore	213351-008
Rubber Kit (includes top and bottom rubber feet/strips)	
For use in blue models	905567-001
For use in purple models	905739-001
For use in white models	910179-001
Screw Kit	905568-001

4 Removal and replacement procedures preliminary requirements

Tools required

You will need the following tools to complete the removal and replacement procedures:

- Flat-bladed screw driver
- Magnetic screw driver
- Phillips P0 screw driver

Service considerations

The following sections include some of the considerations that you must keep in mind during disassembly and assembly procedures.

 **NOTE:** As you remove each subassembly from the tablet, place the subassembly (and all accompanying screws) away from the work area to prevent damage.

Plastic parts

 **CAUTION:** Using excessive force during disassembly and reassembly can damage plastic parts. Use care when handling the plastic parts. Apply pressure only at the points designated in the maintenance instructions.

Cables and connectors

 **CAUTION:** When servicing the tablet, be sure that cables are placed in their proper locations during the reassembly process. Improper cable placement can damage the tablet.

Cables must be handled with extreme care to avoid damage. Apply only the tension required to unseat or seat the cables during removal and insertion. Handle cables by the connector whenever possible. In all cases, avoid bending, twisting, or tearing cables. Be sure that cables are routed in such a way that they cannot be caught or snagged by parts being removed or replaced. Handle flex cables with extreme care; these cables tear easily.

Grounding guidelines

Electrostatic discharge damage

Electronic components are sensitive to electrostatic discharge (ESD). Circuitry design and structure determine the degree of sensitivity. Networks built into many integrated circuits provide some protection, but in many cases, ESD contains enough power to alter device parameters or melt silicon junctions.

A discharge of static electricity from a finger or other conductor can destroy static-sensitive devices or microcircuitry. Even if the spark is neither felt nor heard, damage may have occurred.

An electronic device exposed to ESD may not be affected at all and can work perfectly throughout a normal cycle. Or the device may function normally for a while, then degrade in the internal layers, reducing its life expectancy.

CAUTION: To prevent damage to the tablet when you are removing or installing internal components, observe these precautions:

Keep components in their electrostatic-safe containers until you are ready to install them.

Before touching an electronic component, discharge static electricity by using the guidelines described in this section.

Avoid touching pins, leads, and circuitry. Handle electronic components as little as possible.

If you remove a component, place it in an electrostatic-safe container.

The following table shows how humidity affects the electrostatic voltage levels generated by different activities.

CAUTION: A product can be degraded by as little as 700 V.

Typical electrostatic voltage levels			
Event	Relative humidity		
	10%	40%	55%
Walking across carpet	35,000 V	15,000 V	7,500 V
Walking across vinyl floor	12,000 V	5,000 V	3,000 V
Motions of bench worker	6,000 V	800 V	400 V
Removing DIPS from plastic tube	2,000 V	700 V	400 V
Removing DIPS from vinyl tray	11,500 V	4,000 V	2,000 V
Removing DIPS from Styrofoam	14,500 V	5,000 V	3,500 V
Removing bubble pack from PCB	26,500 V	20,000 V	7,000 V
Packing PCBs in foam-lined box	21,000 V	11,000 V	5,000 V

Packaging and transporting guidelines

Follow these grounding guidelines when packaging and transporting equipment:

- To avoid hand contact, transport products in static-safe tubes, bags, or boxes.
- Protect ESD-sensitive parts and assemblies with conductive or approved containers or packaging.
- Keep ESD-sensitive parts in their containers until the parts arrive at static-free workstations.
- Place items on a grounded surface before removing items from their containers.
- Always be properly grounded when touching a component or assembly.
- Store reusable ESD-sensitive parts from assemblies in protective packaging or nonconductive foam.
- Use transporters and conveyors made of antistatic belts and roller bushings. Be sure that mechanized equipment used for moving materials is wired to ground and that proper materials are selected to avoid static charging. When grounding is not possible, use an ionizer to dissipate electric charges.

Workstation guidelines

Follow these grounding workstation guidelines:

- Cover the workstation with approved static-shielding material.
- Use a wrist strap connected to a properly grounded work surface and use properly grounded tools and equipment.
- Use conductive field service tools, such as cutters, screw drivers, and vacuums.
- When fixtures must directly contact dissipative surfaces, use fixtures made only of static-safe materials.
- Keep the work area free of nonconductive materials, such as ordinary plastic assembly aids and Styrofoam.
- Handle ESD-sensitive components, parts, and assemblies by the case or PCM laminate. Handle these items only at static-free workstations.
- Avoid contact with pins, leads, or circuitry.
- Turn off power and input signals before inserting or removing connectors or test equipment.

Equipment guidelines

Grounding equipment must include either a wrist strap or a foot strap at a grounded workstation.

- When seated, wear a wrist strap connected to a grounded system. Wrist straps are flexible straps with a minimum of one megohm $\pm 10\%$ resistance in the ground cords. To provide proper ground, wear a strap snugly against the skin at all times. On grounded mats with banana-plug connectors, use alligator clips to connect a wrist strap.
- When standing, use foot straps and a grounded floor mat. Foot straps (heel, toe, or boot straps) can be used at standing workstations and are compatible with most types of shoes or boots. On conductive floors or dissipative floor mats, use foot straps on both feet with a minimum of one megohm resistance between the operator and ground. To be effective, the conductive must be worn in contact with the skin.

The following grounding equipment is recommended to prevent electrostatic damage:

- Antistatic tape
- Antistatic smocks, aprons, and sleeve protectors
- Conductive bins and other assembly or soldering aids
- Nonconductive foam
- Conductive tabletop workstations with ground cords of one megohm resistance
- Static-dissipative tables or floor mats with hard ties to the ground
- Field service kits
- Static awareness labels
- Material-handling packages
- Nonconductive plastic bags, tubes, or boxes
- Metal tote boxes
- Electrostatic voltage levels and protective materials

The following table lists the shielding protection provided by antistatic bags and floor mats.

Material	Use	Voltage protection level
Antistatic plastics	Bags	1,500 V
Carbon-loaded plastic	Floor mats	7,500 V
Metallized laminate	Floor mats	5,000 V

5 Removal and replacement procedures for Authorized Service Provider parts

-
-  **NOTE:** Components described in this chapter should only be accessed by an authorized service provider. Accessing these parts can damage the computer or void the warranty.
 -  **NOTE:** Details about your computer, including model, serial number, product key, and length of warranty, are on the service tag at the bottom of your computer. See [Labels on page 11](#) for details.
 -  **NOTE:** HP continually improves and changes product parts. For complete and current information on supported parts for your computer, go to <http://partsurfer.hp.com>, select your country or region, and then follow the on-screen instructions.
-

Component replacement procedures

This chapter provides removal and replacement procedures for Authorized Service Provider only parts.

There are as many as 44 screws that must be removed, replaced, and/or loosened when servicing the computer. Make special note of each screw size and location during removal and replacement.

Bottom cover


Description	Spare part number
Bottom cover for use in blue models	905564-001
Bottom cover for use in purple models	905690-001
Bottom cover for use in white models	910176-001

Before removing the bottom cover, follow these steps:

1. Turn off the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect the power from the computer by unplugging the power cord from the computer.
3. Disconnect all external devices from the computer.

Remove the bottom cover:

1. Position the computer upside down.
2. Peel the two rubber strips off the bottom cover **(1)** to gain access to the screws underneath.
3. Remove eight Phillips PM2.5×6.0 screws **(2)** that secure the bottom cover to the computer.
4. Pry around the edges to disengage the bottom cover from the computer **(3)**.
5. Lift the bottom cover from the computer **(4)**.

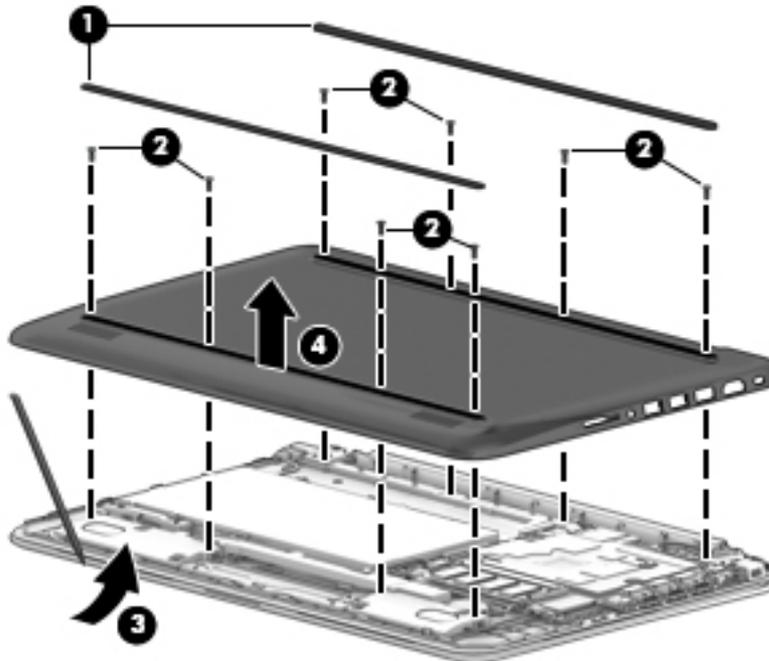

Reverse this procedure to install the bottom cover.

Battery


Description	Spare part number
Battery, 3-cell, 41-WHr, 3.615-AHr, Li-ion	844203-855
Battery cable	905566-001

Before removing the battery, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).

Remove the battery:

1. Disconnect the battery cable from the system board **(1)**.
2. Remove the three PM2.0×2.5 screws **(2)** that secure the battery to the computer.
3. Remove the two PM2.0×6.0 screws **(3)** that secure the connector to the computer.
4. Lift the battery and the connector from the computer **(4)**.
5. Disconnect the connector from the battery **(5)**.
6. If replacing the battery cable, remove the cable from its routing path in the computer **(6)**.

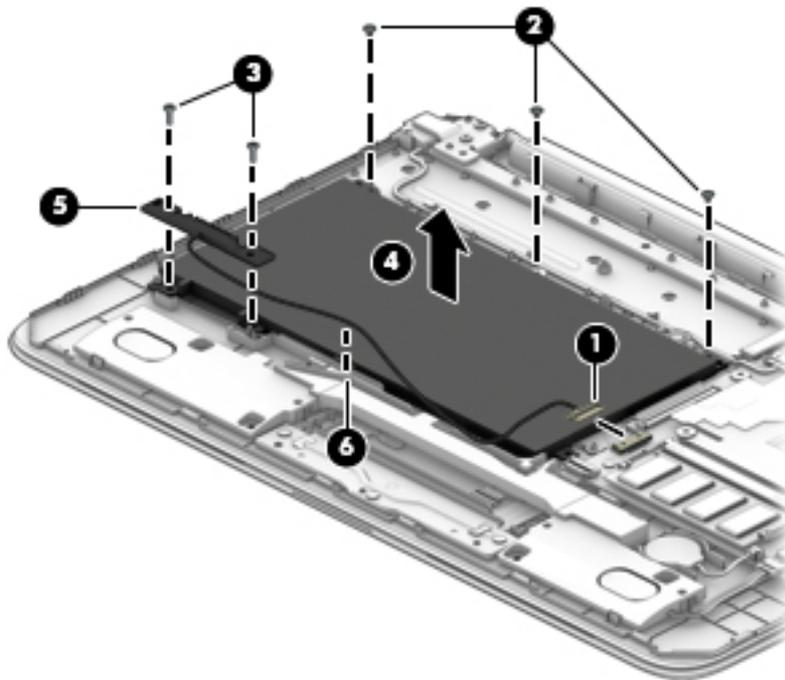

Reverse this procedure to install the battery.

Memory module


Description	Spare part number
Memory module, 4 GB (PC3L, 12800, 1600-MHz)	691740-005

Before removing a memory module, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).

To remove a memory module:

1. Spread the retaining tabs **(1)** on each side of the memory module slot to release the memory module. (The memory module tilts up.)
2. Remove the memory module **(2)** by pulling it away from the slot at an angle.

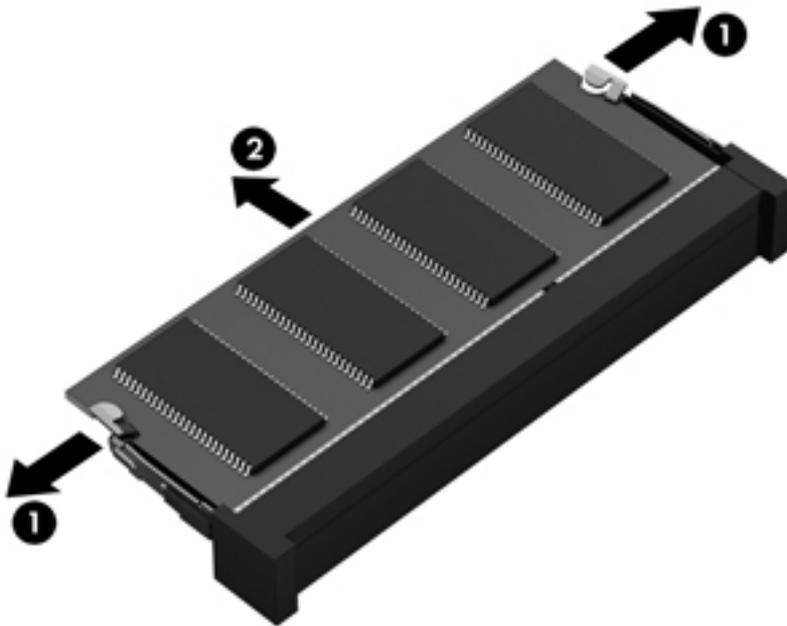

Reverse this procedure to install a memory module.

WLAN module

Description	Spare part number
Intel Dual Band Wireless-AC 7265 802.11 AC 2x2 WiFi + BT 4.2 Combo Adapter (non-vPro)	793840-005

 **CAUTION:** To prevent an unresponsive system, replace the wireless module only with a wireless module authorized for use in the computer by the governmental agency that regulates wireless devices in your country or region. If you replace the module and then receive a warning message, remove the module to restore device functionality, and then contact technical support.

Before removing the WLAN module, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).

Remove the WLAN module:

1. Disconnect the WLAN antenna cables **(1)** from the terminal on the WLAN module.




NOTE: The 1/black WLAN antenna cable is connected to the WLAN module 1/Main terminal.


Either one or two antennas may be connected to the module.

2. Remove the Phillips PM2.0×3.0 screw **(2)** that secures the WLAN module to the computer. (The WLAN module tilts up.)

3. Remove the WLAN module (3) by pulling the module away from the slot at an angle.

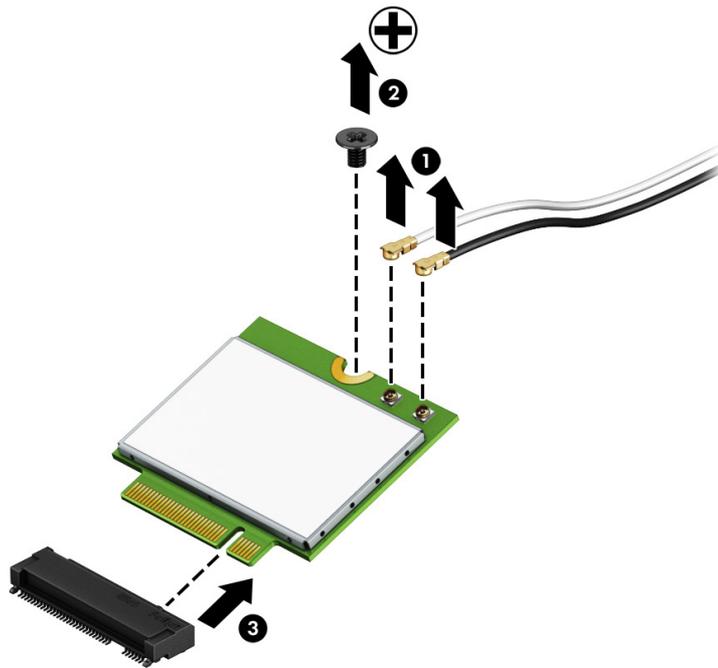

 **NOTE:** If the WLAN antenna is not connected to the terminal on the WLAN module, a protective sleeve must be installed on the antenna connector, as shown in the following illustration.

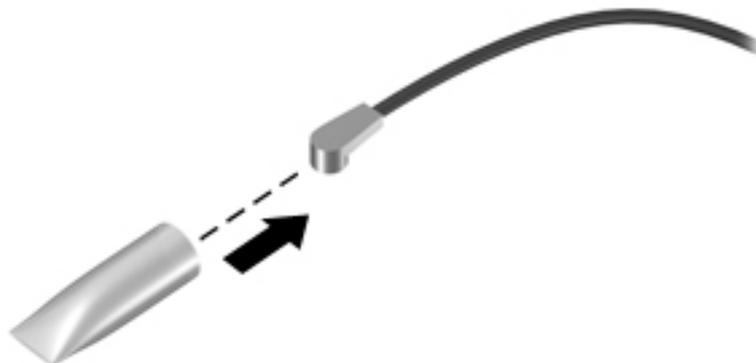

Reverse this procedure to install the WLAN module.

RTC battery

Description	Spare part number
RTC battery	857380-001

Before removing the RTC battery, follow these steps:


1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).

To remove the RTC battery:

- ▲ Disconnect the RTC battery cable from the system board **(1)**, and then lift the RTC battery from the computer **(2)**.



NOTE: The RTC battery is secured with double-sided tape.

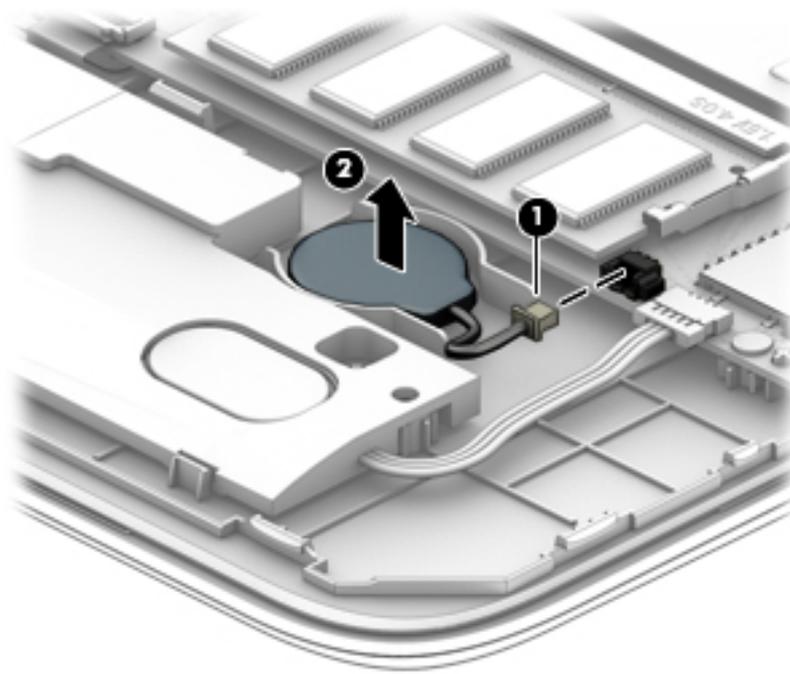

Reverse this procedure to install the RTC battery.

Heat sink


Description	Spare part number
Heat sink	907105-001

Before removing the heat sink, follow these steps:


1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).

Remove the heat sink:

1. Remove the two Phillips broad head PM2.0×2.0 screws **(1)** that secure the heat sink to the system board.
2. Lift the heat sink off the system board **(2)**.

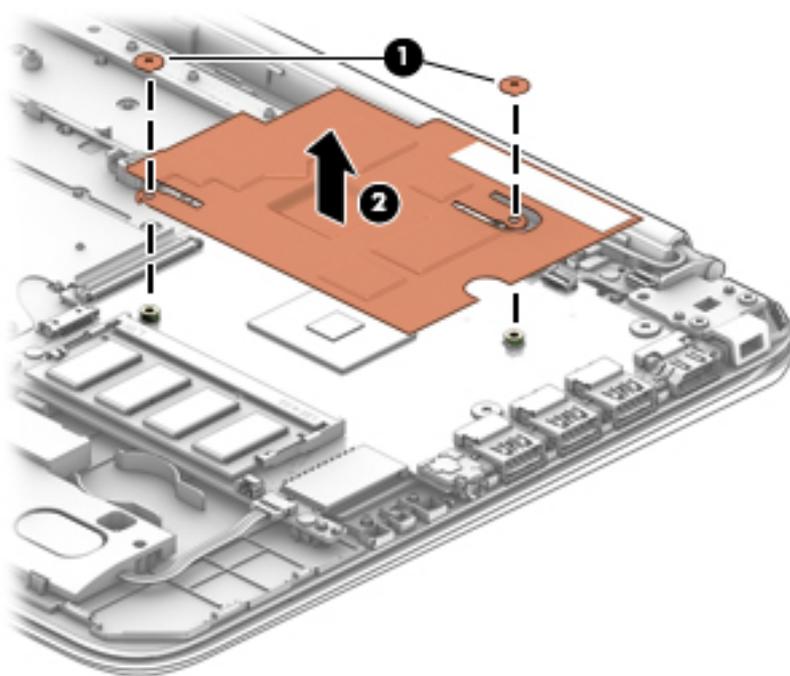

 **NOTE:** The thermal material must be thoroughly cleaned from the surfaces of the heat sink and the system board each time the heat sink is removed. Thermal material is used on the processor **(1)** and the heat sink section **(2)** that services it.

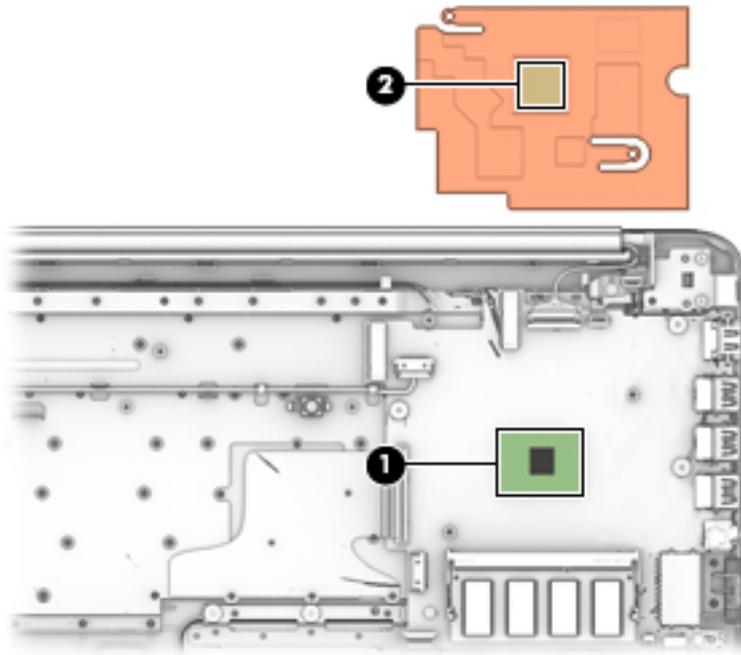

Reverse this procedure to install the heat sink.

Speakers


Description	Spare part number
Speakers (includes cable)	905565-001

Before removing the speakers, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Remove the battery (see [Battery on page 24](#)).

Remove the speakers:

1. Disconnect the speaker cable **(1)** from the system board.
2. Lift the speakers from the computer **(2)**.

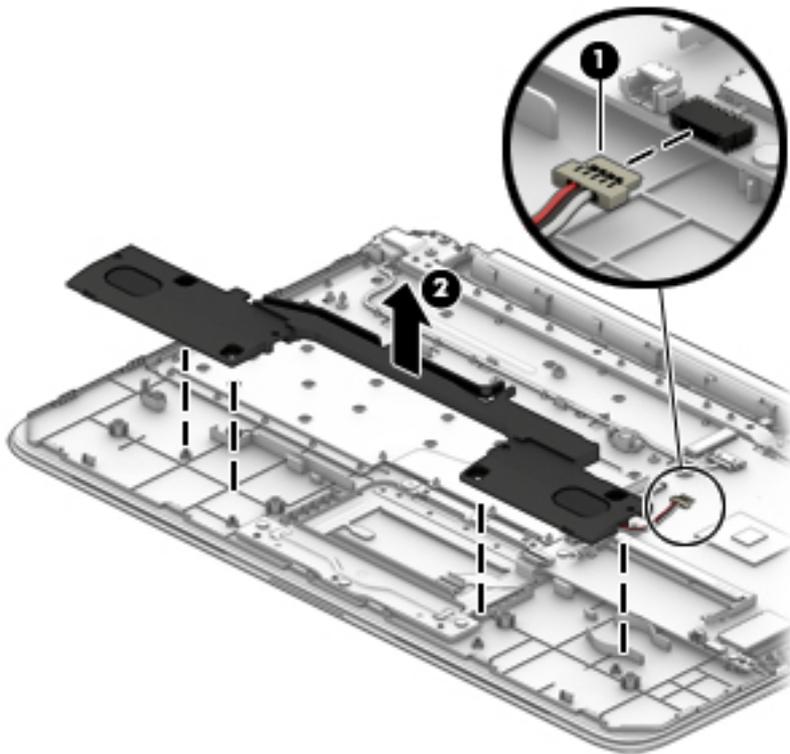

Reverse this procedure to install the speakers.

System board


Description	Spare part number
Intel Celeron N3060 processor, 2 GB system memory, 32 GB eMMC hard drive, and a non-Windows operating system	905302-001
Intel Celeron N3060 processor, 2 GB system memory, 32 GB eMMC hard drive, and the Windows 10 operating system	905302-601
Intel Celeron N3060 processor, 32 GB eMMC hard drive, and a non-Windows operating system	905305-001
Intel Celeron N3060 processor, 32 GB eMMC hard drive, and the Windows 10 operating system	905305-601
Intel Celeron N3050 processor, 2 GB system memory, 32 GB eMMC hard drive, and a non-Windows operating system	905304-001
Intel Celeron N3050 processor, 2 GB system memory, 32 GB eMMC hard drive, and the Windows 10 operating system	905304-601
Intel Celeron N3050 processor, 32 GB eMMC hard drive, and a non-Windows operating system	905306-001
Intel Celeron N3050 processor, 32 GB eMMC hard drive, and the Windows 10 operating system	905306-601

Before removing the system board, follow these steps:


1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Remove the WLAN module (see [WLAN module on page 26](#)).
6. Remove the heat sink (see [Heat sink on page 29](#)).

Remove the system board:

1. Disconnect the following cables from the system board:
 - (1): Power button board cable
 - (2): Display cable
 - (3): Power connector cable
 - (4): Keyboard cable
 - (5): Battery cable
 - (6): TouchPad cable
 - (7): RTC battery cable

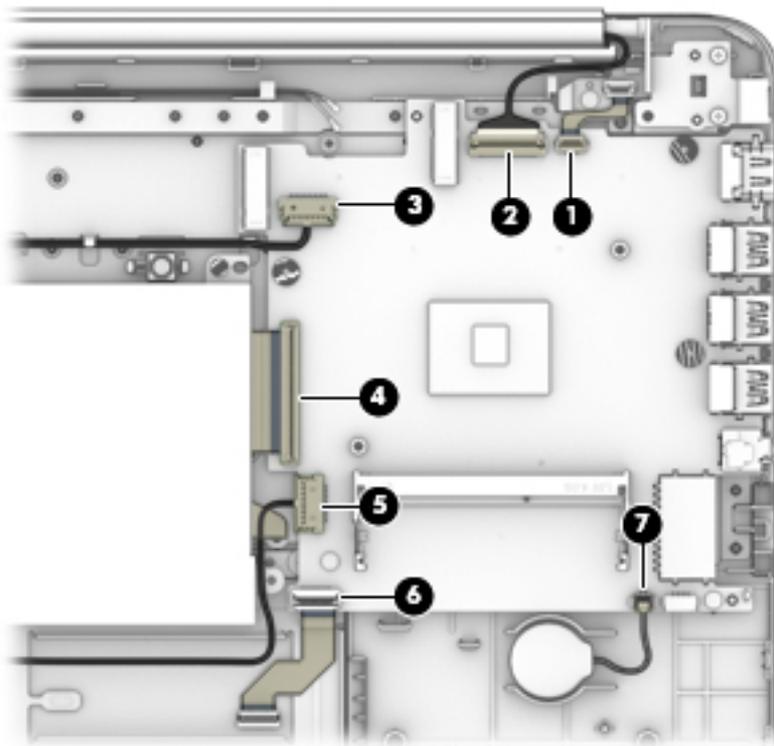

2. Remove the three black Phillips broad head PM2.0×2.5 screws **(1)** that secure the system board to the computer.
3. Remove the two silver Phillips PM2.0×2.5 screws **(2)** that secure the system board to the computer.
4. Lift up the left side of the system board **(3)**, and then pull the system board toward the left to remove it from the computer **(4)**.

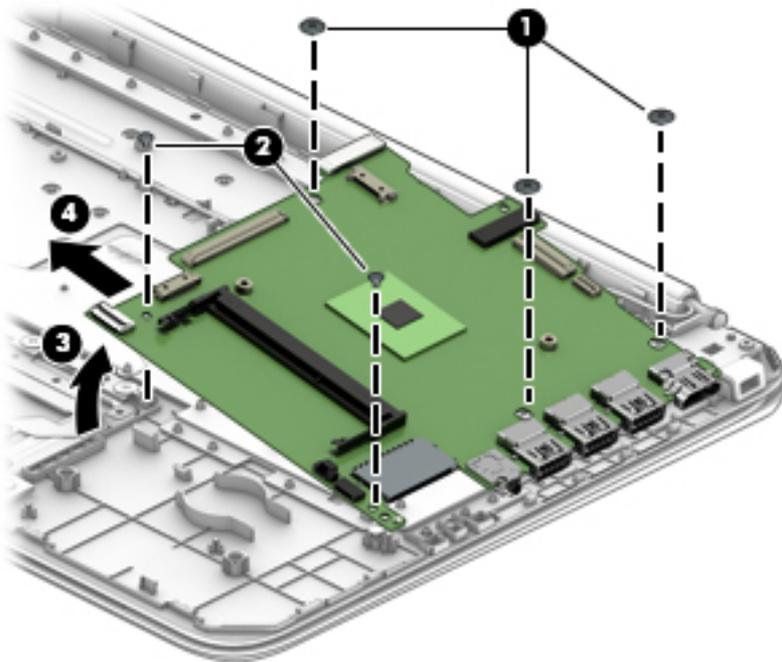

Reverse this procedure to install the system board.

TouchPad


Description	Spare part number
TouchPad for use in blue models	905691-001
TouchPad for use in purple models	906174-001
TouchPad for use in white models	910178-001
TouchPad cable	905563-001

Before removing the TouchPad, follow these steps:

1. Turn off the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect the power from the computer by unplugging the power cord from the computer.
3. Disconnect all external devices from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).
6. Remove the system board (see [System board on page 32](#)).

Remove the TouchPad:

1. Remove the three Phillips PM2.0×3.0 screws **(1)** that secure the TouchPad bracket to the computer, and the lift the bracket from the computer **(2)**.
2. Disconnect the cable from the TouchPad **(3)**.
3. Remove the three Phillips PM2.0×3.0 screws **(4)** that secure the TouchPad to the computer, and the lift the Touchpad from the computer **(5)**.

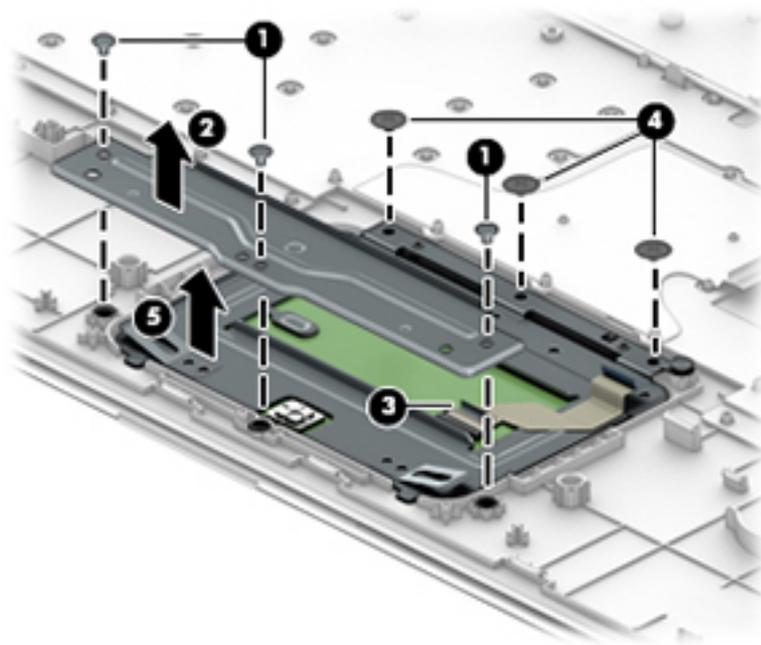

Reverse this procedure to install the TouchPad.

Display assembly


 **NOTE:** The display assembly is spared at the subcomponent level only. For display assembly spare part information, see the individual removal subsections.

Before removing the display assembly, follow these steps:

1. Turn off the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect the power from the computer by unplugging the power cord from the computer.
3. Disconnect all external devices from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).


Remove the display assembly:

1. Remove the WLAN antennas from the routing path in the computer (**1**).
2. Remove the four Phillips PM2.5×5.0 screws (**2**) that secure the display assembly to the computer.
3. Lift the display assembly from the computer (**3**).

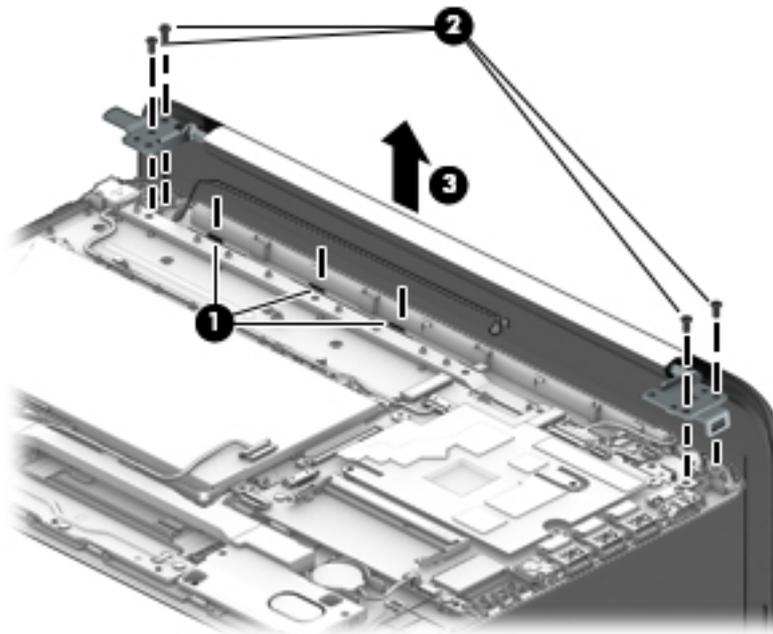


4. If it is necessary to replace the display bezel:
 - a. Flex the inside edges of the top edge (**1**), the left and right sides (**2**), and the bottom edge (**3**) of the display bezel until the bezel disengages from the display back cover.
 - b. Remove the display bezel (**4**).

The display bezel is available using spare part number 905559-001 for blue models, 905689-001 for purple models, and 910177-001 for white models.

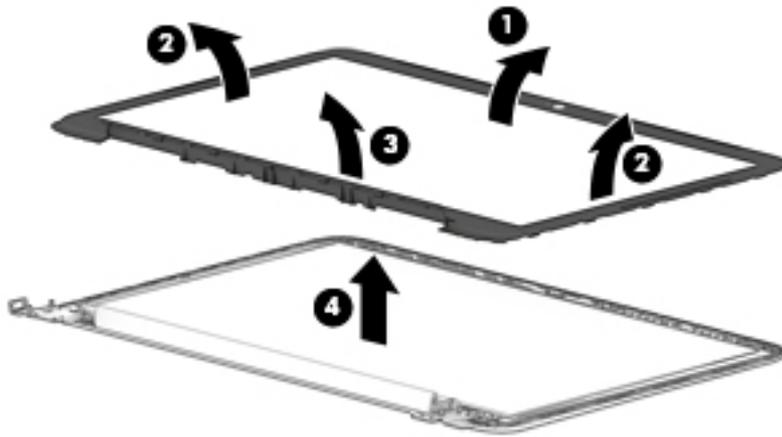

5. If it is necessary to replace the webcam/microphone module:
- a. Detach and lift the module **(1)** from the display back cover. (The webcam/microphone module is attached to the display back cover with double-sided adhesive.)
 - b. Disconnect the webcam/microphone module cable **(2)** from the module.
- The webcam/microphone module is available using spare part number 766523-025.

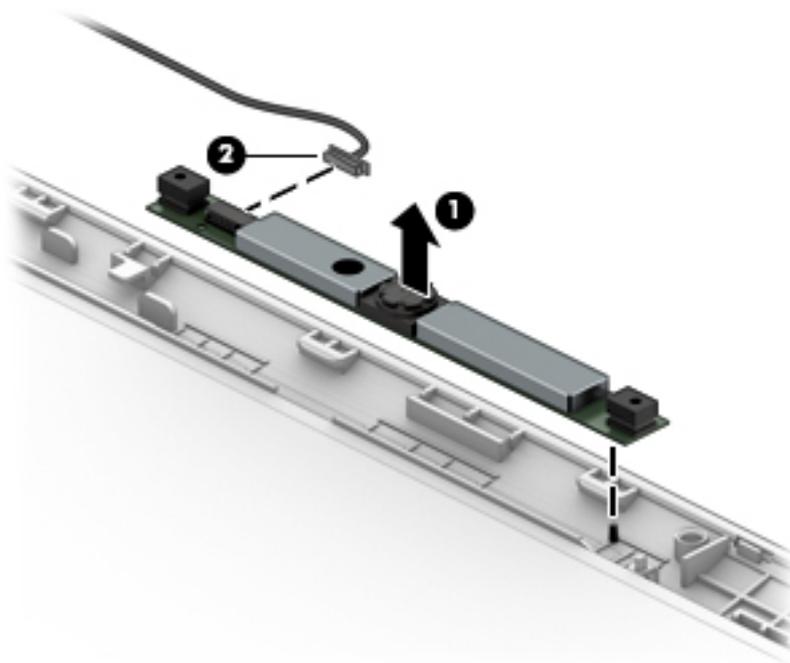


6. If it is necessary to replace the display panel:
- a. Remove the four Phillips PM2.0×3.0 screws **(1)** that secure the display panel to the display back cover.


⚠ CAUTION: Before turning the display panel upside down, make sure the work surface is clear of tools, screws, and any other foreign objects. Failure to follow this caution can result in damage to the display panel.

- b. Lift the top edge of the display panel (2) and swing it up and forward until it rests upside down in front of the display back cover.

The raw display panel is available using spare part number 847664-005.

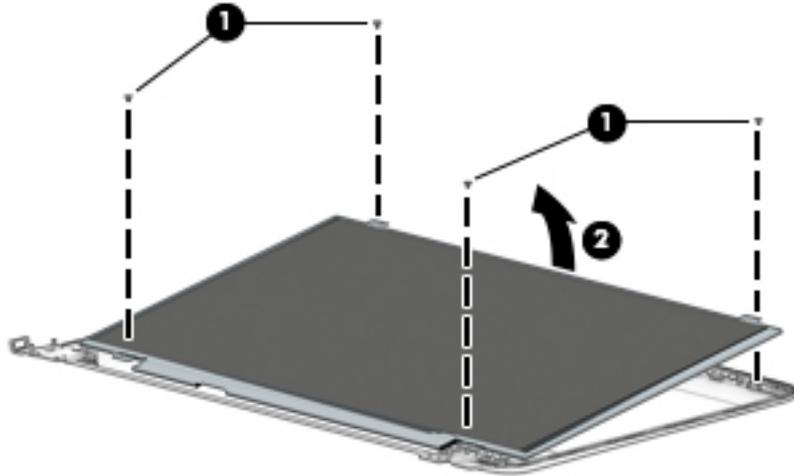


- c. Release the adhesive strip (1) that secures the display panel cable connector to the display panel.
- d. Disconnect the display panel cable (2) from the display panel.
- e. Remove the display panel from the computer (3).

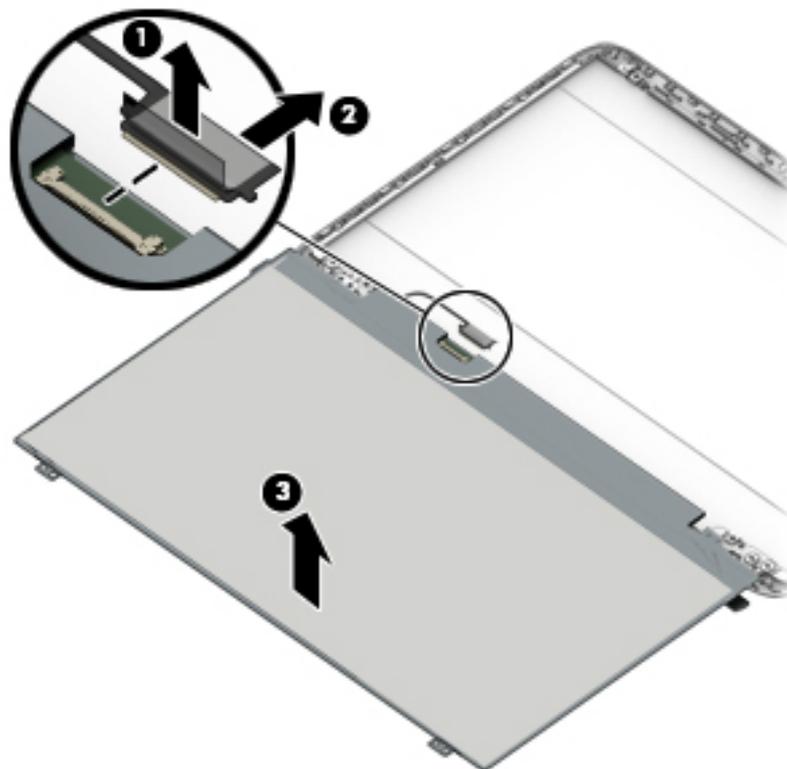

- 7. If it is necessary to replace the display hinges:

- a. Remove the two Phillips PM2.0×3.0 screws **(1)** on the top of the hinges.
- b. Remove the four Phillips PM2.5×2.5 screws **(2)** on the outside bottom of the hinges and the two Phillips PM2.5×4.0 screws **(3)** at the inside bottom of the hinges.
- c. Remove the display hinges **(4)**.

The display hinges are included in the Display Hinge Kit, spare part number 905560-001.

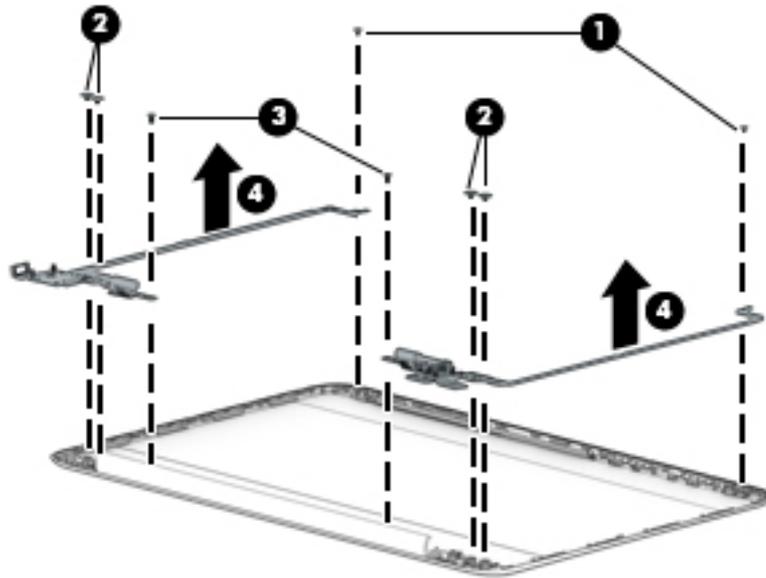


8. If it is necessary to replace the display panel cable:
 - a. Release the display panel cable from the retention clips **(1)** and channel built into the left side of the display back cover.

- b.** Remove the display panel cable **(2)**.

The display panel cable includes the webcam/microphone module cable and is available using spare part number 905561-001.

 **IMPORTANT:** Be sure to note the way the cable routes into the display hinge, as shown in the following image.

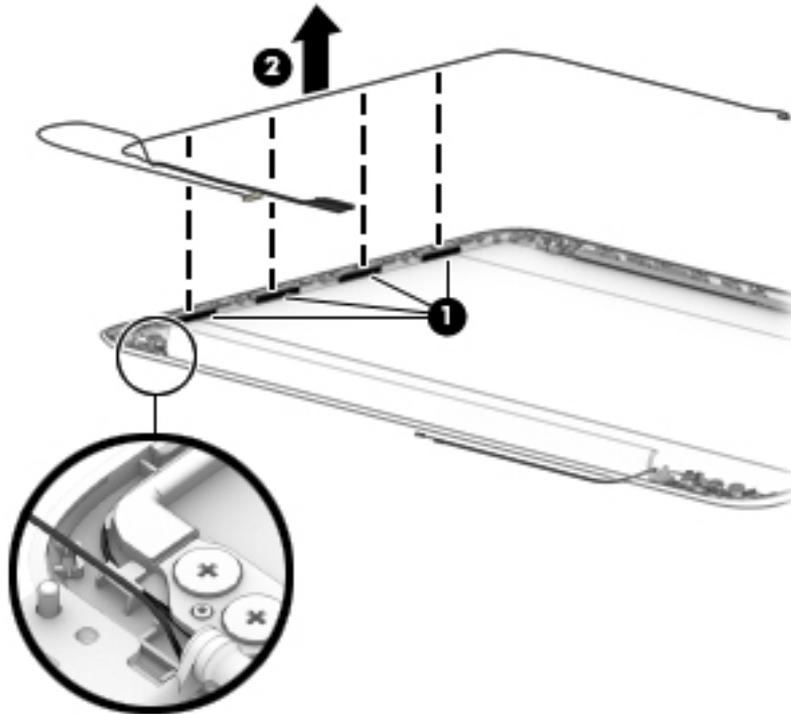


- 9.** If it is necessary to replace the WLAN antenna cable and transceiver:
 - a.** Release the antenna cable from the retention clips **(1)** and channel built into the right side of the display back cover.

- b.** Peel the antenna transceivers from the top of the display enclosure, and then remove the antennas from the enclosure **(2)**.

The antenna cables and transceivers are included in the WLAN Antenna Kit, spare part number 906173-001.

 **IMPORTANT:** Be sure to note the way the antenna cable routes into the display hinge, as shown in the following image.

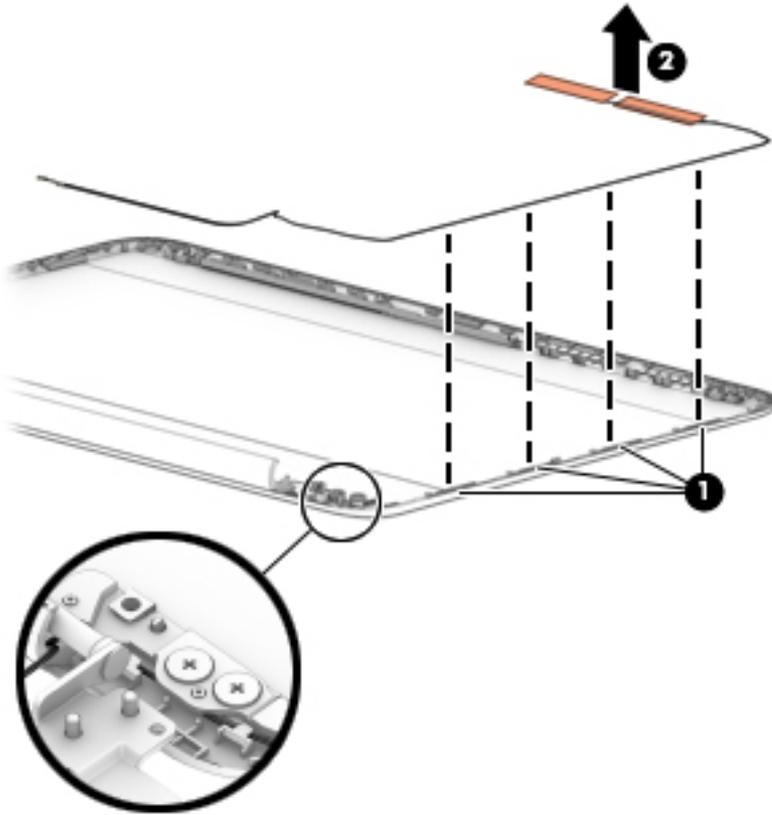

Reverse this procedure to reassemble and install the display assembly.

Power button board


Description	Spare part number
Power button board	905579-001
Power button board cable	905562-001

Before removing the power button board, follow these steps:

1. Turn off the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect the power from the computer by unplugging the power cord from the computer.
3. Disconnect all external devices from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).
6. Remove the display assembly (see [Display assembly on page 35](#)).

Remove the power button board:

1. Disconnect the cable from the power button board **(1)**.
2. Remove the PM2.0×3.0 screw **(2)** that secures the power button board to the computer.
3. Lift the board from the computer **(3)**.

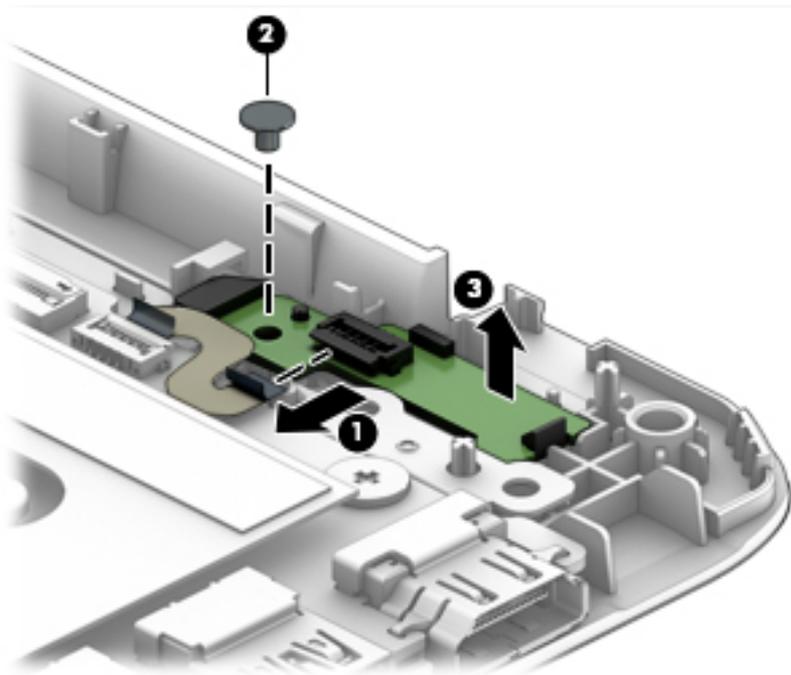

Reverse this procedure to install the power button board.

Power connector cable


Description	Spare part number
Power connector cable	810327-004

Before removing the power connector cable, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the bottom cover (see [Bottom cover on page 23](#)).
5. Disconnect the battery cable from the system board (see [Battery on page 24](#)).
6. Remove the display assembly (see [Display assembly on page 35](#)).

Remove the power connector cable:

1. Disconnect the power connector cable **(1)** from the system board.
2. Release the power connector **(2)** from the retention clips built into the bottom cover.
3. Remove the power connector cable **(3)**.

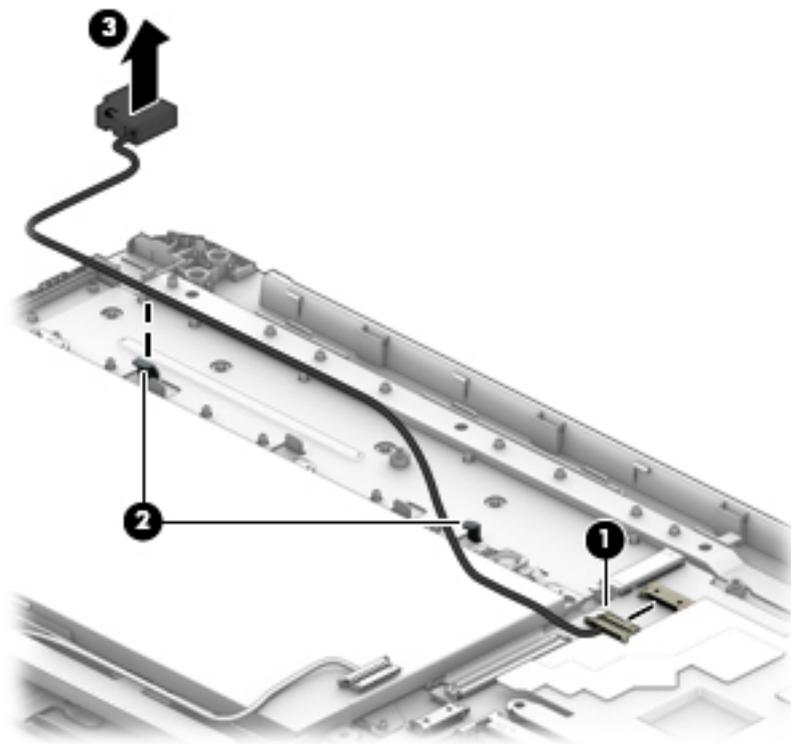

Reverse this procedure to install the power connector cable.

Keyboard/top cover

The top cover/keyboard spare part remains after all other spare parts have been removed.

In this section, the first table provides the main spare part number for the keyboards. The second table provides the country codes.

Description	Spare part number
Blue models	905569-xx1
Purple models	905570-xx1
White models	910180-xx1

For use in country or region	Spare part number	For use in country or region	Spare part number	For use in country or region	Spare part number
Belgium	-A41	Hungary	-211	Saudi Arabia	-171
Bulgaria	-261	Israel	-BB1	Slovenia	-BA1
Canada	-DB1	Italy	-061	Spain	-071
Czech Republic and Slovakia	-FL1	Latin America	-161	Switzerland	-BG1
Denmark, Finland, and Norway	-DH1	The Netherlands	-B31	Turkey	-141
France	-051	Portugal	-131	United Kingdom	-031
Germany	-041	Romania	-271	United States	-001
Greece	-151	Russia	-251		

6 Using Setup Utility (BIOS)

Setup Utility, or Basic Input/Output System (BIOS), controls communication between all the input and output devices on the system (such as disk drives, display, keyboard, mouse, and printer). Setup Utility (BIOS) includes settings for the types of devices installed, the startup sequence of the computer, and the amount of system and extended memory.

 **NOTE:** To start Setup Utility on convertible computers, your computer must be in notebook mode and you must use the keyboard attached to your notebook.

Starting Setup Utility (BIOS)

 **CAUTION:** Use extreme care when making changes in Setup Utility (BIOS). Errors can prevent the computer from operating properly.

- ▲ Turn on or restart the computer, quickly press `esc`, and then press `f10`.

Updating Setup Utility (BIOS)

Updated versions of Setup Utility (BIOS) may be available on the HP website.

Most BIOS updates on the HP website are packaged in compressed files called *SoftPaqs*.

Some download packages contain a file named `Readme.txt`, which contains information regarding installing and troubleshooting the file.

Determining the BIOS version

To decide whether you need to update Setup Utility (BIOS), first determine the BIOS version on your computer.

To reveal the BIOS version information (also known as *ROM date* and *System BIOS*), use one of these options.

- HP Support Assistant
 1. Type `support` in the taskbar search box, and then select the **HP Support Assistant** app.
– or –
Click the question mark icon in the taskbar.
 2. Select **My PC**, and then select **Specifications**.
- Setup Utility (BIOS)
 1. Start Setup Utility (BIOS) (see [Starting Setup Utility \(BIOS\) on page 44](#)).
 2. Select **Main**, select **System Information**, and then make note of the BIOS version.
 3. Select **Exit**, select **No**, and then follow the on-screen instructions.

To check for later BIOS versions, see [Downloading a BIOS update on page 45](#).

Downloading a BIOS update

 **CAUTION:** To reduce the risk of damage to the computer or an unsuccessful installation, download and install a BIOS update only when the computer is connected to reliable external power using the AC adapter. Do not download or install a BIOS update while the computer is running on battery power, docked in an optional docking device, or connected to an optional power source. During the download and installation, follow these instructions:

- Do not disconnect power from the computer by unplugging the power cord from the AC outlet.
- Do not shut down the computer or initiate Sleep.
- Do not insert, remove, connect, or disconnect any device, cable, or cord.

 **NOTE:** If your computer is connected to a network, consult the network administrator before installing any software updates, especially system BIOS updates.

1. Type `support` in the taskbar search box, and then select the **HP Support Assistant** app.
– or –
Click the question mark icon in the taskbar.
2. Click **Updates**, and then click **Check for updates and messages**.
3. Follow the on-screen instructions.
4. At the download area, follow these steps:
 - a. Identify the most recent BIOS update and compare it to the BIOS version currently installed on your computer. If the update is more recent than your BIOS version, make a note of the date, name, or other identifier. You may need this information to locate the update later, after it has been downloaded to your hard drive.
 - b. Follow the on-screen instructions to download your selection to the hard drive.

Make a note of the path to the location on your hard drive where the BIOS update is downloaded. You will need to access this path when you are ready to install the update.

BIOS installation procedures vary. Follow any instructions that appear on the screen after the download is complete. If no instructions appear, follow these steps:

1. Type `file` in the taskbar search box, and then select **File Explorer**.
2. Click your hard drive designation. The hard drive designation is typically Local Disk (C:).
3. Using the hard drive path you recorded earlier, open the folder that contains the update.
4. Double-click the file that has an `.exe` extension (for example, `filename.exe`).

The BIOS installation begins.
5. Complete the installation by following the on-screen instructions.

 **NOTE:** After a message on the screen reports a successful installation, you can delete the downloaded file from your hard drive.

7 Specifications

Computer specifications

	Metric	U.S.
Width	33.7 cm	13.27 in
Depth	22.6 cm	8.90 in
Height	1.79 cm	0.71 in
Weight	1.44 kg	3.18 lbs
Input power		
Operating voltage and current	19.5 V dc @ 2.31 A – 45 W 19.5 V dc @ 3.33 A – 65 W (select models only)	
Temperature		
Operating	5°C to 35°C	41°F to 95°F
Nonoperating	-20°C to 60°C	-4°F to 140°F
Relative humidity (noncondensing)		
Operating	10% to 90%	
Nonoperating	5% to 95%	
Maximum altitude (unpressurized)		
Operating	-15 m to 3,048 m	-50 ft to 10,000 ft
Nonoperating	-15 m to 12,192 m	-50 ft to 40,000 ft
NOTE: Applicable product safety standards specify thermal limits for plastic surfaces. The device operates well within this range of temperatures.		

35.56-cm (14.0-in), HD display specifications

	Metric	U.S.
Active diagonal size	35.56-cm	14.0-in
Resolution	1366x768 (HD)	
Width	3.0 mm	
Surface treatment	BrightView	
Brightness	220 nits (typical)	
Viewing angle	SVA	
Backlight	LED	

8 Backing up, restoring, and recovering

This chapter provides information about the following processes. The information in the chapter is standard procedure for most products.

- Creating recovery media and backups
- Restoring and recovering your system

For additional information, refer to the HP support assistant app.

- ▲ Type `support` in the taskbar search box, and then select the **HP Support Assistant** app.

– or –

Click the question mark icon in the taskbar.



IMPORTANT: If you will be performing recovery procedures on a tablet, the tablet battery must be at least 70% charged before you start the recovery process.

IMPORTANT: For a tablet with a detachable keyboard, connect the keyboard to the keyboard dock before beginning any recovery process.

Creating recovery media and backups

The following methods of creating recovery media and backups are available on select products only. Choose the available method according to your computer model.

- Use HP Recovery Manager to create HP Recovery media after you successfully set up the computer. This step creates a backup of the HP Recovery partition on the computer. The backup can be used to reinstall the original operating system in cases where the hard drive is corrupted or has been replaced. For information on creating recovery media, see [Creating HP Recovery media \(select products only\) on page 48](#). For information on the recovery options that are available using the recovery media, see [Using Windows tools on page 49](#).
- Use Windows tools to create system restore points and create backups of personal information.

For more information, see [Recovering using HP Recovery Manager on page 50](#).



NOTE: If storage is 32 GB or less, Microsoft System Restore is disabled by default.

Creating HP Recovery media (select products only)

If possible, check for the presence of the Recovery partition and the Windows partition. From the **Start** menu, select **File Explorer**, and then select **This PC**.

- If your computer does not list the Windows partition and the Recovery partition, you can obtain recovery media for your system from support. See the *Worldwide Telephone Numbers* booklet included with the computer. You can also find contact information on the HP website. Go to <http://www.hp.com/support>, select your country or region, and follow the on-screen instructions.

You can use Windows tools to create system restore points and create backups of personal information, see [Using Windows tools on page 49](#).

- If your computer does list the Recovery partition and the Windows partition, you can use HP Recovery Manager to create recovery media after you successfully set up the computer. HP Recovery media can be used to perform system recovery if the hard drive becomes corrupted. System recovery reinstalls the original operating system and software programs that were installed at the factory and then configures the settings for the programs. HP Recovery media can also be used to customize the system or restore the factory image if you replace the hard drive.
 - Only one set of recovery media can be created. Handle these recovery tools carefully, and keep them in a safe place.
 - HP Recovery Manager examines the computer and determines the required storage capacity for the media that will be required.
 - To create recovery discs, your computer must have an optical drive with DVD writer capability, and you must use only high-quality blank DVD-R, DVD+R, DVD-R DL, or DVD+R DL discs. Do not use rewritable discs such as CD±RW, DVD±RW, double-layer DVD±RW, or BD-RE (rewritable Blu-ray) discs; they are not compatible with HP Recovery Manager software. Or, instead, you can use a high-quality blank USB flash drive.
 - If your computer does not include an integrated optical drive with DVD writer capability, but you would like to create DVD recovery media, you can use an external optical drive (purchased separately) to create recovery discs. If you use an external optical drive, it must be connected directly to a USB port on the computer; the drive cannot be connected to a USB port on an external device, such as a USB hub. If you cannot create DVD media yourself, you can obtain recovery discs for your computer from HP. See the *Worldwide Telephone Numbers* booklet included with the computer. You can also find contact information on the HP website. Go to <http://www.hp.com/support>, select your country or region, and follow the on-screen instructions.
 - Be sure that the computer is connected to AC power before you begin creating the recovery media.
 - The creation process can take an hour or more. Do not interrupt the creation process.
 - If necessary, you can exit the program before you have finished creating all of the recovery DVDs. HP Recovery Manager will finish burning the current DVD. The next time you start HP Recovery Manager, you will be prompted to continue.

To create HP Recovery media:

 **IMPORTANT:** For a tablet with a detachable keyboard, connect the keyboard to the keyboard dock before beginning these steps.

1. Type `recovery` in the taskbar search box, and then select **HP Recovery Manager**.
2. Select **Create recovery media**, and then follow the on-screen instructions.

If you ever need to recover the system, see [Recovering using HP Recovery Manager on page 50](#).

Using Windows tools

You can create recovery media, system restore points, and backups of personal information using Windows tools.

 **NOTE:** If storage is 32 GB or less, Microsoft System Restore is disabled by default.

For more information and steps, see the Get started app.

- ▲ Select the **Start** button, and then select the **Get started** app.

Restore and recovery

There are several options for recovering your system. Choose the method that best matches your situation and level of expertise:



IMPORTANT: Not all methods are available on all products.

- Windows offers several options for restoring from backup, refreshing the computer, and resetting the computer to its original state. For more information see the Get started app.
 - ▲ Select the **Start** button, and then select the **Get started** app.
- If you need to correct a problem with a preinstalled application or driver, use the Reinstall drivers and/or applications option (select products only) of HP Recovery Manager to reinstall the individual application or driver.
 - ▲ Type `recovery` in the taskbar search box, select **HP Recovery Manager**, select **Reinstall drivers and/or applications**, and then follow the on-screen instructions.
- If you want to recover the Windows partition to original factory content, you can choose the System Recovery option from the HP Recovery partition (select products only) or use the HP Recovery media. For more information, see [Recovering using HP Recovery Manager on page 50](#). If you have not already created recovery media, see [Creating HP Recovery media \(select products only\) on page 48](#).
- On select products, if you want to recover the computer's original factory partition and content, or if you have replaced the hard drive, you can use the Factory Reset option of HP Recovery media. For more information, see [Recovering using HP Recovery Manager on page 50](#).
- On select products, if you want to remove the recovery partition to reclaim hard drive space, HP Recovery Manager offers the Remove Recovery Partition option.

For more information, see [Removing the HP Recovery partition \(select products only\) on page 53](#).

Recovering using HP Recovery Manager

HP Recovery Manager software allows you to recover the computer to its original factory state by using the HP Recovery media that you either created or that you obtained from HP, or by using the HP Recovery partition (select products only). If you have not already created recovery media, see [Creating HP Recovery media \(select products only\) on page 48](#).

What you need to know before you get started

- HP Recovery Manager recovers only software that was installed at the factory. For software not provided with this computer, you must either download the software from the manufacturer's website or reinstall the software from the media provided by the manufacturer.



IMPORTANT: Recovery through HP Recovery Manager should be used as a final attempt to correct computer issues.

- HP Recovery media must be used if the computer hard drive fails. If you have not already created recovery media, see [Creating HP Recovery media \(select products only\) on page 48](#).
- To use the Factory Reset option (select products only), you must use HP Recovery media. If you have not already created recovery media, see [Creating HP Recovery media \(select products only\) on page 48](#).
- If your computer does not allow the creation of HP Recovery media or if the HP Recovery media does not work, you can obtain recovery media for your system from support. See the *Worldwide Telephone Numbers* booklet included with the computer. You can also find contact information from the HP

website. Go to <http://www.hp.com/support>, select your country or region, and follow the on-screen instructions.

 **IMPORTANT:** HP Recovery Manager does not automatically provide backups of your personal data. Before beginning recovery, back up any personal data you want to retain.

Using HP Recovery media, you can choose from one of the following recovery options:

 **NOTE:** Only the options available for your computer display when you start the recovery process.

- System Recovery—Reinstalls the original operating system, and then configures the settings for the programs that were installed at the factory.
- Factory Reset—Restores the computer to its original factory state by deleting all information from the hard drive and re-creating the partitions. Then it reinstalls the operating system and the software that was installed at the factory.

The HP Recovery partition (select products only) allows System Recovery only.

Using the HP Recovery partition (select products only)

The HP Recovery partition allows you to perform a system recovery without the need for recovery discs or a recovery USB flash drive. This type of recovery can be used only if the hard drive is still working.

To start HP Recovery Manager from the HP Recovery partition:

 **IMPORTANT:** For a tablet with a detachable keyboard, connect the keyboard to the keyboard dock before beginning these steps (select products only).

1. Type `recovery` in the taskbar search box, select **Recovery Manager**, and then select **HP Recovery Environment**.

- or -

For computers or tablets with keyboards attached, press **f11** while the computer boots, or press and hold **f11** as you press the power button.

For tablets without keyboards:

Turn on or restart the tablet, and then quickly hold down the volume up button; then select **f11**.

- or -

Turn on or restart the tablet, and then quickly hold down the volume down button; then select **f11**.

- or -

Turn on or restart the tablet, and then quickly hold down the Windows button; then select **f11**.

2. Select **Troubleshoot** from the boot options menu.
3. Select **Recovery Manager**, and then follow the on-screen instructions.

Using HP Recovery media to recover

You can use HP Recovery media to recover the original system. This method can be used if your system does not have an HP Recovery partition or if the hard drive is not working properly.

1. If possible, back up all personal files.
2. Insert the HP Recovery media, and then restart the computer.



NOTE: If the computer does not automatically restart in HP Recovery Manager, change the computer boot order. See [Changing the computer boot order on page 52](#).

3. Follow the on-screen instructions.

Changing the computer boot order

If your computer does not restart in HP Recovery Manager, you can change the computer boot order, which is the order of devices listed in BIOS where the computer looks for startup information. You can change the selection to an optical drive or a USB flash drive.

To change the boot order:



IMPORTANT: For a tablet with a detachable keyboard, connect the keyboard to the keyboard dock before beginning these steps.

1. Insert the HP Recovery media.
2. Access the system **Startup** menu.

For computers or tablets with keyboards attached:

- ▲ Turn on or restart the computer or tablet, quickly press **esc**, and then press **f9** for boot options.

For tablets without keyboards:

- ▲ Turn on or restart the tablet, and then quickly hold down the volume up button; then select **f9**.

- or -

Turn on or restart the tablet, and then quickly hold down the volume down button; then select **f9**.

- or -

Turn on or restart the tablet, and then quickly hold down the Windows button; then select **f9**.

3. Select the optical drive or USB flash drive from which you want to boot.
4. Follow the on-screen instructions.

Removing the HP Recovery partition (select products only)

HP Recovery Manager software allows you to remove the HP Recovery partition to free up hard drive space.



IMPORTANT: After you remove the HP Recovery partition, you will not be able to perform System Recovery or create HP recovery media from the HP Recovery partition. So before you remove the Recovery partition, create HP Recovery media; see [Creating HP Recovery media \(select products only\) on page 48](#).



NOTE: The Remove Recovery Partition option is only available on products that support this function.

Follow these steps to remove the HP Recovery partition:

1. Type `recovery` in the taskbar search box, and then select **HP Recovery Manager**.
2. Select **Remove Recovery Partition**, and then follow the on-screen instructions.

9 Using HP PC Hardware Diagnostics (UEFI)

HP PC Hardware Diagnostics is a Unified Extensible Firmware Interface (UEFI) that allows you to run diagnostic tests to determine whether the computer hardware is functioning properly. The tool runs outside the operating system so that it can isolate hardware failures from issues that are caused by the operating system or other software components.

When HP PC Hardware Diagnostics (UEFI) detects a failure that requires hardware replacement, a 24-digit Failure ID code is generated. This ID code can then be provided to support to help determine how to correct the problem.

 **NOTE:** To start diagnostics on a convertible computer, your computer must be in notebook mode and you must use the keyboard attached.

To start HP PC Hardware Diagnostics (UEFI), follow these steps:

1. Turn on or restart the computer, and quickly press *esc*.
2. Press *f2*.

The BIOS searches three places for the diagnostic tools, in the following order:

- a. Connected USB drive

 **NOTE:** To download the HP PC Hardware Diagnostics (UEFI) tool to a USB drive, see [Downloading HP PC Hardware Diagnostics \(UEFI\) to a USB device on page 54](#).

- b. Hard drive
- c. BIOS

3. When the diagnostic tool opens, select the type of diagnostic test you want to run, and then follow the on-screen instructions.

 **NOTE:** If you need to stop a diagnostic test, press *esc*.

Downloading HP PC Hardware Diagnostics (UEFI) to a USB device

 **NOTE:** The HP PC Hardware Diagnostics (UEFI) download instructions are provided in English only, and you must use a Windows computer to download and create the HP UEFI support environment because only .exe files are offered.

There are two options to download HP PC Hardware Diagnostics to a USB device.

Download the latest UEFI version

1. Go to <http://www.hp.com/go/techcenter/pcdiags>. The HP PC Diagnostics home page is displayed.
2. In the HP PC Hardware Diagnostics section, select the **Download** link, and then select **Run**.

Download any version of UEFI for a specific product

1. Go to <http://www.hp.com/support>.
2. Select **Get software and drivers**.

3. Enter the product name or number.

– or –

Select **Identify now** to let HP automatically detect your product.

4. Select your computer, and then select your operating system.

5. In the **Diagnostic** section, follow the on-screen instructions to select and download the UEFI version you want.

10 Power cord set requirements

The wide-range input feature of the computer permits it to operate from any line voltage from 100 to 120 volts AC, or from 220 to 240 volts AC.

The 3-conductor power cord set included with the computer meets the requirements for use in the country or region where the equipment is purchased.

Power cord sets for use in other countries and regions must meet the requirements of the country or region where the computer is used.

Requirements for all countries

The following requirements are applicable to all countries and regions:

- The length of the power cord set must be at least 1.0 m (3.3 ft) and no more than 2.0 m (6.5 ft).
- All power cord sets must be approved by an acceptable accredited agency responsible for evaluation in the country or region where the power cord set will be used.
- The power cord sets must have a minimum current capacity of 10 amps and a nominal voltage rating of 125 or 250 V AC, as required by the power system of each country or region.
- The appliance coupler must meet the mechanical configuration of an EN 60 320/IEC 320 Standard Sheet C13 connector for mating with the appliance inlet on the back of the computer. Requirements for all countries 113

Requirements for specific countries and regions

Country/region	Accredited agency	Applicable note number
Australia	EANSW	1
Austria	OVE	1
Belgium	CEBC	1
Canada	CSA	2
Denmark	DEMKO	1
Finland	FIMKO	1
France	UTE	1
Germany	VDE	1
Italy	IMQ	1
Japan	METI	3
The Netherlands	KEMA	1
Norway	NEMKO	1
The People's Republic of China	COC	5

Country/region	Accredited agency	Applicable note number
South Korea	EK	4
Sweden	CEMKO	1
Switzerland	SEV	1
Taiwan	BSMI	4
The United Kingdom	BSI	1
The United States	UL	2

- 1.** The flexible cord must be Type H05VV-F, 3-conductor, 1.0-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
- 2.** The flexible cord must be Type SPT-3 or equivalent, No. 18 AWG, 3-conductor. The wall plug must be a two-pole grounding type with a NEMA 5-15P (15 A, 125 V) or NEMA 6-15P (15 A, 250 V) configuration.
- 3.** The appliance coupler, flexible cord, and wall plug must bear a “T” mark and registration number in accordance with the Japanese Dentori Law. The flexible cord must be Type VCT or VCTF, 3-conductor, 1.00-mm² conductor size. The wall plug must be a two-pole grounding type with a Japanese Industrial Standard C8303 (7 A, 125 V) configuration.
- 4.** The flexible cord must be Type RVV, 3-conductor, 0.75-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
- 5.** The flexible cord must be Type VCTF, 3-conductor, 0.75-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.

11 Recycling

When a non-rechargeable or rechargeable battery has reached the end of its useful life, do not dispose of the battery in general household waste. Follow the local laws and regulations in your area for battery disposal.

HP encourages customers to recycle used electronic hardware, HP original print cartridges, and rechargeable batteries. For more information about recycling programs, see the HP Web site at <http://www.hp.com/recycle>.

Index

A

- AC adapter and battery 5
- AC adapter, spare part number 17
- action keys 10
 - identifying 9
- airplane mode key 10
- antenna
 - removal 39
 - spare part number 16, 40
- Antenna Kit, spare part number 16, 40
- audio, product description 1
- audio-out (headphone)/audio-in (microphone) jack, identifying 4

B

- backups 48
- base enclosure, spare part number 14
- battery
 - removal 24
 - spare part number 14, 24
- battery cable
 - spare part number 14, 24
- BIOS
 - determining version 44
 - downloading an update 45
 - starting the Setup Utility 44
 - updating 44
- Bluetooth label 12
- boot order
 - changing 52
- bottom 12
- bottom cover
 - removal 23
 - spare part number 23
- buttons
 - left TouchPad 6
 - power 8
 - right TouchPad 6

C

- cables, service considerations 18
- camera
 - identifying 3

- camera light, identifying 3
- caps lock light, identifying 7
- chipset, product description 1
- components
 - display 3
 - front 5
 - left side 4
 - right side 5
 - top 6
- computer
 - major components 13
 - specifications 46
- connector, power 5
- connectors, service considerations 18

D

- display assembly
 - removal 35
 - spare part numbers 16
- display back cover, spare part number 16
- display bezel
 - removal 35
 - spare part number 16, 35
- Display Hinge Kit, spare part number 16, 38
- display panel
 - product description 1
 - removal 36
 - spare part number 16
- display panel cable
 - removal 38
 - spare part number 16, 39
- display specifications 47
- DVD±RW DL SuperMulti Drive, spare part number 17

E

- electrostatic discharge 19
- equipment guidelines 21
- esc key, identifying 9
- external card expansion, product description 1

F

- fn key, identifying 9

G

- graphics, product description 1
- grounding guidelines 19
- guidelines
 - equipment 21
 - grounding 19
 - packaging 20
 - transporting 20
 - workstation 20

H

- hard drive
 - product description 1
- HDMI port
 - identifying 4
- HDMI-to-VGA adapter, spare part number 17
- heat sink
 - removal 29
 - spare part number 14, 29
- hinge
 - removal 37
 - spare part number 16, 38
- HP PC Hardware Diagnostics (UEFI) using 54
- HP Recovery Manager
 - correcting boot problems 52
 - starting 51
- HP Recovery media
 - creating 48
 - recovery 51
- HP Recovery partition
 - recovery 51
 - removing 53

I

- internal microphones, identifying 3

J

- jacks
 - audio-out (headphone)/audio-in (microphone) 4

- K**
- keyboard/top cover
 - removal 43
 - spare part numbers 14, 43
- keys
 - action 9
 - airplane mode 10
 - esc 9
 - fn 9
 - Windows 9
- L**
- labels
 - Bluetooth 12
 - regulatory 12
 - serial number 11
 - service 11
 - wireless certification 12
 - WLAN 12
- lights
 - AC adapter and battery light 5
 - caps lock 7
 - mute 7
 - power 5
- M**
- memory card reader, identifying 4
- memory card, identifying 4
- memory module
 - removing 25
- memory, product description 1
- microphone
 - product description 1
- minimized image recovery 51
- minimized image, creating 50
- model name 1
- mute light, identifying 7
- O**
- operating system, product description 2
- optical drive
 - product description 1
 - spare part number 17
- original system recovery 50
- P**
- packaging guidelines 20
- plastic parts, service considerations 18
- ports
 - HDMI 4
 - product description 2
 - USB 2.0 4
 - USB 3.0 4
- power button board
 - removal 41
 - spare part number 14, 41
- power button board cable
 - spare part number 14, 41
- power button, identifying 8
- power connector cable
 - removal 42
 - spare part number 14, 42
- power connector, identifying 5
- power cord
 - set requirements 56
- power lights, identifying 5
- power requirements, product description 2
- processor, product description 1
- product description
 - audio 1
 - chipset 1
 - display panel 1
 - external card expansion 1
 - graphics 1
 - hard drive 1
 - memory 1
 - microphone 1
 - operating system 2
 - optical drive 1
 - ports 2
 - power requirements 2
 - processors 1
 - product name 1
 - security 2
 - serviceability 2
 - webcam 1
 - wireless 1
- product name 1
- product name and number, computer 11
- R**
- raw display panel
 - spare part number 37
- recover
 - options 50
- recovery
 - discs 49, 51
 - HP Recovery Manager 50
 - media 51
 - starting 51
 - supported discs 49
 - system 50
 - USB flash drive 51
 - using HP Recovery media 49
- recovery media
 - creating 48
 - creating using HP Recovery Manager 49
- recovery partition
 - removing 53
- regulatory information
 - regulatory label 12
 - wireless certification labels 12
- removal/replacement procedures 22
- RTC battery
 - removing 28
 - spare part number 14
- Rubber Kit
 - spare part number 15
 - spare part numbers 15
- Rubber Kit, spare part number 17
- S**
- Screw Kit, spare part number 17
- security cable slot, identifying 4
- security, product description 2
- serial number 11
- serial number, computer 11
- service considerations
 - cables 18
 - connectors 18
 - plastic parts 18
- service labels, locating 11
- serviceability, product description 2
- slots
 - memory card reader 4
 - security cable 4
- speakers
 - identifying 5
 - removal 31
 - spare part number 14, 31
- specifications
 - display 47
- supported discs, recovery 49

- system board
 - removal 32
 - spare part numbers 32
- system recovery 50
- system restore point
 - creating 49
- system restore point, creating 48

T

- tools required 18
- TouchPad
 - buttons 6
 - removal 34
 - spare part number 14, 34
- TouchPad cable
 - spare part number 14, 34
- TouchPad zone, identifying 6
- transporting guidelines 20
- traveling with the computer 12

U

- USB 2.0 port, identifying 4
- USB 3.0 port, identifying 4

W

- webcam
 - product description 1
- webcam/microphone module
 - removal 36
 - spare part number 16, 36
- Windows
 - system restore point 48, 49
- Windows key, identifying 9
- Windows tools
 - using 49
- wireless antenna
 - removal 39
 - spare part number 16, 40
- wireless certification label 12
- wireless, product description 1
- WLAN antennas, identifying 3
- WLAN device 12
- WLAN label 12
- WLAN module
 - removal 26
 - spare part numbers 14, 26
- workstation guidelines 20