





BLACKBIRD 002

GAMING SYSTEM


OPEN BOX

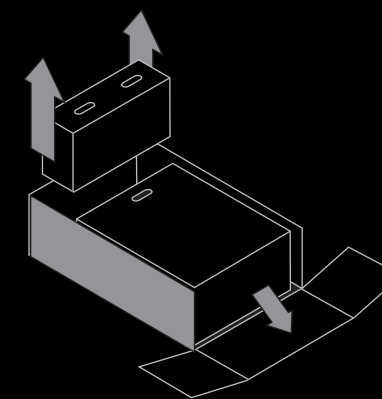


1 Flip down lower flap.
Remove accessory box.

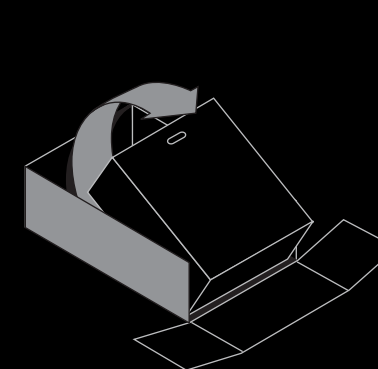

2 Rotate CPU box upright.

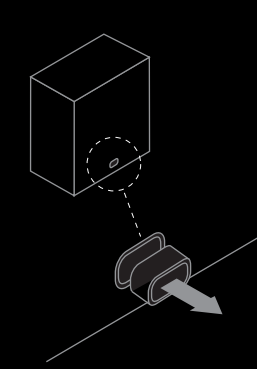

3 Pull out tab locks.

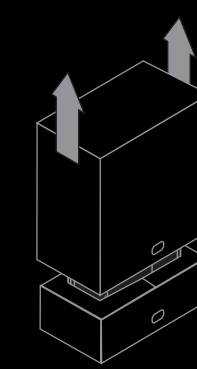


4 Remove top of box.


QUICK SETUP

Location, availability, and number of connectors may vary.

1 CONNECT PERIPHERALS

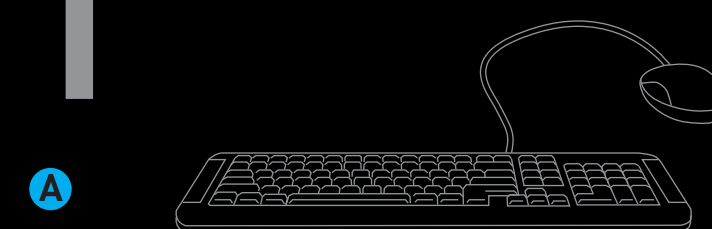


A

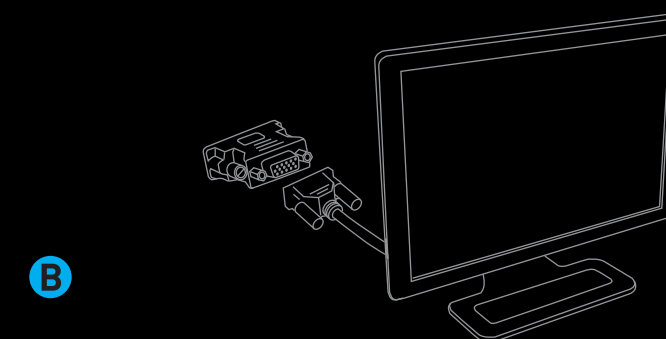

B

If your PC is configured for SLI mode, be sure to only plug monitor(s) into the DVI connectors located on the top graphics card.

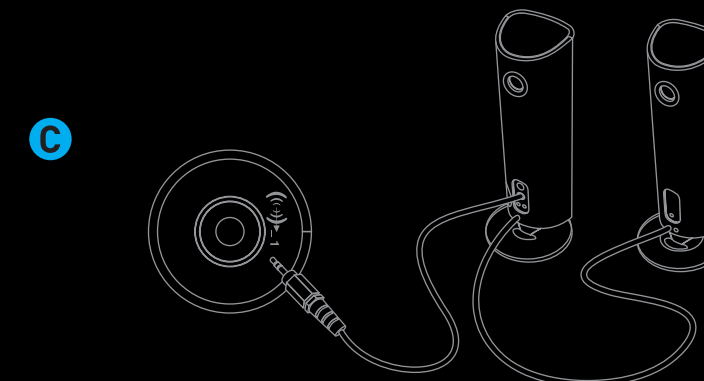


C

2 CONNECT TO THE INTERNET



D

3 CONNECT POWER

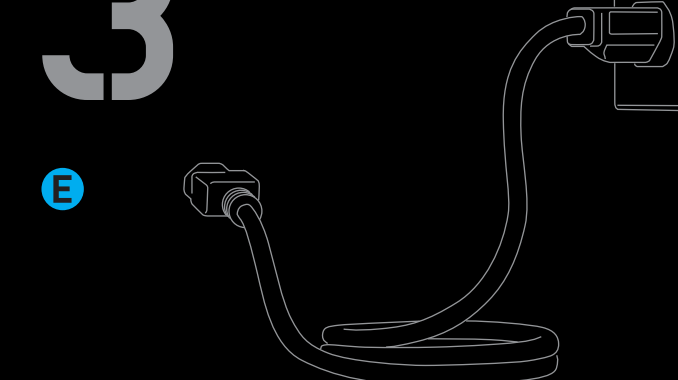

E




Press power switch on back of PC to "ON" position.
Leave switch in "ON" position.



For normal operation, press power button on front of PC.

STAND STABILIZER*

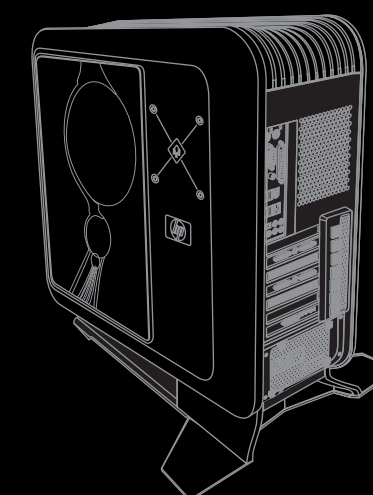

* Refer to the "Base Stabilization" addendum for installation instructions.

Copyright ©2007 Hewlett-Packard
Development Company, L.P.
Printed in XXXX

