

PRESARIO 400 FAMILY

System Boards	Assembly	Spare Part
486SX/25 w/modem & game port	003266-001	160614-001
486SX/25 w/game port & no modem	003266-004	160614-002*
	003266-014	
486SX/66 w/modem & game port	004463-001	189375-001**
486SX/66 w/game port	004463-002	189375-002*
486SX/33 w/modem & game port	003614-001	163628-001
486SX/33 w/game port & no modem	003614-002	163628-002 *

* Outside North America. ** Canada Only

Jumper Settings (Assembly 003266, 003614, 004463)

Jumper	Function	Pins *	Function
P1	Speed Select	1,2	Select processor speed (25 or 50 MHz)
		2,3	Select processor speed (33 or 66 MHz)
P2	Processor Upgrade Socket Select	1,2 PQFP *	Socket not used
		2,3 PGA *	Socket used
P3, P4	Processor Select	1,2	486SX (PQFP) **
			486DX **
P5			486DX2 **
			487SX ***
			Overdrive ***
			486SX (PGA)
			486SX (PQFP) **
P6	Clear CMOS and Password	1,2	486DX **
			486DX2 **
			487SX ***
P7	Modem ROM Select (if P7 is installed)	2,3	Overdrive ***
		3,4	486SX (PGA)
J16	Replacement Battery Connector		Remove and replace jumper P6 to clear CMOS.
			Internal Modem ROM
			External Modem ROM
			Use only 4.5v Alkaline computer battery.

* The 486SX (PQFP) is soldered to the board (no socket). All other type PGA processors plug into the processor socket.

** ODP.

*** ODP.

Memory SIMMs	Assembly	Spare Part
1 MB Memory Module	118666-004	141752-001
2 MB Memory Module	118667-004	141753-001
4 MB Memory Module	118665-004	141754-001
8 MB Memory Module	129041-002	141755-001

Microprocessors	Spare Part
486DX/33	194495-001
486DX2/50	163661-001
486DX2/66	194395-001

PRESARIO 400 FAMILY

Controller Boards	Assembly	Spare Part
6260 SCSI-2 Controller Board *	004004	146993-001
Serial/Parallel Interface *	000990	106886-001

* See Volume 2 Appendix, Multiproduct Boards, for settings.

Miscellaneous Internal	Spare Part
Backplane (2-slot)	160676-001
Monitor Kit (non-MPRII)* - 3200	160726-001
Monitor Kit ** - 3210	160726-005
Monitor Kit ** - 3220	160726-005
Monitor Kit *** - 3220	160726-004

* North America, Latin America, Asia-Pacific. Includes Power Supply.

** Europe. Includes Power Supply.

*** Australia/New Zealand (Sothern Hemisphere). Includes Power Supply.

Hard Drives

Size	Type	Inter-leave	Inte-grated	Min ROM	Spare Part
100 MB	32	1:1	Y	063093	160701-001
200 MB	51	1:1	Y	063093	160702-001
240 MB	1	1:1	Y	063093	129490-001
340 MB	63	1:1	Y	063093	171923-001

CD-ROM Drives	Spare Part
DualSpeed External Tray Load CD-ROM	199430-001
DualSpeed External CD-ROM	133882-001

Diskette Drives	Spare Part
1.44 MB Beach Gray	160788-201

Cables	Used With	Spare Part
Drive Power Cable	All Drives	160745-001
Drive Signal Cable	Hard Drive	160744-001
Drive Signal Cable	Diskette Drive	160743-001
LED Cable	Lights	160742-001

Processor/Coprocessor Locations

Processor (486SX/25)	Coprocessor (487SX-25)
U50	U50

System/Video ROM (486C1)


Revison	Number on ROM	Spare Part
	160730-007	160792-001

Battery	Spare Part
Battery, Alkaline 4.5 Volts, 600 mA	160274-001


PRESARIO 400 FAMILY

MEMORY UPGRADE CHART

PROCESSOR BOARD WITH 4 MB MEMORY
(P03265, 003514)

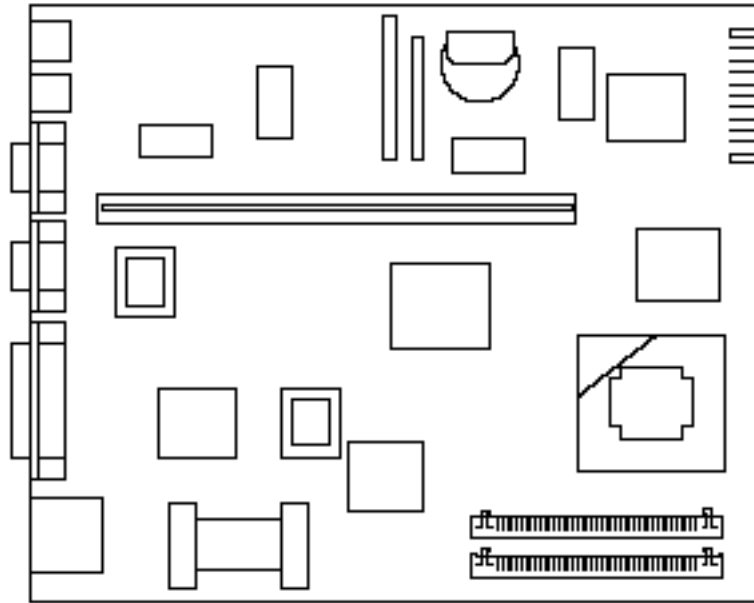

ADD THE FOLLOWING IN ANY
COMBINATION UP TO 20 MB

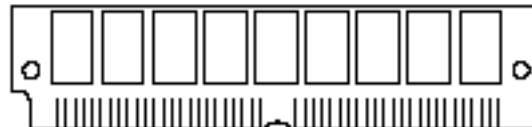

1-MB MEMORY MODULE
SPARE PN 141752-001

2-MB MEMORY MODULE
OPTION PN 141683-001

4-MB MEMORY MODULE
OPTION PN 141684-001 OR 153579-001

8-MB MEMORY MODULE
OPTION PN 141685-001 OR 153580-001