

HP Pavilion dv6 Notebook PC

Maintenance and Service Guide

© Copyright 2011 Hewlett-Packard Development Company, L.P.

AMD, the AMD Arrow logo, Athlon, Phenom, and Turion combinations thereof, are trademarks of Advanced Micro Devices, Inc. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. Intel and Core are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. SD Logo is a trademark of its proprietor.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

First Edition: March 2011

Document Part Number: 635489-001

Safety warning notice

WARNING! To reduce the possibility of heat-related injuries or of overheating the device, do not place the device directly on your lap or obstruct the device air vents. Use the device only on a hard, flat surface. Do not allow another hard surface, such as an adjoining optional printer, or a soft surface, such as pillows or rugs or clothing, to block airflow. Also, do not allow the AC adapter to contact the skin or a soft surface, such as pillows or rugs or clothing, during operation. The device and the AC adapter comply with the user-accessible surface temperature limits defined by the International Standard for Safety of Information Technology Equipment (IEC 60950).

Table of contents

1	Product description	. 1
2	External component identification	. 8
	Display	
	Buttons, speakers, and fingerprint reader (select models only)	9
	Keys	10
	Lights	11
	TouchPad	12
	Front	13
	Rear	13
	Left side	14
	Right side	15
	Bottom	16
3	Illustrated parts catalog	17
	Service tag	
	Computer major components	
	Cable Kit	
	Display assembly subcomponents	
	Mass storage devices	
	Miscellaneous parts	
	Sequential part number listing	32
4	Removal and replacement procedures	42
4	·	
	Preliminary replacement requirements	
	Tools required	
	Service considerations	
	Plastic parts	
	Cables and connectors	
	Drive handling	
	Grounding guidelines	44

	Electrostatic discharge damage	44
	Packaging and transporting guidelines	46
	Component replacement procedures	48
	Service tag	48
	Computer feet	49
	Battery	50
	Optical drive	
	Hard drive	54
	RTC battery	
	Memory module	
	WLAN module	58
	Keyboard	
	Top cover	
	Power button board	
	Fingerprint reader board	
	Bluetooth module	
	USB board	
	Power connector cable	
	System board	
	Fan/heat sink assembly	
	Processor	
	Speakers	
	Optical drive connector cable	
	Display assembly	94
5	Setup Utility (BIOS) and System Diagnostics	102
	Using Setup Utility	102
	Starting Setup Utility	102
	Changing the language of Setup Utility	102
	Navigating and selecting in Setup Utility	103
	Displaying system information	103
	Restoring factory settings in Setup Utility	104
	Exiting Setup Utility	104
	Updating the BIOS	104
	Determining the BIOS version	105
	Downloading a BIOS update	105
	Using System Diagnostics	106
6	Specifications	107
	Computer specifications	107
	15.6-inch display specifications	108

	Hard drive specifications	109
	Hard drive specifications (continued)	110
7	Backup and recovery	111
	Restore	111
	Creating restore media	112
	Performing a system restore	113
	Restoring using the dedicated recovery partition (select models only)	113
	Restoring using the restore media	114
	Changing the computer boot order	114
	Backing up and recovering your information	115
	Using Windows Backup and Restore	116
	Using Windows system restore points	116
	When to create restore points	
	Create a system restore point	117
	Restore to a previous date and time	117
8	Power cord set requirements	118
	Requirements for all countries	118
	Requirements for specific countries and regions	119
9	Recycling	120
	Battery	120
	Display	120
In	dex	126

1 Product description

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
Product Name	HP Pavilion dv6 Notebook PC	√	√
Processors	AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 35 W)	V	
	AMD Athlon II P360 2.30-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W)	V	
	AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W)	V	
	AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, quad core, 35 W)	V	
	AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W)	V	
	AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W)	V	
	AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, dual core, 35 W)	V	
	AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, quad core, 25 W)	V	
	AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 25 W)	V	
	AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, triple core, 25 W)	V	
	AMD Turion II P570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 35 W)	V	
	AMD Turion II P560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 25 W)	√	
	Intel Core i7-2820M 2.30-GHz (SC turbo up to 3.10-GHz) processor (8.0-MB L3 cache, quad core, 45 W)		V
	Intel Core i7-2720M 2.20-GHz (SC turbo up to 3.00-GHz) processor (6.0-MB L3 cache, quad core, 45 W)		V

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	Intel Core i7-2630M 2.00-GHz (SC turbo up to 2.90-GHz) processor (6.0-MB L3 cache, quad core, 45 W)		√
	Intel Core i7-2620M 2.70-GHz (SC turbo up to 3.40-GHz) processor (4.0-MB L3 cache, dual core, 35 W)		V
	Intel Core i5-2540M 2.60-GHz (SC turbo up to 3.30-GHz) processor (3.0-MB L3 cache, dual core, 35 W)		V
	Intel Core i5-2520M 2.50-GHz (SC turbo up to 3.20-GHz) processor (3.0-MB L3 cache, dual core, 35 W)		√
	Intel Core i5-2410M 2.30-GHz (SC turbo up to 2.90-GHz) processor (3.0-MB L3 cache, dual core, 35 W)		V
	Intel Core i3-2310M 2.10-GHz processor (3.0-MB L3 cache, dual core, 35 W)		V
Chipset	Northbridge: AMD RS880MD	√	
	Southbridge: AMD SB820M		
	Intel® HM65 Express chipset		V
Graphics	Internal graphics: ATi Mobility Radeon™ HD 4250 graphics supporting DX10.1	V	
	Switchable discrete graphics:		
	 ATi XT Radeon HD 6650M M2 package with 1024-MB of graphics subsystem discrete memory (64-MB × 16 DDR3 @ 900MHz × 8 PCs), 128- bit muxless 		
	 ATi XT Radeon HD 6470M M2 package with 512-MB of graphics subsystem discrete memory (64-MB × 16 DDR3 @ 900MHz × 4 PCs), 64- bit muxless 		
	Internal graphics: Intel HD Graphics 3000		V
	Switchable discrete graphics:		
	 ATI XT Radeon HD 6770M M2 package with 1024-MB of graphics subsystem discrete memory (32-MB × 32 GDDR5 × 8 PCs, 5GBPS), muxless, with reserve space for 2-GB graphics subsystem memory 		
	 ATi XT Radeon HD 6490M M2 package with 1024-MB of graphics subsystem discrete memory (64-MB × 32 GDDR5 × 4 PCs, 5GBPS), with a maximum of 1-GB of graphics subsystem memory, muxless 		
	Support DX11, HD decode, and HDMI	√	√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
Panel	15.6-in, high-definition (HD), light-emitting diode (LED), low-voltage differential signalling (LVDS), SVA BrightView (1366×768) display; typical brightness: 200 nits	٧	٧
	All display assemblies include 2 wireless local area network (WLAN) antenna cables		
	Supports 16:9 ultra wide aspect ratio		
	Lighted logo on top bezel		
Memory	2 customer-accessible/upgradable memory module slots	V	V
	Supports dual-channel memory	√	√
	Supports up to 8192 GB of system RAM	√	√
	DDR3/1333-MHz	√	V
	Supports the following configurations:	\checkmark	\checkmark
	• 8192-MB total system memory (4096×2)		
	• 6144-MB total system memory (4096×1 + 2048×1)		
	 4096-MB total system memory (4096×1 or 2048×2) 		
	 3072-MB total system memory (2048×1 + 1024×1) 		
	 2048-MB total system memory (2048×1 or 1024×2) 		
	 1024-MB total system memory (1024×1; not supported on computer models equipped with an AMD processor) 		
Hard drives	Supports 6.35-cm (2.5-in) hard drives in 12.7-mm (. 50-in), 9.5-mm (.37-in), and 7.0-mm (.28-in) thicknesses	V	V
	Customer-accessible	V	V
	Accelerometer / HDD protection support	√	V
	Serial ATA	√	√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	Supports the following configurations:	√	√
	• 1 TB, 5400 rpm (12.7 mm)		
	• 750 GB, 7200 and 5400 rpm (9.5 mm)		
	• 640 GB, 7200 and 5400 rpm (9.5 mm)		
	• 500 GB, 7200 and 5400 rpm (9.5 mm)		
	• 320 GB, 7200 (7.0 mm) and 5400 rpm (9.5 mm)		
	• 250 GB, 7200 rpm (7.0 mm)		
	Supports 160-GB solid-state drive		√
Optical drive	Fixed	√	√
	Serial ATA	√	√
	12.7-mm tray load	√	V
	Blu-ray ROM with LightScribe DVD ±R/RW Super Multi Double-Layer Drive	V	V
	Blu-ray Disc R/RW with SuperMulti Double-Layer Drive		√
	DVD±RW and CD-RW Super Multi Double-Layer Combo Drive with LightScribe	V	V
	Supports zero-power optical drive		√
Audio and video	Dual array digital microphones with appropriate beamforming, echo-cancellation, noise-suppression software	V	V
	HD audio	√	V
	HP-branded Altec/Lansing quad Beats Audio speakers	√	V
	HP TrueVision HD webcam	√	V
Ethernet	Integrated 10/100/1000 network interface card (NIC)	V	V
Wireless	Integrated wireless local area network (WLAN) options by way of wireless module	V	V
	Two WLAN antennas built into display assembly	√	√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	Support for the following WLAN formats:	√	V
	 Broadcom 4313 802.11b/g/n 1×1 WiFi and 2070 Bluetooth 2.1+EDR Combo adapter (BT3.0+HS ready) 		
	 Broadcom 4313 802.11b/g/n 1×1 WiFi Adapter 		
	 Ralink RT3090BC4 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (BT3.0+HS ready) 		
	 Ralink 5390GN 802.11b/g/n 1×1 WiFi Adapter 		
	Support for the following WLAN formats:	√	
	 Atheros 9285G 802.11b/g/n 1×1 WiFi Adapter 		
	 Atheros AR8002WB-1NGB 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (BT3.0+HS ready) 		
	 Realtek RTL8191SE 802.11b/g/n 1×1 WiFi Adapter 		
	 Realtek 8188BC8 802.11a/b/g/n 2×2 WiFi and Bluetooth 3.0+HS Combo Adapter 		
	Support for the following WLAN formats:		\checkmark
	Intel Centrino Advanced-N 6230		
	 Intel Centrino Wireless-N 1000 		
	• Intel Centrino Wireless-N + WiMAX 6150		
External media card	HP Multi-Format Digital Media Reader supports the following digital card formats:	٧	V
	Secure Digital (SD) Memory Card		
	 Secure Digital Extended Capacity (SDxC) Memory Card 		
	 Secure Digital High Capacity (SDHC) Memory Card 		
	Ultra High Speed MultiMediaCard (UHS/MMC)		

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
Ports	3-pin AC power	√	V
	Audio-in (mono microphone)		
	Audio-out (stereo headphone)		
	 HDMI version 1.4 supporting up to 1920 ×1200 @ 60Hz 		
	RJ-45 (Ethernet, includes link and activity lights)		
	• USB 2.0 (3 ports)		
	 VGA (Dsub 15 pin) supporting 2048×1536 external resolution @ 75 Hz, hot plug and unplug and auto-detection for correct output to wide- aspect vs. standard aspect video 		
Keyboard/ pointing devices	Full-size, textured, pocket, keyboard with numeric keypad	V	√
	TouchPad with multi-touch gestures, 2-finger scrolling, and pinch-zoom enabled	٨	√
	Dura-coat, island-style keyboard	√	√
	Multitouch gestures (2-finger scrolling and pinch-zoom) enabled by default	V	V
	Taps enabled by default	√	√
Power requirements	Support for the following 3-wire plug with ground pin AC adapters (supports 3-pin DC connector):	V	V
	 120W AC adapter with localized cable plug support 		
	 90W EM AC adapter with localized cable plug support 		
	 90W AC adapter with localized cable plug support 		
	 65W EM AC adapter with localized cable plug support 		
	 65W AC adapter with localized cable plug support 		
	Support for the following batteries:	V	\checkmark
	• 9cell, 100-Whr, 3.00-Ah Li-ion battery		
	• 6-cell, 62-Whr, 2.80-Ah Li-ion battery		
	• 6-cell, 55-Whr, 2.55-Ah Li-ion battery		
Security	Security cable slot	√	√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	Fingerprint reader with Digital Persona software support		V
	Supports Intel AT-p Ready		√
Operating	Preinstalled:	V	
system	• Windows 7 Home Basic		
	• Windows 7 Home Premium 64-bit		
	 Windows 7 Professional 64-bit 		
	Preinstalled:		√
	• Windows 7 Home Basic (64- and 32-bit)		
	• Windows 7 Home Premium (64- and 32-bit)		
	 Windows 7 Professional (64- and 32-bit) 		
	• Windows 7 Starter (32-bit)		
	 Windows 7 Ultimate (64-bit) 		
	• FreeDOS		
	 RedFlag 		
Serviceability	End-user replaceable parts:	V	√
	AC adapter		
	• Battery		
	Hard drive		
	Memory modules (2)		
	Optical drive		
	WLAN module		

2 External component identification

Display



ltem	Component	Description
(1)	WLAN antennas (2)*	Send and receive wireless signals to communicate with WLANs.
(2)	Internal microphones (2)	Record sound.
(3)	Webcam light	On: The webcam is in use.
(4)	Webcam	Records video and captures still photographs.
		To use the webcam, select Start > All Programs > CyberLink YouCam > CyberLink YouCam .


^{*}The antennas are not visible from the outside of the computer. For optimal transmission, keep the areas immediately around the antennas free from obstructions. To see wireless regulatory notices, refer to the section of the *Regulatory, Safety, and Environmental Notices* that applies to your country or region. These notices are located in Help and Support.

Buttons, speakers, and fingerprint reader (select models only)



ltem	Component	Description
(1)	Power button	 When the computer is off, press the button to turn on the computer.
		 When the computer is on, press the button briefly to initiate Sleep.
		 When the computer is in the Sleep state, press the button briefly to exit Sleep.
		 When the computer is in Hibernation, press the button briefly to exit Hibernation.
		If the computer has stopped responding and Windows shutdown procedures are ineffective, press and hold the power button for at least 5 seconds to turn off the computer.
		To learn more about your power settings, select Start > Control Panel > System and Security > Power Options , or refer to the <i>HP Notebook Reference Guide</i> .
(2)	Speakers (2)	Produce sound.
(3)	Web browser button	Opens the default Web browser.
(4)	Fingerprint reader (select models only)	Allows a fingerprint logon to Windows, instead of a password logon.


Keys

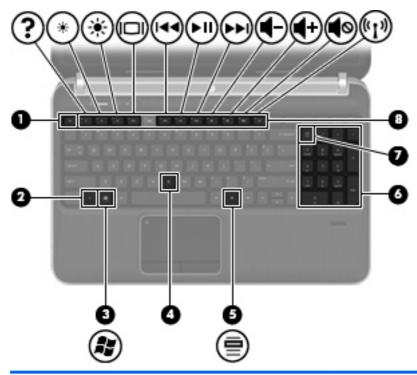

Item	Component	Description
(1)	esc key	Displays system information when pressed in combination with the fn key.
(2)	fn key	Executes frequently used system functions when pressed in combination with the num lk key, the b key, or the esc key.
(3)	Windows logo key	Displays the Windows Start menu.
(4)	b key	Increases or decreases the Beats Audio bass settings (select models only). Beats Audio is an enhanced audio profile that provides a deep, controlled bass while maintaining a clear sound. Beats Audio is enabled by default.
		You can also view and control the bass settings through the Windows operating system. To view and control the bass properties:
		 Select Start > All Programs > Beats Audio Control Panel > Listening Experience.
		– or –
		 Select Start > Control Panel > Hardware and Sound > Beats Audio Control Panel > Listening Experience.
(5)	Windows applications key	Displays a shortcut menu for items beneath the pointer.

ltem	Component	Description
(6)	Integrated numeric keypad	When the keypad has been enabled, the keys can be used like an external numeric keypad.
(7)	num lk key	Enables/disables the integrated numeric keypad when pressed in combination with the fn key.
(8)	Action keys	Execute frequently used system functions.


Lights

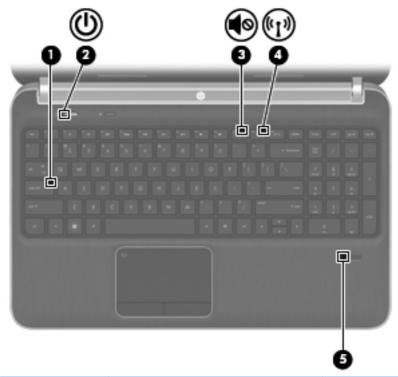

ltem	Component	Description
(1)	Caps lock light	On: Caps lock is on.
(2)	Power light	• White: the computer is on.
		 Blinking white: the computer is in the Sleep state.
		 Off: the computer is off or in Hibernation.
(3)	Mute light	Amber: Computer sound is off.
		 Off: Computer sound is on.

ltem	Component	Description
(4)	Wireless light	 White: An integrated wireless device, such as a WLAN device and/or a Bluetooth device, is on.
		Amber: All wireless devices are off.
(5)	Fingerprint reader light (select models only)	White: The fingerprint was read.
		Amber: The fingerprint was not read.

TouchPad

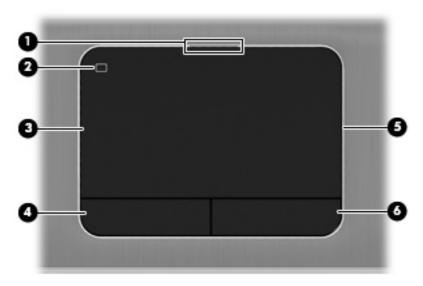

ltem	Component	Description
(1)	TouchPad off light	On: The TouchPad is off.
		Off: The TouchPad is on.
(2)	TouchPad on/off button	Turns the TouchPad on and off.
(3)	TouchPad zone	Moves the pointer and selects or activates items on the screen.
(4)	Left TouchPad button	Functions like the left button on an external mouse.
(5)	TouchPad on light	On: The TouchPad is on.
		Off: The TouchPad is off.
(6)	Right TouchPad button	Functions like the right button on an external mouse.

Front




ltem	Component	Description
(1)	Digital Media Slot	Supports the following digital card formats:
		Secure Digital (SD) Memory Card
		 Secure Digital Extended Capacity (SDxC) Memory Card
		Secure Digital High Capacity (SDHC) Memory Card
		Ultra High Speed MultiMediaCard (UHS/MMC)
(2)	Speakers (2) (select models only)	Produce sound.

Rear




Component	Description
Vent	Enables airflow to cool internal components.
	NOTE: the computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.

Left side

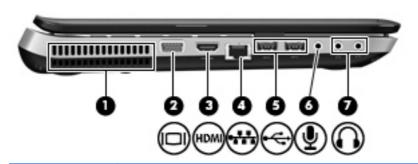


ltem	Component	Description
(1)	Vent	Enables airflow to cool internal components.
		NOTE: the computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.
(2)	External monitor port	Connects an external VGA monitor or projector.
(3)	HDMI port	Connects an optional video or audio device, such as a high-definition television, or any compatible digital or audio component.
(4)	RJ-45 (network) jack	Connects a network cable.
(5)	SuperSpeed USB ports (2)	Connect optional USB 3.0 devices (select models only) and provide enhanced USB power performance.
		NOTE: The SuperSpeed USB ports are also compatible with USB 1.0 and USB 2.0 devices.
(6)	Audio-in (microphone) jack	Connects an optional computer headset microphone, stereo array microphone, or monaural microphone.
(7)	Audio-out (headphone) jacks (2)	Produce sound when connected to optional powered stereo speakers, headphones, ear buds, a headset, or television audio.
		WARNING! To reduce the risk of personal injury, adjust the volume before putting on headphones, earbuds, or a headset. For additional safety information, refer to the Regulatory, Safety, and Environmental Notices.
		NOTE: When a device is connected to a headphone jack, the computer speakers are disabled.

Right side

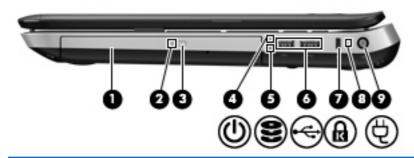

ltem	Component	Description
(1)	Optical drive	Reads and writes (select models only) to an optical disc.
(2)	Optical drive light	Green: The optical drive is being accessed.
		Off: The optical drive is off.
(3)	Optical drive eject button	Ejects the optical drive.
(4)	Power light	• White: the computer is on.
		Blinking white: the computer is in the Sleep state.
		Off: the computer is off or in Hibernation.
(5)	Drive light	Blinking white: The hard drive is being accessed.
		 Amber: HP ProtectSmart Hard Drive Protection has temporarily parked the hard drive.
		NOTE: For information on HP ProtectSmart Hard Drive Protection, refer to the <i>HP Notebook Reference Guide</i> .
(6)	USB ports (2)	Connect optional USB devices.
(7)	Security cable slot	Attaches an optional security cable to the computer.
		NOTE: The security cable is designed to act as a deterrent, but it may not prevent the computer from being mishandled or stolen.
(8)	Battery light	 White: the computer is connected to external power and the battery is fully charged.
		Amber: A battery is charging.
		 Blinking amber: The battery has reached a low battery level, or there is a battery error. When a battery reaches a critical battery level, the battery light begins blinking rapidly.
(9)	Power connector	Connects an AC adapter.

Bottom

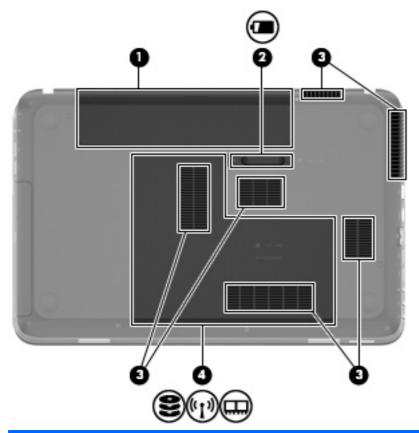


ltem	Component	Description
(1)	Battery bay	Holds the battery.
(2)	Battery release latch	Releases the battery from the battery bay.
(3)	Vents (6)	Enable airflow to cool internal components.
		NOTE: the computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.
(4)	Hard drive bay	Contains the hard drive, the WLAN device, and the memory module slots.
		CAUTION: To prevent an unresponsive system, replace the wireless module only with a wireless module authorized for use in the computer by the governmental agency that regulates wireless devices in your country or region. If you replace the module and then receive a warning message, remove the module to restore computer functionality, and then contact technical support through Help and Support.

3 Illustrated parts catalog

Service tag


When ordering parts or requesting information, provide the computer serial number and model number provided on the service tag.

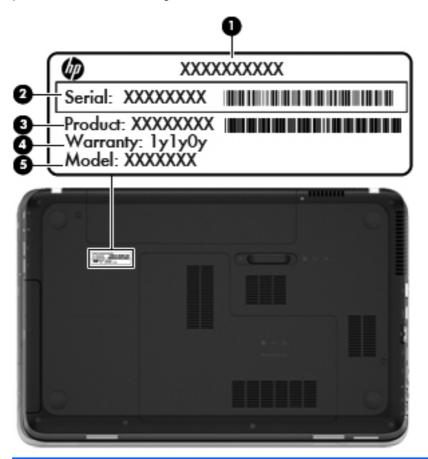

ltem	Component	Description
(1)	Product name	This is the product name affixed to the front of the computer.
(2)	Serial number (s/n)	This is an alphanumeric identifier that is unique to each product.

ltem	Component	Description
(3)	Part number/Product number (p/n)	This number provides specific information about the product's hardware components. The part number helps a service technician determine what components and parts are needed.
(4)	Warranty period	This number describes the duration of the warranty period for the computer.
(5)	Model description	This is the alphanumeric identifier used to locate documents, drivers, and support for the computer.

Computer major components

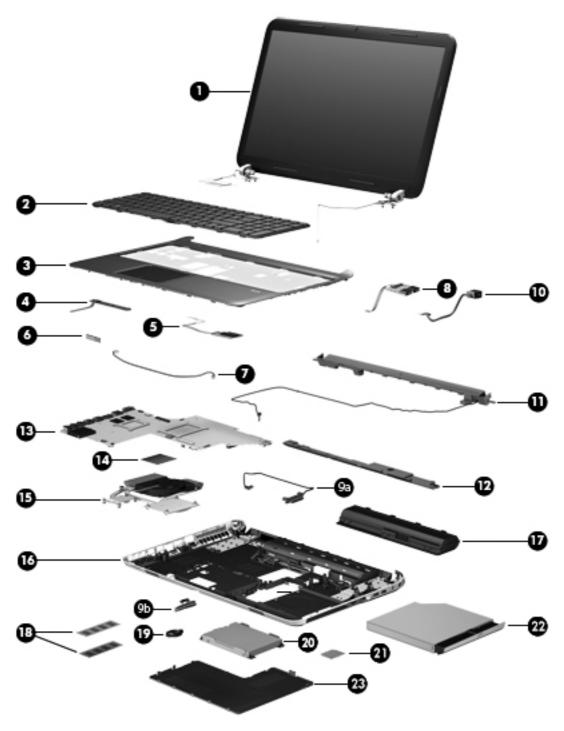

ltem	Component	Spare part number
(1)	15.6-in, high definition (HD), light-emitting diode (LED), BrightView display assembly (inclusebcam, two microphones, and wireless antenna transceivers and cables)	
	In butter gold finish	641482-001

ltem	Component	Spare part number
	In dark umber finish	640431-001
	In espresso black finish	640430-001
	In linen white finish	640433-001
	In Pacific blue finish	641479-001
	In pearl pink finish	641481-001
	In ruby red finish	640434-001
	In Sonoma red finish	641480-001
	In steel gray finish	650798-001
	NOTE: For more display assembly spare part information, see <u>Display assembly sub</u>	components on page 28.
(2)	Keyboard (includes keyboard cable):	
	Keyboard in black finish:	
	For use only with computer models equipped with an AMD processor in Brazil	640436-201
	For use only with computer models equipped with an Intel processor in Israel	640436-BB1
	For use only with computer models equipped with an Intel processor in Japan	640436-291
	For use only with computer models equipped with an Intel processor in South Korea	640436-AD1
	For use only with computer models equipped with an Intel processor in Taiwan	640436-AB1
	For use only with computer models equipped with an Intel processor in Thailand	640436-281
	For use with all computer models:	
	For use in Belgium	640436-A41
	For use in Canada	640436-121
	For use in the Czech Republic and Slovakia	640436-221
	For use in Denmark, Finland, and Norway	640436-DH1
	For use in France	640436-051
	For use in Germany	640436-041
	For use in Greece	640436-DJ1
	For use in Hungary	640436-211
	For use in Italy	640436-061
	For use in Latin America	640436-161
	For use in the Netherlands	640436-B31
	For use in Portugal	640436-131
	For use in Russia	640436-251
	For use in Saudi Arabia	640436-171

tem	Component	Spare part number
	For use in Slovenia	640436-BA1
	For use in Spain	640436-071
	For use in Switzerland	640436-BG1
	For use in Turkey	640436-141
	For use in the United Kingdom	640436-031
	For use in the United States	640436-001
	Keyboard in silver finish:	
	For use only with computer models equipped with an AMD processor in Brazil	644363-201
	For use only with computer models equipped with an Intel processor in Israel	644363-BB1
	For use only with computer models equipped with an Intel processor in Japan	644363-291
	For use only with computer models equipped with an Intel processor in South Korea	644363-AD1
	For use only with computer models equipped with an Intel processor in Taiwan	644363-AB1
	For use only with computer models equipped with an Intel processor in Thailand	644363-281
	For use with all computer models:	
	For use in Belgium	644363-A41
	For use in Canada	644363-121
	For use in the Czech Republic and Slovakia	644363-221
	For use in Denmark, Finland, and Norway	644363-DH1
	For use in France	644363-051
	For use in Germany	644363-041
	For use in Greece	644363-DJ1
	For use in Hungary	644363-211
	For use in Italy	644363-061
	For use in Latin America	644363-161
	For use in the Netherlands	644363-B31
	For use in Portugal	644363-131
	For use in Russia	644363-251
	For use in Saudi Arabia	644363-171
	For use in Slovenia	644363-BA1
	For use in Spain	644363-071
	For use in Switzerland	644363-BG1
	For use in Turkey	644363-141

ltem	Component	Spare part number
	For use in the United Kingdom	644363-031
	For use in the United States	644363-001
(3)	Top cover (includes TouchPad and TouchPad button board, but does not include Toubutton board cable):	uchPad cable or TouchPad
	NOTE: The TouchPad cable and TouchPad button board cable are included in the C 640422-001.	Cable Kit, spare part numbe
	In butter gold finish	641497-001
	In dark umber finish	640463-001
	In espresso black finish	640458-001
	In linen white finish	640460-001
	In Pacific blue finish	641494-001
	In pearl pink finish	641496-001
	In ruby red finish	640461-001
	In Sonoma red finish	641495-001
	In steel gray finish	650802-001
(4)	Power button board (does not include cable)	640439-001
	NOTE: The power button board cable is not included in the power button board spare part kit. The power button board cable is included in the Cable Kit, spare part number 640422-001.	
(5)	Fingerprint reader board (select models only, includes bracket, but does not include cable)	640427-001
	NOTE: The fingerprint reader board cable is not included in the fingerprint reader board spare part kit. The fingerprint reader board cable is included in the Cable Kit, spare part number 640422-001.	
(6)	Bluetooth module (for use only with computer models equipped with an Intel processor)	537921-001
	NOTE: The Bluetooth module spare part kit does not include the Bluetooth module cable. The Bluetooth module cable is available in the Cable Kit, spare part number 641478-001.	
(7)	Bluetooth module cable (for use only with computer models equipped with an Intel processor)	641478-001
(8)	USB board (does not include cable)	640441-001
	NOTE: The USB board cable is not included in the USB board spare part kit. The USB board cable is included in the Cable Kit, spare part number 640422-001.	
	Cable Kit, includes:	640422-001
(9a)	Optical drive connector cable	
(9b)	Hard drive connector cable	

ltem	Component	Spare part number
	Not illustrated:	
	Power button board cable	
	Fingerprint reader board cable	
	TouchPad cable	
	TouchPad button board cable	
	USB board cable	
	NOTE: See <u>Cable Kit on page 27</u> for more Cable Kit spare part information.	
(10)	Power connector cable	640424-001
(11)	Speaker cover:	
	For use only with computer models in dark umber and steel gray finish	641438-001
	For use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish	640443-001
(12)	Speaker Kit (includes left and right speakers and cable)	640449-001
(13)	System board (includes replacement thermal material):	
	For use only with computer models equipped with an AMD processor:	
	Equipped with the RS880MD chipset, HD6650 graphics subsystem chipset, 1024-MB of graphics subsystem discrete memory, and USB version 3.0	640454-001
	Equipped with the RS880MD chipset, HD6650 graphics subsystem chipset, 1024-MB of graphics subsystem discrete memory, and USB version 2.0	640452-001
	Equipped with the RS880MD chipset, HD6470 graphics subsystem chipset, 512-MB of graphics subsystem discrete memory, and USB version 3.0	640453-001
	Equipped with the RS880MD chipset, HD6470 graphics subsystem chipset, 512-MB of graphics subsystem discrete memory, and USB version 2.0	640451-001
	Equipped with the RS880M chipset, a graphics subsystem with UMA memory, and USB version 3.0	640455-001
	Equipped with the RS880M chipset, a graphics subsystem with UMA memory, and USB version 2.0	640450-001
	For use only with computer models equipped with an Intel processor:	
	For use only with computer models equipped with a quad core processor, the Intel HD6770 graphics subsystem, and 2048-MB of discrete memory	650799-001
	For use only with computer models equipped with a dual core processor, the Intel HD6770 graphics subsystem, and 2048-MB of discrete memory	650800-001
	For use only with computer models equipped with a quad core processor, the Intel HD6770 graphics subsystem, and 1024-MB of discrete memory	641488-001
	For use only with computer models equipped with a dual core processor, the Intel HD6770 graphics subsystem, and 1024-MB of discrete memory	641489-001


ltem	Component	Spare part number
	For use only with computer models equipped with a quad core processor, the Intel HD6490 graphics subsystem, and 1024-MB of discrete memory	641486-001
	For use only with computer models equipped with a dual core processor, the Intel HD6490 graphics subsystem, 1024-MB of discrete memory, and USB version 3.0	641484-001
	For use only with computer models equipped with a dual core processor, the Intel HD6490 graphics subsystem, 1024-MB of discrete memory, and USB version 2.0	641487-001
	For use only with computer models equipped with a quad core processor, a graphics subsystem with UMA memory, and USB version 3.0	641491-001
	For use only with computer models equipped with a dual core processor, a graphics subsystem with UMA memory, and USB version 3.0	641485-001
	For use only with computer models equipped with a dual core processor, a graphics subsystem with UMA memory, and USB version 2.0	641490-001
	Thermal Material Kit (not illustrated, includes replacement thermal paste and pads)	
	For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	640457-001
	For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	640456-001
	For use only with computer models equipped with an Intel processor and a graphics subsystem with 2048-MB of discrete memory	650801-001
	For use only with computer models equipped with an Intel processor and a graphics subsystem with 1024-MB of discrete memory	641493-001
	For use only with computer models equipped with an Intel processor and a graphics subsystem with UMA memory	641492-001
(14)	Processor (includes replacement thermal material)	
	AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 35 W)	634686-001
	AMD Athlon II P360 2.30-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W)	636635-001
	AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W)	616343-001
	AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, quad core, 35 W)	635496-001
	AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W)	635495-001
	AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W)	616345-001
	AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, dual core, 35 W)	635494-001
	AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, quad core, 25 W)	634689-001

ltem	Component	Spare part number
	AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 25 W)	634688-001
	AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, triple core, 25 W)	634687-001
	AMD Turion II P570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 35 W)	634690-001
	AMD Turion II P560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 25 W)	634691-001
	Intel Core i7-2820M 2.30-GHz (SC turbo up to 3.10-GHz) processor (8.0-MB L3 cache, quad core, 45 W)	634694-001
	Intel Core i7-2720M 2.20-GHz (SC turbo up to 3.00-GHz) processor (6.0-MB L3 cache, quad core, 45 W)	631254-001
	Intel Core i7-2630M 2.00-GHz (SC turbo up to 2.90-GHz) processor (6.0-MB L3 cache, quad core, 45 W)	635501-001
	Intel Core i7-2620M 2.70-GHz (SC turbo up to 3.40-GHz) processor (4.0-MB L3 cache, dual core, 35 W)	631252-001
	Intel Core i5-2540M 2.60-GHz (SC turbo up to 3.30-GHz) processor (3.0-MB L3 cache, dual core, 35 W)	631255-001
	Intel Core i5-2520M 2.50-GHz (SC turbo up to 3.20-GHz) processor (3.0-MB L3 cache, dual core, 35 W)	631253-001
	Intel Core i5-2410M 2.30-GHz (SC turbo up to 2.90-GHz) processor (3.0-MB L3 cache, dual core, 35 W)	638039-001
	Intel Core i3-2310M 2.10-GHz processor (3.0-MB L3 cache, dual core, 35 W)	638037-001
(15)	Fan/heat sink assembly (includes replacement thermal material):	
	For use only with computer models equipped with an AMD processor:	
	For use only with computer models equipped with a graphics subsystem with discrete memory	640426-001
	For use only with computer models equipped with a graphics subsystem with UMA memory	640425-001
	For use only with computer models equipped with an Intel processor:	
	For use only with computer models equipped with a graphics subsystem with 2048-MB discrete memory	650797-001
	For use only with computer models equipped with a graphics subsystem with 1024-MB discrete memory	641477-001
	For use only with computer models equipped with a graphics subsystem with UMA memory	641476-001
(16)	Base enclosure (includes battery release latch and 4 rubber feet)	
	For use only with computer models in dark umber and steel gray finish	640419-001
	For use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish	640418-001

ltem	Component	Spare part number
(17)	Battery:	
	9-cell, 100-Whr, 3.00-Ah Li-ion battery	636631-001
	6-cell, 62-Whr, 2.80-Ah Li-ion battery	593562-001
	6-cell, 55-Whr, 2.55-Ah Li-ion battery	593554-001
(18)	Memory modules (2, DDR3, 10600, 1333-MHz):	
	4 GB	621569-001
	2 GB	621565-001
	1 GB	639736-001
(19)	RTC battery	608771-001
(20)	Hard drive (2.5-in, SATA, does not include hard drive bracket, hard drive connector of	cable, or screws):
	1-TB, 5400-rpm, 12.7 mm	638974-001
	750-GB, 7200-rpm, 9.5 mm	633252-001
	750-GB, 5400-rpm, 9.5 mm	634250-001
	640-GB, 7200-rpm, 9.5 mm	621046-001
	500-GB, 7200-rpm, 9.5 mm	608218-001
	320-GB, 7200-rpm, 7.0 mm	641672-001 and 634862-001
	250-GB, 7200-rpm, 7.0 mm	635225-001 and 634861-001
	160-GB solid-state drive (not illustrated, for use only with computer models equipped with an Intel processor)	641825-001
	Hard Drive Hardware Kit (not illustrated, includes hard drive bracket and screws)	640428-001
(21)	WLAN module:	
	For use on all computer models:	
	Broadcom 4313 802.11b/g/n 1×1 WiFi and 2070 Bluetooth 2.1+EDR Combo adapter (BT3.0+HS ready)	600370-001
	Broadcom 4313 802.11b/g/n 1×1 WiFi Adapter	593836-001
	Ralink RT3090BC4 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (BT3.0+HS ready)	630705-001
	Ralink 5390GN 802.11b/g/n 1×1 WiFi Adapter	630703-001
	For use only with computer models equipped with an AMD processor:	
	Atheros 9285G 802.11b/g/n 1×1 WiFi Adapter	605560-005
	Atheros AR8002WB-1NGB 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (BT3.0+HS ready)	593127-001
	Realtek RTL8191SE 802.11b/g/n 1×1 WiFi Adapter	640926-001


ltem	Component	Spare part number
	Realtek 8188BC8 802.11a/b/g/n 2×2 WiFi and Bluetooth 3.0+HS Combo Adapter	602993-001
	For use only with computer models equipped with an Intel processor:	
	Intel Centrino Advanced-N 6230	631956-001
	Intel Centrino Wireless-N 1000	593530-001
	Intel Centrino Wireless-N + WiMAX 6150	633817-001
(22)	Optical drive (includes bezel and bracket):	
	Blu-ray ROM with LightScribe DVD \pm R/RW Super Multi Double-Layer Drive for use only with computer models equipped with an Intel processor	641824-001
	DVD±RW and CD-RW Super Multi Double-Layer Combo Drive with LightScribe	641809-001
(23)	Service cover — available in the Plastics Kit, spare part number 640444-001	

Cable Kit

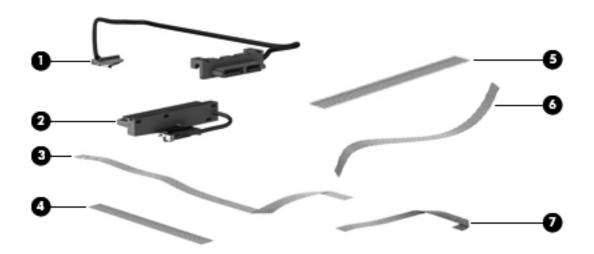

ltem	Component	Spare part number
	Cable Kit, includes:	640422-001
(1)	Optical drive connector cable	
(2)	Hard drive connector cable	
(3)	Fingerprint reader board cable	
(4)	USB board cable	
(5)	TouchPad cable	
(6)	TouchPad button board cable	
(7)	Power button board cable	


Display assembly subcomponents

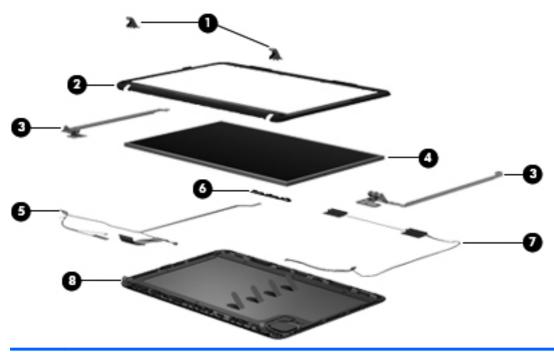

ltem	Component	Spare part number
(1)	Display hinge covers (2)	641807-001
(2)	Display bezel:	
	For use only with computer models in dark umber and steel gray finish	640421-001
	For use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish	640420-001
(3)	Display Hinge Kit (includes left and right display hinges and brackets)	640429-001
(4)	15.6-in, HD, LED, BrightView display panel	640445-001
(5)	Display Cable Kit (includes display panel cable and webcam/microphone module cable)	
	For use only with computer models in dark umber and steel gray finish	644362-001
	For use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish	640423-001
(6)	Webcam/microphone module	639387-001
(7)	Antenna Kit (includes left and right wireless antenna cables and transceivers)	640411-001
(8)	Display enclosure:	
	In butter gold finish	641475-001
	In dark umber finish	640417-001
	In espresso black finish	640412-001
	In linen white finish	640414-001

ltem	Component	Spare part number
	In Pacific blue finish	641472-001
	In pearl pink finish	641474-001
	In ruby red finish	640415-001
	In Sonoma red finish	641473-001
	In steel gray finish	650796-001
	Display Rubber Kit (not illustrated)	641810-001
	Display Screw Kit (not illustrated)	640448-001

Mass storage devices

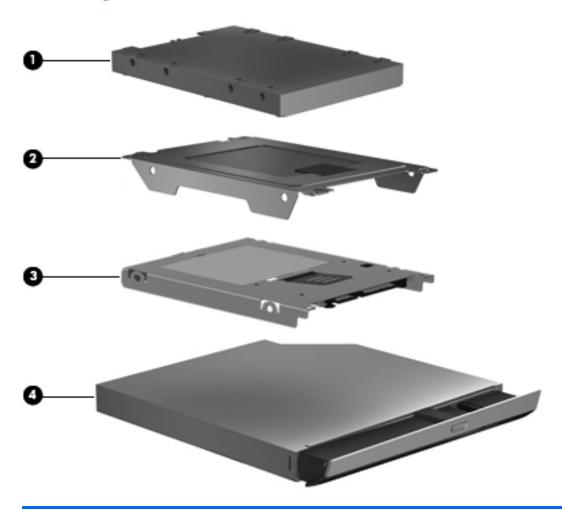

ltem	Component	Spare part number
(1)	Hard drive (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws):	
	1-TB, 5400-rpm, 12.7 mm	638974-001
	750-GB, 7200-rpm, 9.5 mm	633252-001
	750-GB, 5400-rpm, 9.5 mm	634250-001
	640-GB, 7200-rpm, 9.5 mm	621046-001
	500-GB, 7200-rpm, 9.5 mm	608218-001
	320-GB, 7200-rpm, 7.0 mm	641672-001 and 634862-001
	250-GB, 7200-rpm, 7.0 mm	635225-001 and 634861-001
	Hard Drive Hardware Kit, includes:	640428-001
(2)	Hard drive bracket	

ltem	Component	Spare part number	
	Hard drive screws (not illustrated)		
(3)	160-GB solid-state drive (for use only with computer models equipped with an Intel processor)	641825-001	
(4)	Optical drive (includes bezel and bracket):		
	Blu-ray ROM with LightScribe DVD \pm R/RW Super Multi Double-Layer Drive for use only with computer models equipped with an Intel processor	641824-001	
	DVD±RW and CD-RW Super Multi Double-Layer Combo Drive with LightScribe	641809-001	

Miscellaneous parts

Component	Spare part number
HP Smart AC adapter:	
For use with all computer models:	
120-W PFC RC V HP Smart AC adapter	609941-001
90-W PFC RC V HP Smart AC adapter	609940-001
65-W RC V HP Smart AC adapter	609939-001
For use only with computer models equipped with an Intel processor:	
90-W PFC RC V EM HP Smart AC adapter	609947-001
65-W RC V EM HP Smart AC adapter	609948-001
Power cord (3-pin, black, 1.83-m):	
For use with all computer models:	
For use in Argentina	490371-D01
For use in Denmark	490371-081
For use in Europe	490371-021
For use in Italy	490371-061
For use in North America	490371-001
For use in South Africa	490371-AR1
For use in Switzerland	490371-111
For use in the United Kingdom and Singapore	490371-031
For use only with computer models equipped with AMD processors in Brazil	490371-202
or use only with computer models equipped with Intel processors:	
or use in Australia	490371-111
For use in India	490371-D61

Component	Spare part number
For use in Israel	490371-BB1
For use in Japan	490371-291
For use in the People's Republic of China	490371-AA1
For use in South Korea	490371-AD1
For use in Taiwan	490371-AB1
For use in Thailand	490371-281
Remote control (full-function, with teletext)	465541-004
USB DVD-T antenna	581223-001
USB DVB-T TV tuner	581222-001
Screw Kit	640447-001

Sequential part number listing

Spare part number	Description
465541-004	Remote control (full-function, with teletext)
490371-001	Power cord for use with all computer models in North America (3-pin, black, 1.83-m)
490371-011	Power cord for use only with computer models equipped with an Intel processor in Australia (3-pin, black, 1.83-m)
490371-021	Power cord for use with all computer models in Europe (3-pin, black, 1.83-m)
490371-031	Power cord for use with all computer models in the United Kingdom and Singapore (3-pin, black, 1.83-m)
490371-061	Power cord for use with all computer models in Italy (3-pin, black, 1.83-m)
490371-081	Power cord for use with all computer models in Denmark (3-pin, black, 1.83-m)
490371-111	Power cord for use with all computer models in Switzerland (3-pin, black, 1.83-m)
490371-201	Power cord for use only with computer models equipped with an Intel processor in Thailand (3-pin, black, 1.83-m)
490371-202	Power cord for use only with computer models equipped with an AMD processor in Brazil (3-pin, black, 1.83-m)
490371-291	Power cord for use only with computer models equipped with an Intel processor in Japan (3-pin, black, 1.83-m)
490371-AA1	Power cord for use only with computer models equipped with an Intel processor in the People's Republic of China (3-pin, black, 1.83-m)
490371-AB1	Power cord for use only with computer models equipped with an Intel processor in Taiwan (3-pin, black, 1.83-m)
490371-AD1	Power cord for use only with computer models equipped with an Intel processor in South Korea (3-pin, black, 1.83-m)

Spare part number	Description	
490371-AR1	Power cord for use with all computer models in South Africa (3-pin, black, 1.83-m)	
490371-BB1	Power cord for use only with computer models equipped with an Intel processor in Israel (3-pin, black, 1.83-m)	
490371-D01	Power cord for use with all computer models in Argentina (3-pin, black, 1.83-m)	
490371-D61	Power cord for use only with computer models equipped with an Intel processor in India (3-pin, black, 1.83-m)	
537921-001	Bluetooth module (for use only with computer models equipped with an Intel processor)	
	NOTE: The Bluetooth module spare part kit does not include a Bluetooth module cable. The Bluetooth module cable is included in the Cable Kit, spare part number 640206-001.	
581222-001	USB DVB-T TV tuner	
581223-001	USB DVD-T antenna	
593127-001	Atheros AR8002WB-1NGB 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (BT3.0+HS ready) for use only with computer models equipped with an AMD processor	
593530-001	Intel Centrino Wireless-N 1000 WLAN module for use only on computer models equipped with an Intel processor	
593554-001	6-cell, 55-Whr, 2.55-Ah Li-ion battery	
593562-001	6-cell, 62-Whr, 2.80-Ah Li-ion battery	
593836-001	Broadcom 4313 802.11b/g/n 1×1 WiFi Adapter for use with all computer models	
600370-001	Broadcom 4313 802.11b/g/n 1×1 WiFi and 2070 Bluetooth 2.1+EDR Combo Adapter (Bluetooth 3.0+HS ready) for use with all computer models	
602993-001	Realtek 8188BC8 802.11a/b/g/n 2×2 WiFi and Bluetooth 3.0+HS Combo Adapter for use only with computer models equipped with an AMD processor	
605560-005	Atheros 9285G 802.11b/g/n 1×1 WiFi Adapter for use only with computer models equipped with an AMD processor	
608218-001	500-GB, 7200-rpm, 9.5 mm hard drive for use with all computer models (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)	
508771-001	RTC battery (includes cable and double-sided tape)	
609939-001	65-W RC V HP Smart AC adapter for use with all computer models	
609940-001	90-W PFC RC V HP Smart AC adapter for use with all computer models	
609941-001	120-W PFC RC V HP Smart AC adapter for use with all computer models	
609947-001	90-W PFC RC V EM HP Smart AC adapter for use only with computer models equipped with an Intel processor	
609948-001	65-W PFC RC V EM HP Smart AC adapter for use only with computer models equipped with an Intel processor	
616343-001	AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W; includes replacement thermal material)	
616345-001	AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W; includes replacement thermal material)	

Spare part number	Description
621046-001	640-GB, 7200-rpm, 9.5 mm hard drive for use with all computer models (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)
621565-001	2-GB memory module (DDR3, 10600, 1333-MHz)
621569-001	4-GB memory module (DDR3, 10600, 1333-MHz)
630703-001	Ralink 5390GN 802.11b/g/n 1×1 WiFi Adapter for use with all computer models
630705-001	Ralink RT3090BC4 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (Bluetooth 3.0+HS ready) for use with all computer models
631252-001	Intel Core i7-2620M 2.70-GHz (SC turbo up to 3.40-GHz) processor (4-MB L3 cache, dual core 35 W; includes replacement thermal material)
631253-001	Intel Core i5-2520M 2.50-GHz (SC turbo up to 3.20-GHz) processor (3.0-MB L3 cache, dual core, 35 W; includes replacement thermal material)
631254-001	Intel Core i7-2720M 2.20-GHz (SC turbo up to 3.00-GHz) processor (6.0-MB L3 cache, quad core, 45 W; includes replacement thermal material)
631255-001	Intel Core i5-2540M 2.60-GHz (SC turbo up to 3.30-GHz) processor (3.0-MB L3 cache, dual core, 35 W; includes replacement thermal material)
631956-001	Intel Centrino Advanced-N 6230 WLAN module for use only on computer models equipped with an Intel processor
633252-001	750-GB, 7200-rpm, 9.5 mm hard drive for use with all computer models (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)
633817-001	Intel Centrino Wireless-N + WiMAX 6150 WLAN module for use only with computer models equipped with an Intel processor
634250-001	750-GB, 5400-rpm, 9.5 mm hard drive for use with all computer models (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)
634686-001	AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core 35 W; includes replacement thermal material)
634687-001	AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, triple core, 25 W; includes replacement thermal material)
634688-001	AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 25 W; includes replacement thermal material)
634689-001	AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, quad core, 25 W; includes replacement thermal material)
634690-001	AMD Turion II P570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 35 W; includes replacement thermal material)
634691-001	AMD Turion II P560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 25 W; includes replacement thermal material)
634861-001	250-GB, 7200-rpm, 7.0 mm hard drive (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)
634862-001	320-GB, 7200-rpm, 7.0 mm hard drive (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)
635225-001	250-GB, 7200-rpm, 7.0 mm hard drive (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)

Spare part number	Description
635494-001	AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, dual core, 35 W; includes replacement thermal material)
635495-001	AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W; includes replacement thermal material)
635496-001	AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, quad core, 35 W; includes replacement thermal material)
635501-001	Intel Core i7-2630M 2.00-GHz (SC turbo up to 2.90-GHz) processor (6.0-MB L3 cache, quad core, 45 W; includes replacement thermal material)
636631-001	9-cell, 100-Whr, 3.00-Ah Li-ion battery
636635-001	AMD Athlon II P360 2.30-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W; includes replacement thermal material)
638037-001	Intel Core i3-2310M 2.10-GHz processor (3.0-MB L3 cache, dual core, 35 W; includes replacement thermal material)
638039-001	Intel Core i5-2410M 2.30-GHz (SC turbo up to 2.90-GHz) processor (3.0-MB L3 cache, dual core, 35 W; includes replacement thermal material)
638974-001	1-TB, 5400-rpm, 12.7 mm hard drive (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)
639387-001	Webcam/microphone module
639736-001	1-GB memory module (DDR3, 10600, 1333-MHz)
640411-001	Antenna Kit (includes left and right wireless antenna cables and transceivers)
640412-001	Display enclosure in espresso black finish
640414-001	Display enclosure in linen white finish
640415-001	Display enclosure in ruby red finish
640417-001	Display enclosure in dark umber finish
640418-001	Base enclosure for use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish (includes battery release latch and 4 rubber feet)
640419-001	Base enclosure for use only with computer models in dark umber and steel gray finish (includes battery release latch and 4 rubber feet)
640420-001	Display bezel for use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish
640421-001	Display bezel for use only with computer models in dark umber and steel gray finish
640422-001	Cable Kit (includes the optical drive connector cable, hard drive connector cable, power button board cable, fingerprint reader board cable, TouchPad cable, TouchPad button board cable, and USB board cable)
	NOTE: See <u>Cable Kit on page 27</u> for more Cable Kit spare part information.
640423-001	Display Cable Kit for use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish (includes display panel cable and webcam/microphone module cable)

Spare part number	Description
640424-001	Power connector cable
640425-001	Fan/heat sink assembly for use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory (includes replacement thermal material)
640426-001	Fan/heat sink assembly for use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory (includes replacement thermal material)
640427-001	Fingerprint reader board (select models only, includes bracket, but does not include cable)
	NOTE: The fingerprint reader board cable is not included in the fingerprint reader board spare part kit. The fingerprint reader board cable is included in the Cable Kit, spare part number 640422-001.
640428-001	Hard Drive Hardware Kit (includes hard drive bracket and screws)
640429-001	Display Hinge Kit (includes left and right display hinges and brackets)
640430-001	15.6-in, HD, LED, BrightView display assembly in espresso black finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
640431-001	15.6-in, HD, LED, BrightView display assembly in dark umber finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
640433-001	15.6-in, HD, LED, BrightView display assembly in linen white finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
640434-001	15.6-in, HD, LED, BrightView display assembly in ruby red finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
640436-001	Keyboard in black finish for use with all computer models in the United States (includes keyboard cable)
640436-031	Keyboard in black finish for use with all computer models in the United Kingdom and Singapore (includes keyboard cable)
640436-041	Keyboard in black finish for use with all computer models in Germany (includes keyboard cable)
640436-051	Keyboard in black finish for use with all computer models in France (includes keyboard cable)
640436-061	Keyboard in black finish for use with all computer models in Italy (includes keyboard cable)
640436-071	Keyboard in black finish for use with all computer models in Spain (includes keyboard cable)
640436-121	Keyboard in black finish for use with all computer models in Canada (includes keyboard cable)
640436-131	Keyboard in black finish for use with all computer models in Portugal (includes keyboard cable)
640436-141	Keyboard in black finish for use with all computer models in Turkey (includes keyboard cable)
640436-161	Keyboard in black finish for use with all computer models in Latin America (includes keyboard cable)
640436-171	Keyboard in black finish for use with all computer models in Saudi Arabia (includes keyboard cable)
640436-201	Keyboard in black finish for use only with computer models equipped with an AMD processor in Brazil (includes keyboard cable)
640436-211	Keyboard in black finish for use with all computer models in Hungary (includes keyboard cable)

Spare part number	Description
640436-221	Keyboard in black finish for use with all computer models in the Czech Republic and Slovakia (includes keyboard cable)
640436-251	Keyboard in black finish for use with all computer models in Russia (includes keyboard cable)
640436-281	Keyboard in black finish for use only with computer models equipped with an Intel processor in Thailand (includes keyboard cable)
640436-291	Keyboard in black finish for use only with computer models equipped with an Intel processor in Japan (includes keyboard cable)
640436-A41	Keyboard in black finish for use with all computer models in Belgium (includes keyboard cable)
640436-AB1	Keyboard in black finish for use only with computer models equipped with an Intel processor in Taiwan (includes keyboard cable)
640436-AD1	Keyboard in black finish for use only with computer models equipped with an Intel processor in South Korea (includes keyboard cable)
640436-B31	Keyboard in black finish for use with all computer models in the Netherlands (includes keyboard cable)
640436-BA1	Keyboard in black finish for use with all computer models in Slovenia (includes keyboard cable)
640436-BB1	Keyboard in black finish for use only with computer models equipped with an Intel processor in Israel (includes keyboard cable)
640436-BG1	Keyboard in black finish for use with all computer models in Switzerland (includes keyboard cable)
640436-DH1	Keyboard in black finish for use with all computer models in Denmark, Finland, and Norway (includes keyboard cable)
640436-DJ1	Keyboard in black finish for use with all computer models in Greece (includes keyboard cable)
640439-001	Power button board (does not include cable)
	NOTE: The power button board cable is not included in the power button board spare part kit. The power button board cable is included in the Cable Kit, spare part number 640422-001.
640441-001	USB board (does not include cable)
	NOTE: The USB board cable is not included in the USB board spare part kit. The USB board cable is included in the Cable Kit, spare part number 640422-001.
640443-001	Speaker cover for use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish
640444-001	Plastics Kit (includes the service cover)
640445-001	15.6-in, HD, LED, BrightView display panel
640447-001	Screw Kit
640448-001	Display Screw Kit
640449-001	Speaker Kit (includes left and right speakers and cable)
640450-001	System board for use only with computer models equipped with an AMD processor, the RS880M chipset, a graphics subsystem with UMA memory, and USB version 2.0 (includes replacement thermal material)

Spare part number	Description
640451-001	System board for use only with computer models equipped with an AMD processor, the RS880MD chipset, the HD6470 graphics subsystem chipset, 512-MB of graphics subsystem discrete memory, and USB version 2.0 (includes replacement thermal material)
640452-001	System board for use only with computer models equipped with an AMD processor, the RS880MD chipset, HD6650 graphics subsystem chipset, 1024-MB of graphics subsystem discrete memory, and USB version 2.0 (includes replacement thermal material)
640453-001	System board for use only with computer models equipped with an AMD processor, the RS880MD chipset, the HD6470 graphics subsystem chipset, 512-MB of graphics subsystem discrete memory, and USB version 3.0 (includes replacement thermal material)
640454-001	System board for use only with computer models equipped with an AMD processor, the RS880MD chipset, HD6650 graphics subsystem chipset, 1024-MB of graphics subsystem discrete memory, and USB version 3.0 (includes replacement thermal material)
640455-001	System board for use only with computer models equipped with and AMD processor, the RS880M chipset, a graphics subsystem with UMA memory, and USB version 3.0 (includes replacement thermal material)
640456-001	Thermal Material Kit for use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory (includes replacement thermal paste and pads)
640457-001	Thermal Material Kit for use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory (includes replacement thermal paste and pads)
640458-001	Top cover in espresso black finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.
640460-001	Top cover in linen white finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.
640461-001	Top cover in ruby red finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.
640463-001	Top cover in dark umber finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.
640926-001	Realtek RTL8191SE 802.11b/g/n 1×1 WiFi Adapter for use only with computer models equipped with an AMD processor
641438-001	Speaker cover for use only with computer models in dark umber and steel gray finish
641472-001	Display enclosure in Pacific blue finish
641473-001	Display enclosure in Sonoma red finish
641474-001	Display enclosure in pearl pink finish

Spare part number	Description
641475-001	Display enclosure in butter gold finish
641476-001	Fan/heat sink assembly for use only with computer models equipped with an Intel processor and a graphics subsystem with UMA memory (includes replacement thermal material)
641477-001	Fan/heat sink assembly for use only with computer models equipped with an Intel processor and a graphics subsystem with 1024-MB discrete memory (includes replacement thermal material)
641478-001	Bluetooth module cable (for use only with computer models equipped with an Intel processor)
641479-001	15.6-in, HD, LED, BrightView display assembly in Pacific blue finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
641480-001	15.6-in, HD, LED, BrightView display assembly in Sonoma red finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
641481-001	15.6-in, HD, LED, BrightView display assembly in pearl pink finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
641482-001	15.6-in, HD, LED, BrightView display assembly in butter gold finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
641484-001	System board for use only with computer models equipped with an Intel dual core processor, the Intel HD6490 graphics subsystem, 1024-MB of discrete memory, and USB version 3.0 (includes replacement thermal material)
641485-001	System board for use only with computer models equipped with an Intel dual core processor, a graphics subsystem with UMA memory, and USB version 3.0 (includes replacement thermal material)
641486-001	System board for use only with computer models equipped with an Intel quad core processor, the Intel HD6490 graphics subsystem, and 1024-MB of discrete memory (includes replacement thermal material)
641487-001	System board for use only with computer models equipped with an Intel dual core processor, the Intel HD6490 graphics subsystem, 1024-MB of discrete memory, and USB version 2.0 (includes replacement thermal material)
641488-001	System board for use only with computer models equipped with an Intel quad core processor, the Intel HD6770 graphics subsystem, and 1024-MB of discrete memory (includes replacement thermal material)
641489-001	System board for use only with computer models equipped with an Intel dual core processor, the Intel HD6770 graphics subsystem, and 1024-MB of discrete memory (includes replacement thermal material)
641490-001	System board for use only with computer models equipped with an Intel dual core processor, a graphics subsystem with UMA memory, and USB version 2.0 (includes replacement thermal material)
641491-001	System board for use only with computer models equipped with an Intel quad core processor and a graphics subsystem with UMA memory (includes replacement thermal material)
641492-001	Thermal Material Kit for use only with computer models equipped with an Intel processor and a graphics subsystem with UMA memory (includes replacement thermal paste and pads)
641493-001	Thermal Material Kit for use only with computer models equipped with an Intel processor and a graphics subsystem with 1024-MB of discrete memory (includes replacement thermal paste and pads)

Spare part number	Description	
641494-001	Top cover in Pacific blue finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)	
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.	
641495-001	Top cover in Sonoma red finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)	
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.	
641496-001	Top cover in pearl pink finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)	
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.	
641497-001	Top cover in butter gold finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)	
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.	
641672-001	320-GB, 7200-rpm, 7.0 mm hard drive (2.5-in, SATA, does not include hard drive bracket, hard drive connector cable, or screws)	
641807-001	Display hinge covers	
641809-001	DVD±RW and CD-RW Super Multi Double-Layer Combo Drive with LightScribe	
641810-001	Display Rubber Kit	
641824-001	Blu-ray ROM with LightScribe DVD \pm R/RW Super Multi Double-Layer Drive (for use only with computer models equipped with an Intel processor)	
641825-001	160-GB solid-state drive (for use only with computer models equipped with an Intel processor)	
644362-001	Display Cable Kit for use only with computer models in dark umber and steel gray finish (includes display panel cable and webcam/microphone module cable)	
644363-001	Keyboard in silver finish for use with all computer models in the United States (includes keyboard cable)	
644363-031	Keyboard in silver finish for use with all computer models in the United Kingdom and Singapore (includes keyboard cable)	
644363-041	Keyboard in silver finish for use with all computer models in Germany (includes keyboard cable)	
644363-051	Keyboard in silver finish for use with all computer models in France (includes keyboard cable)	
644363-061	Keyboard in silver finish for use with all computer models in Italy (includes keyboard cable)	
644363-071	Keyboard in silver finish for use with all computer models in Spain (includes keyboard cable)	
644363-121	Keyboard in silver finish for use with all computer models in Canada (includes keyboard cable)	
644363-131	Keyboard in silver finish for use with all computer models in Portugal (includes keyboard cable)	
644363-141	Keyboard in silver finish for use with all computer models in Turkey (includes keyboard cable)	

Spare part number	Description
644363-161	Keyboard in silver finish for use with all computer models in Latin America (includes keyboard cable)
644363-171	Keyboard in silver finish for use with all computer models in Saudi Arabia (includes keyboard cable)
644363-201	Keyboard in silver finish for use only with computer models equipped with an AMD processor in Brazil (includes keyboard cable)
644363-211	Keyboard in silver finish for use with all computer models in Hungary (includes keyboard cable)
644363-221	Keyboard in silver finish for use with all computer models in the Czech Republic and Slovakia (includes keyboard cable)
644363-251	Keyboard in silver finish for use with all computer models in Russia (includes keyboard cable)
644363-281	Keyboard in silver finish for use only with computer models equipped with an Intel processor in Thailand (includes keyboard cable)
644363-291	Keyboard in silver finish for use only with computer models equipped with an Intel processor in Japan (includes keyboard cable)
644363-A41	Keyboard in silver finish for use with all computer models in Belgium (includes keyboard cable)
644363-AB1	Keyboard in silver finish for use only with computer models equipped with an Intel processor in Taiwan (includes keyboard cable)
644363-AD1	Keyboard in silver finish for use only with computer models equipped with an Intel processor in South Korea (includes keyboard cable)
644363-B31	Keyboard in silver finish for use with all computer models in the Netherlands (includes keyboard cable)
644363-BA1	Keyboard in silver finish for use with all computer models in Slovenia (includes keyboard cable)
644363-BB1	Keyboard in silver finish for use only with computer models equipped with an Intel processor in Israel (includes keyboard cable)
644363-BG1	Keyboard in silver finish for use with all computer models in Switzerland (includes keyboard cable)
644363-DH1	Keyboard in silver finish for use with all computer models in Denmark, Finland, and Norway (includes keyboard cable)
644363-DJ1	Keyboard in silver finish for use with all computer models in Greece (includes keyboard cable)
650796-001	Display enclosure in steel gray finish
650797-001	Fan/heat sink assembly for use only with computer models equipped with an Intel processor and a graphics subsystem with 2048-MB discrete memory (includes replacement thermal material)
650798-001	15.6-in, HD, LED, BrightView display assembly in steel gray finish (includes webcam, two microphones, and wireless antenna transceivers and cables)
650799-001	System board for use only with computer models equipped with an Intel quad core processor and the Intel HD6770 graphics subsystem with 2048-MB of discrete memory (includes replacement thermal material)
650800-001	System board for use only with computer models equipped with an Intel dual core processor and the Intel HD6770 graphics subsystem with 2048-MB of discrete memory (includes replacement thermal material)

Spare part number	Description	
650801-001	Thermal Material Kit for use only with computer models equipped with an Intel processor and a graphics subsystem with 2048-MB of discrete memory (includes replacement thermal paste and pads)	
650802-001	Top cover in steel gray finish (includes TouchPad and TouchPad button board, but does not include TouchPad cable or TouchPad button board cable)	
	NOTE: The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.	

4 Removal and replacement procedures

Preliminary replacement requirements

Tools required

You will need the following tools to complete the removal and replacement procedures:

- Flat-bladed screwdriver
- Magnetic screwdriver
- Phillips PO and P1 screwdrivers

Service considerations

The following sections include some of the considerations that you must keep in mind during disassembly and assembly procedures.

NOTE: As you remove each subassembly from the computer, place the subassembly (and all accompanying screws) away from the work area to prevent damage.

Plastic parts

CAUTION: Using excessive force during disassembly and reassembly can damage plastic parts. Use care when handling the plastic parts. Apply pressure only at the points designated in the maintenance instructions.

Cables and connectors

CAUTION: When servicing the computer, be sure that cables are placed in their proper locations during the reassembly process. Improper cable placement can damage the computer.

Cables must be handled with extreme care to avoid damage. Apply only the tension required to unseat or seat the cables during removal and insertion. Handle cables by the connector whenever possible. In all cases, avoid bending, twisting, or tearing cables. Be sure that cables are routed in such a way that they cannot be caught or snagged by parts being removed or replaced. Handle flex cables with extreme care; these cables tear easily.

Drive handling

<u>CAUTION:</u> Drives are fragile components that must be handled with care. To prevent damage to the computer, damage to a drive, or loss of information, observe these precautions:

Before removing or inserting a hard drive, shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.

Before handling a drive, be sure that you are discharged of static electricity. While handling a drive, avoid touching the connector.

Before removing a diskette drive or optical drive, be sure that a diskette or disc is not in the drive and be sure that the optical drive tray is closed.

Handle drives on surfaces covered with at least one inch of shock-proof foam.

Avoid dropping drives from any height onto any surface.

After removing a hard drive, an optical drive, or a diskette drive, place it in a static-proof bag.

Avoid exposing an internal hard drive to products that have magnetic fields, such as monitors or speakers.

Avoid exposing a drive to temperature extremes or liquids.

If a drive must be mailed, place the drive in a bubble pack mailer or other suitable form of protective packaging and label the package "FRAGILE."

Grounding guidelines

Electrostatic discharge damage

Electronic components are sensitive to electrostatic discharge (ESD). Circuitry design and structure determine the degree of sensitivity. Networks built into many integrated circuits provide some protection, but in many cases, ESD contains enough power to alter device parameters or melt silicon junctions.

A discharge of static electricity from a finger or other conductor can destroy static-sensitive devices or microcircuitry. Even if the spark is neither felt nor heard, damage may have occurred.

An electronic device exposed to ESD may not be affected at all and can work perfectly throughout a normal cycle. Or the device may function normally for a while, then degrade in the internal layers, reducing its life expectancy.

<u>CAUTION:</u> To prevent damage to the computer when you are removing or installing internal components, observe these precautions:

Keep components in their electrostatic-safe containers until you are ready to install them.

Before touching an electronic component, discharge static electricity by using the guidelines described in this section.

Avoid touching pins, leads, and circuitry. Handle electronic components as little as possible.

If you remove a component, place it in an electrostatic-safe container.

The following table shows how humidity affects the electrostatic voltage levels generated by different activities.

Typical electrostatic voltage levels			
	Relative humidity		
Event	10%	40%	55%
Walking across carpet	35,000 V	15,000 V	7,500 V
Walking across vinyl floor	12,000 V	5,000 V	3,000 V
Motions of bench worker	6,000 V	800 V	400 V
Removing DIPS from plastic tube	2,000 V	700 V	400 V
Removing DIPS from vinyl tray	11,500 V	4,000 V	2,000 V
Removing DIPS from Styrofoam	14,500 V	5,000 V	3,500 V
Removing bubble pack from PCB	26,500 V	20,000 V	7,000 V
Packing PCBs in foam-lined box	21,000 V	11,000 V	5,000 V

Packaging and transporting guidelines

Follow these grounding guidelines when packaging and transporting equipment:

- To avoid hand contact, transport products in static-safe tubes, bags, or boxes.
- Protect ESD-sensitive parts and assemblies with conductive or approved containers or packaging.
- Keep ESD-sensitive parts in their containers until the parts arrive at static-free workstations.
- Place items on a grounded surface before removing items from their containers.
- Always be properly grounded when touching a component or assembly.
- Store reusable ESD-sensitive parts from assemblies in protective packaging or nonconductive foam.
- Use transporters and conveyors made of antistatic belts and roller bushings. Be sure that
 mechanized equipment used for moving materials is wired to ground and that proper materials
 are selected to avoid static charging. When grounding is not possible, use an ionizer to dissipate
 electric charges.

Workstation guidelines

Follow these grounding workstation guidelines:

- Cover the workstation with approved static-shielding material.
- Use a wrist strap connected to a properly grounded work surface and use properly grounded tools and equipment.
- Use conductive field service tools, such as cutters, screwdrivers, and vacuums.
- When fixtures must directly contact dissipative surfaces, use fixtures made only of staticsafe materials.
- Keep the work area free of nonconductive materials, such as ordinary plastic assembly aids and Styrofoam.
- Handle ESD-sensitive components, parts, and assemblies by the case or PCM laminate. Handle these items only at static-free workstations.
- Avoid contact with pins, leads, or circuitry.
- Turn off power and input signals before inserting or removing connectors or test equipment.

Equipment guidelines

Grounding equipment must include either a wrist strap or a foot strap at a grounded workstation.

- When seated, wear a wrist strap connected to a grounded system. Wrist straps are flexible straps with a minimum of one megohm ±10% resistance in the ground cords. To provide proper ground, wear a strap snugly against the skin at all times. On grounded mats with banana-plug connectors, use alligator clips to connect a wrist strap.
- When standing, use foot straps and a grounded floor mat. Foot straps (heel, toe, or boot straps) can be used at standing workstations and are compatible with most types of shoes or boots. On conductive floors or dissipative floor mats, use foot straps on both feet with a minimum of one megohm resistance between the operator and ground. To be effective, the conductive must be worn in contact with the skin.

The following grounding equipment is recommended to prevent electrostatic damage:

- Antistatic tape
- Antistatic smocks, aprons, and sleeve protectors
- Conductive bins and other assembly or soldering aids
- Nonconductive foam
- Conductive tabletop workstations with ground cords of one megohm resistance
- Static-dissipative tables or floor mats with hard ties to the ground
- Field service kits
- Static awareness labels
- Material-handling packages
- Nonconductive plastic bags, tubes, or boxes
- Metal tote boxes
- Electrostatic voltage levels and protective materials

The following table lists the shielding protection provided by antistatic bags and floor mats.

Material	Use	Voltage protection level
Antistatic plastics	Bags	1,500 V
Carbon-loaded plastic	Floor mats	7,500 V
Metallized laminate	Floor mats	5,000 V

Component replacement procedures

This chapter provides removal and replacement procedures.

There are as many as 88 screws that must be removed, replaced, or loosened when servicing the computer. Make special note of each screw and screw lock size and location during removal and replacement.

Service tag

When ordering parts or requesting information, provide the computer serial number and model number provided on the service tag.




ltem	Component	Description
(1)	Product name	This is the product name affixed to the front of the computer.
(2)	Serial number (s/n)	This is an alphanumeric identifier that is unique to each product.
(3)	Part number/Product number (p/n)	This number provides specific information about the product's hardware components. The part number helps a service technician determine what components and parts are needed.

ltem	Component	Description
(4)	Warranty period	This number describes the duration of the warranty period for the computer.
(5)	Model description	This is the alphanumeric identifier used to locate documents, drivers, and support for the computer.

Computer feet

the computer feet are adhesive-backed rubber pads. There are 4 rubber feet that attach to the base enclosure in the locations illustrated below.

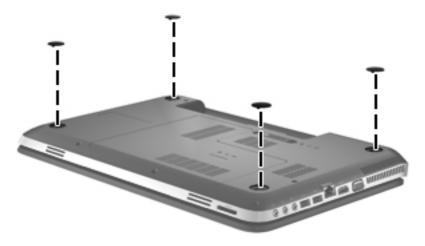

Battery

Description	Spare part number
9-cell, 100-Whr, 3.00-Ah Li-ion battery	636631-001
6-cell, 62-Whr, 2.80-Ah Li-ion battery	593562-001
6-cell, 55-Whr, 2.55-Ah Li-ion battery	593554-001

Before disassembling the computer, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.

Remove the battery:

- 1. Slide the battery release latch (1) to release the battery.
- 2. Pivot the front edge of the battery (2) up and back.
- 3. Remove the battery (3) from the computer.



To insert the battery:

- 1. Align the tabs on the rear edge of the battery with the notches on the rear edge of the battery bay.
- 2. Pivot the front edge of the battery down into the battery bay until it is seated. (The battery release latch will automatically lock into place.)

Optical drive

NOTE: The optical drive spare part kit includes a bezel and bracket.

Description	Spare part number
Blu-ray ROM with LightScribe DVD \pm R/RW Super Multi Double-Layer Drive (for use only with computer models equipped with an Intel processor)	641824-001
DVD±RW and CD-RW Super Multi Double-Layer Combo Drive with LightScribe	641809-001

Before removing the optical drive, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>).

Remove the optical drive:


Slide the service cover release latch to release the service cover.




2. Lift the rear edge of the service cover up and forward until it rests at an angle.



- **3.** Remove the service cover. The service cover is available in the Plastics Kit, spare part number 640444-001.
- 4. Remove the Phillips PM2.5×4.0 screw that secures the optical drive to the computer.



5. Remove the optical drive by sliding it out of the optical drive bay.



6. If it is necessary to replace the optical drive bracket, position the optical drive with the rear panel toward you.

- 7. Remove the two Phillips PM2.0×4.0 screws (1) that secure the bracket to the optical drive.
- 8. Remove the optical drive bracket (2).



Reverse this procedure to reassemble and install the optical drive.

Hard drive

NOTE: The hard drive and solid-state drive spare part kit does not include the bracket, connector cable, or screws. The bracket and screws are included in the Hard Drive Hardware Kit, spare part number 640428-001. The connector cable is included in the Cable Kit, spare part number 640422-001.

Description	Spare part number
1-TB, 5400-rpm, 12.7 mm	638974-001
750-GB, 7200-rpm, 9.5 mm	633252-001
750-GB, 5400-rpm, 9.5 mm	634250-001
640-GB, 7200-rpm, 9.5 mm	621046-001
500-GB, 7200-rpm, 9.5 mm	608218-001
320-GB, 7200-rpm, 7.0 mm	641672-001 and 634862-001
250-GB, 7200-rpm, 7.0 mm	635225-001 and 634861-001
160-GB solid-state drive (for use only with computer models equipped with an Intel processor)	641825-001


Before removing the hard drive, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>).
- **5.** Remove the service cover (see Optical drive on page 51).


Remove the hard drive:

- 1. Disconnect the hard drive connector cable (1) from the system board.
- 2. Remove the four Phillips PM2.5×4.0 screws (2) that secure the hard drive to the computer.

3. Use the Mylar tab built into the hard drive bracket to lift and remove the hard drive (3) from the computer.

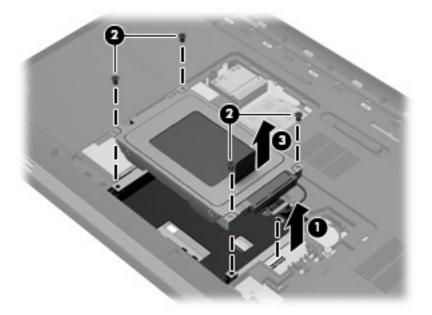

- 4. If it is necessary to replace the hard drive connector cable or hard drive bracket:
 - **a.** Remove the four Phillips PM3.0×4.0 screws **(1)** that secure the hard drive bracket to the hard drive.
 - **b.** Remove the hard drive bracket (2) from the hard drive.
 - **c.** Disconnect the hard drive connector cable **(3)** from the hard drive.



Reverse this procedure to reassemble and install the hard drive.

RTC battery


Description	Spare part number
RTC battery	608771-001

Before removing the RTC battery, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>).
- 5. Remove the service cover (see Optical drive on page 51).

Remove the RTC battery:

A Remove the RTC battery from the socket on the system board.

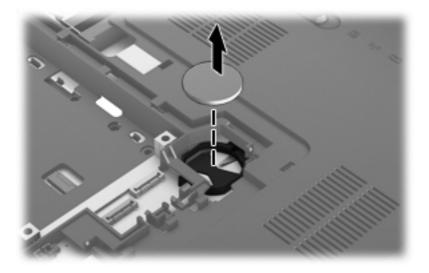

Reverse this procedure to install the RTC battery.

Memory module


Description	Spare part number
4-GB (DDR3, 10600, 1333-MHz)	621569-001
2-GB (DDR3, 10600, 1333-MHz)	621565-001
1-GB (DDR3, 10600, 1333-MHz)	639736-001

Before removing a memory module, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>).
- 5. Remove the service cover (see Optical drive on page 51).

Remove the memory module:

- 1. Spread the retaining tabs (1) on each side of the memory module slot to release the memory module. (The memory module tilts up.)
- 2. Remove the memory module (2) by pulling it away from the slot at an angle.

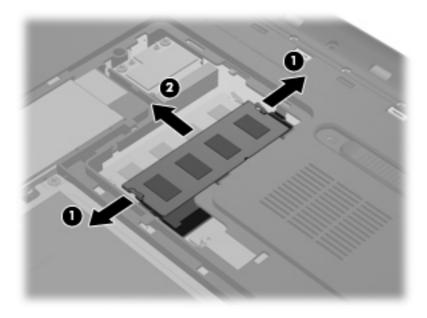

Reverse this procedure to install a memory module.

WLAN module

Description	Spare part number
For use on all computer models:	
Broadcom 4313 802.11b/g/n 1×1 WiFi and 2070 Bluetooth 2.1+EDR Combo adapter (BT3.0+HS ready)	600370-001
Broadcom 4313 802.11b/g/n 1×1 WiFi Adapter	593836-001
Ralink RT3090BC4 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (BT3.0+HS ready)	630705-001
Ralink 5390GN 802.11b/g/n 1×1 WiFi Adapter	630703-001
For use only with computer models equipped with an AMD processor:	
Atheros 9285G 802.11b/g/n 1×1 WiFi Adapter	605560-005
Atheros AR8002WB-1NGB 802.11b/g/n 1×1 WiFi and Bluetooth 2.1+EDR Combo Adapter (BT3.0+HS ready)	593127-001
Realtek RTL8191SE 802.11b/g/n 1×1 WiFi Adapter	640926-001
Realtek 8188BC8 802.11a/b/g/n 2×2 WiFi and Bluetooth 3.0+HS Combo Adapter	602993-001
For use only with computer models equipped with an Intel processor:	
Intel Centrino Advanced-N 6230	631956-001
Intel Centrino Wireless-N 1000	593530-001
Intel Centrino Wireless-N + WiMAX 6150	633817-001


CAUTION: To prevent an unresponsive system, replace the wireless module only with a wireless module authorized for use in the computer by the governmental agency that regulates wireless devices in your country or region. If you replace the module and then receive a warning message, remove the module to restore device functionality, and then contact technical support.

Before removing the WLAN module, follow these steps:


- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>).
- 5. Remove the service cover (see Optical drive on page 51).

Remove the WLAN module:


- 1. Disconnect the WLAN antenna cables from the terminals on the WLAN module.
- NOTE: The #1/black WLAN antenna cable is connected to the WLAN module Main terminal. The #2/gray WLAN antenna cable is connected to the WLAN module Aux terminal.




2. Remove the two Phillips PM2.0×4.0 screws that secure the WLAN module to the system board. (The WLAN module tilts up.)



3. Remove the WLAN module by pulling the module away from the slot at an angle.



NOTE: If the WLAN antennas are not connected to the terminals on the WLAN module, the protective sleeves must be installed on the antenna connectors, as shown in the following illustration.

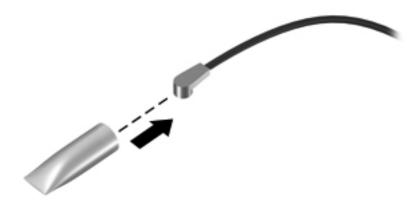

Reverse this procedure to install the WLAN module.

Keyboard

NOTE: The keyboard spare part kit includes a keyboard cable.

Description	Spare part number	Description	Spare part number			
Keyboard in black finish:						
For use only with computer models equipped with an AMD processor in Brazil	640436-201	For use only with computer models equipped with an Intel processor in South Korea	640436-AD1			
For use only with computer models equipped with an Intel processor in Israel	640436-BB1	For use only with computer models equipped with an Intel processor in Taiwan	640436-AB1			
For use only with computer models equipped with an Intel processor in Japan	640436-291	For use only with computer models equipped with an Intel processor in Thailand	640436-281			
For use with all computer models in Belgium	640436-A41	For use with all computer models in the Netherlands	640436-B31			
For use with all computer models in Canada	640436-121	For use with all computer models in Portugal	640436-131			
For use with all computer models in the Czech Republic and Slovakia	640436-221	For use with all computer models in Russia	640436-251			
For use with all computer models in Denmark, Finland, and Norway	640436-DH1	For use with all computer models in Saudi Arabia	640436-171			
For use with all computer models in France	640436-051	For use with all computer models in Slovenia	640436-BA1			
For use with all computer models in Germany	640436-041	For use with all computer models in Spain	640436-071			
For use with all computer models in Greece	640436-DJ1	For use with all computer models in Switzerland	640436-BG1			
For use with all computer models in Humgary	640436-211	For use with all computer models in Turkey	640436-141			
For use with all computer models in Italy	640436-061	For use with all computer models in the United Kingdom and Singapore	640436-031			
For use with all computer models in Latin America	640436-161	For use with all computer models in the United States	640436-001			
	Keyboard ir	n silver finish:				
For use only with computer models equipped with an AMD processor in Brazil	644363-201	For use only with computer models equipped with an Intel processor in South Korea	644363-AD1			
For use only with computer models equipped with an Intel processor in Israel	644363-BB1	For use only with computer models equipped with an Intel processor in Taiwan	644363-AB1			


Description	Spare part number	Description	Spare part number
For use only with computer models equipped with an Intel processor in Japan	644363-291	For use only with computer models equipped with an Intel processor in Thailand	644363-281
For use with all computer models in Belgium	644363-A41	For use with all computer models in the Netherlands	644363-B31
For use with all computer models in Canada	644363-121	For use with all computer models in Portugal	644363-131
For use with all computer models in the Czech Republic and Slovakia	644363-221	For use with all computer models in Russia	644363-251
For use with all computer models in Denmark, Finland, and Norway	644363-DH1	For use with all computer models in Saudi Arabia	644363-171
For use with all computer models in France	644363-051	For use with all computer models in Slovenia	644363-BA1
For use with all computer models in Germany	644363-041	For use with all computer models in Spain	644363-071
For use with all computer models in Greece	644363-DJ1	For use with all computer models in Switzerland	644363-BG1
For use with all computer models in Humgary	644363-211	For use with all computer models in Turkey	644363-141
For use with all computer models in Italy	644363-061	For use with all computer models in the United Kingdom and Singapore	644363-031
For use with all computer models in Latin America	644363-161	For use with all computer models in the United States	644363-001

Before removing the keyboard, follow these steps:


- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>).
- 5. Remove the service cover (see Optical drive on page 51).

Remove the keyboard:

Remove the Phillips PM2.5×4.0 screw that secures the keyboard to the computer.

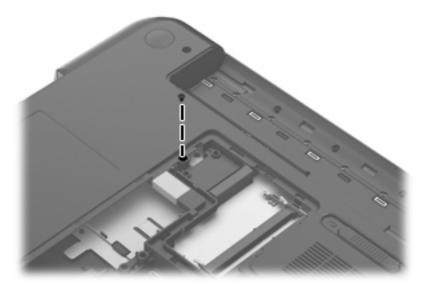

- Rest the computer on its left side.
- 3. Open the computer.
- 4. Insert a screw driver or similar thin tool into the keyboard screw hole, and then press on the back of the keyboard until the keyboard disengages from the computer.

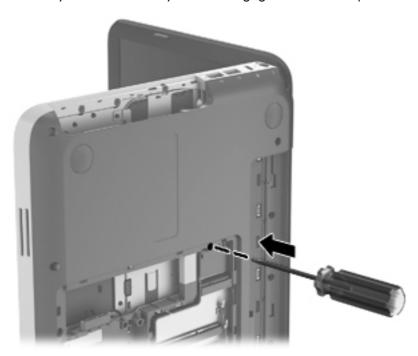


5. Turn the computer right-side up with the front toward you.

6. Lift the rear edge **(1)** of the keyboard, and then slide the keyboard **(2)** back until the keyboard cable is accessible.



7. Release the zero insertion force (ZIF) connector (1) to which the keyboard cable is attached, and then disconnect the keyboard cable (2) from the system board.

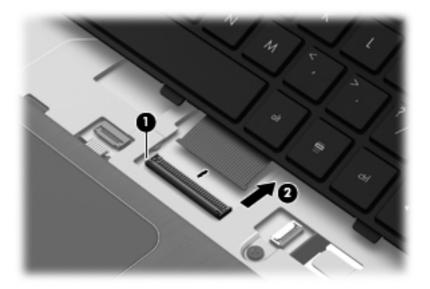

8. Remove the keyboard.

Reverse this procedure to install the keyboard.

Top cover

NOTE: The top cover spare part kit includes the TouchPad and TouchPad button board, but does not include the TouchPad cable or TouchPad button board cable. The TouchPad cable and TouchPad button board cable are included in the Cable Kit, spare part number 640422-001.

Description	Spare part number
In butter gold finish	641497-001
In dark umber finish	640463-001
In espresso black finish	640458-001
In linen white finish	640460-001
In Pacific blue finish	641494-001
In pearl pink finish	641496-001
In ruby red finish	640461-001
In Sonoma red finish	641495-001
In steel gray finish	650802-001

Before removing the top cover, follow these steps:


- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)

NOTE: When replacing the top cover, be sure that the power button board and cable (see Power button board on page 69) and fingerprint reader board and cable (see Fingerprint reader board on page 71) are removed from the defective top cover and installed on the replacement top cover.


Remove the top cover:

- Close the computer.
- Turn the computer upside down, with the front toward you.

3. Remove the seven Phillips PM2.5×10.0 screws that secure the top cover to the computer.

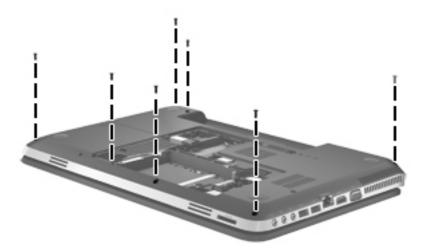


- 4. Remove the following screws that secure the top cover to the computer:
 - Three Phillips PM2.0×3.0 screws (1) in the optical drive bay
 - Three Phillips PM2.5×6.0 screws (2)
 - One Phillips PM2.0×4.0 screw (3) in the hard drive bay

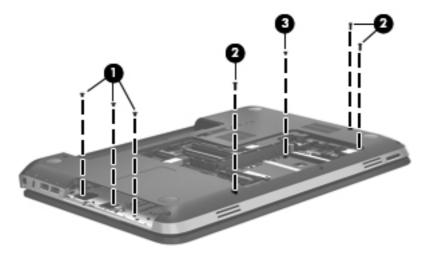


- 5. Turn the computer right-side up, with the front toward you.
- Open the computer.

- 7. Release the ZIF connectors to which the following cables are attached, and then disconnect the cables from the system board:
- NOTE: The power button board cable, TouchPad button board cable, and fingerprint reader board cable are included in the Cable Kit, spare part number 640422-001.
 - Power button board cable (1)
 - TouchPad button board cable (2)
 - Fingerprint reader board cable (3) (select models only)

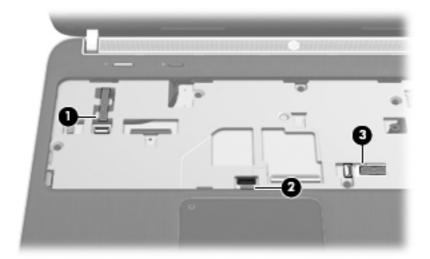


8. Remove the seven Phillips PM2.5×6.0 screws that secure the top cover to the computer.

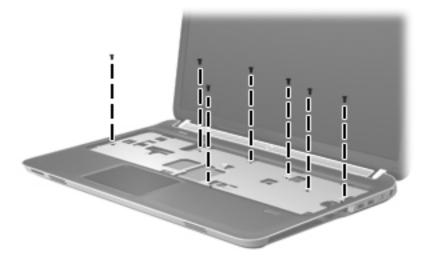

9. Lift the rear edge of the top cover (1) until the left and right sides disengage from the base enclosure.

10. Remove the top cover (2).

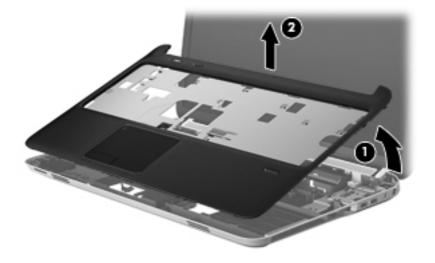

Reverse this procedure to install the top cover.

Power button board

Description	Spare part number
Power button board (does not include cable)	640439-001
NOTE: The power button board cable is not included in the power button board spare part kit. The power button board cable is included in the Cable Kit, spare part number 640422-001.	


Before removing the power button board, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)

Remove the power button board:

- 1. Turn the top cover upside down, with the front toward you.
- 2. Release the power button board cable from the clip (1) built into the top cover.
- 3. Remove the three Phillips PM2.0×4.0 screws (2) that secure the power button board to the top cover.

4. Remove the power button board and cable (3).

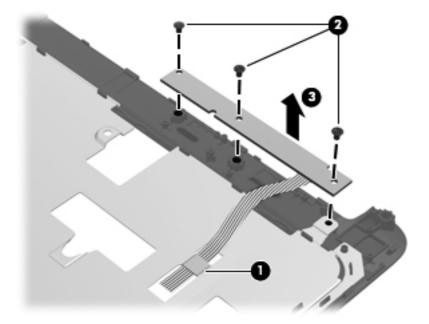

Reverse this procedure to install the power button board and cable.

Fingerprint reader board

Description	Spare part number
Fingerprint reader board (select models only, includes bracket, but does not include cable)	640427-001
NOTE: The fingerprint reader board cable is not included in the fingerprint reader board spare part kit. The fingerprint reader board cable is included in the Cable Kit, spare part number 640422-001.	


Before removing the fingerprint reader board, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see <u>Optical drive on page 51</u>)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)

Remove the fingerprint reader board and cable:

- 1. Turn the top cover upside down, with the front toward you.
- 2. Release the fingerprint reader board cable (1) from the clips (2) built into the top cover.
- 3. Remove the two Phillips PM2.0×4.0 screws (3) that secure the fingerprint reader board and bracket to the top cover.

4. Remove the fingerprint reader board bracket (4) and the fingerprint reader board (5).

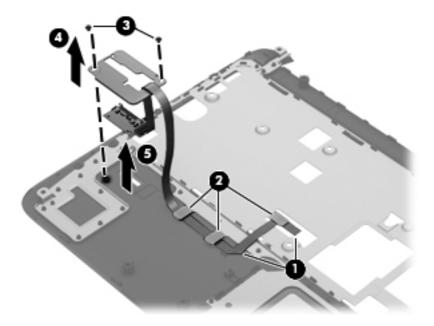

Reverse this procedure to install the fingerprint reader board and cable.

Bluetooth module

NOTE: This section applies only to computer models equipped with an Intel processor.

Description	Spare part number
Bluetooth module	537921-001
NOTE: The Bluetooth module spare part kit does not include a Bluetooth module cable. The Bluetooth module cable is available in the Cable Kit, spare part number 640422-001.	


Before removing the Bluetooth module and cable, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)


Remove the Bluetooth module and cable:

- 1. Disconnect the Bluetooth module cable (1) from the system board.
- Release the Bluetooth module cable from the clips (2) and the routing channel built into the front speaker assembly.

3. Release the Bluetooth module (3) from the clip built into the front speaker assembly.

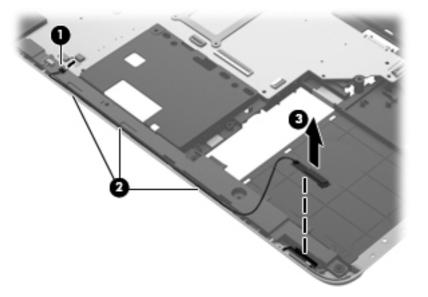

- 4. Remove the Bluetooth module and the Bluetooth module cable.
- 5. If it is necessary to replace the Bluetooth module cable, disconnect the cable from the Bluetooth module and replace it.

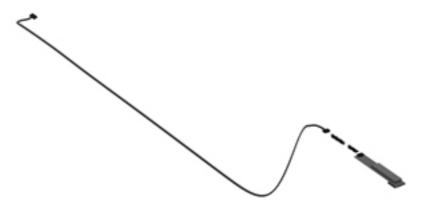

Reverse this procedure to install the Bluetooth module and cable.

USB board

Description	Spare part number
USB board (does not include cable)	640441-001


NOTE: The USB board cable is not included in the USB board spare part kit. The USB board cable is included in the Cable Kit, spare part number 640422-001.

Before removing the USB board, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)

Remove the USB board and cable:

- 1. Release the ZIF connector to which the USB board cable is connected, and then disconnect the USB board cable (1) from the system board.
- 2. Remove the Phillips PM2.5×5.0 screw (2) that secures the USB board to the base enclosure.
- 3. Remove the USB board (3) and cable.

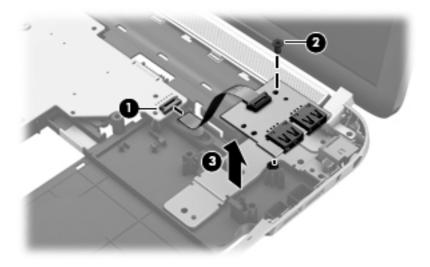

Reverse this procedure to install the USB board.

Power connector cable

Description	Spare part number
Power connector cable	640424-001


Before removing the power connector cable, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)
 - USB board (see <u>USB board on page 75</u>)

Remove the power connector cable:

- 1. Disconnect the power connector cable (1) from the system board.
- 2. Release the power connector cable from the clips (2) built into the base enclosure.
- **3.** Remove the two Phillips PM2.0×2.0 screws **(3)** that secure the power connector to the base enclosure.

4. Remove the power connector **(4)** from the base enclosure.

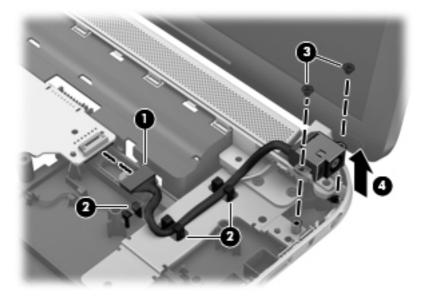

Reverse this procedure to install the power connector cable.

System board

- NOTE: The system board spare part kit includes replacement thermal material.

 Replacement thermal material is also available in the Thermal Material Kit, using the following spare part numbers:
 - 640457-001 For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory
 - 640456-001 For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory
 - 650801-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with 2048-MB of discrete memory
 - 641493-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with 1024-MB of discrete memory
 - 641492-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with UMA memory

Description	Spare part number
For use only with computer models equipped with an AMD processor:	
Equipped with the RS880MD chipset, HD6650 graphics subsystem chipset, 1024-MB of graphics subsystem discrete memory, and USB version 3.0	640454-001
Equipped with the RS880MD chipset, HD6650 graphics subsystem chipset, 1024-MB of graphics subsystem discrete memory, and USB version 2.0	640452-001
Equipped with the RS880MD chipset, HD6470 graphics subsystem chipset, 512-MB of graphics subsystem discrete memory, and USB version 3.0	640453-001
Equipped with the RS880MD chipset, HD6470 graphics subsystem chipset, 512-MB of graphics subsystem discrete memory, and USB version 2.0	640451-001
Equipped with the RS880M chipset, a graphics subsystem with UMA memory, and USB version 3.0	640455-001
Equipped with the RS880M chipset, a graphics subsystem with UMA memory, and USB version 2.0	640450-001
For use only with computer models equipped with an Intel processor:	
For use only with computer models equipped with a quad core processor and the Intel HD6770 graphics subsystem with 2048-MB of discrete memory	650799-001
For use only with computer models equipped with a dual core processor and the Intel HD6770 graphics subsystem with 2048-MB of discrete memory	650800-001
For use only with computer models equipped with a quad core processor and the Intel HD6770 graphics subsystem with 1024-MB of discrete memory	641488-001
For use only with computer models equipped with a dual core processor and the Intel HD6770 graphics subsystem with 1024-MB of discrete memory	641489-001
For use only with computer models equipped with a quad core processor and the Intel HD6490 graphics subsystem with 1024-MB of discrete memory	641486-001
For use only with computer models equipped with a dual core processor, the Intel HD6490 graphics subsystem, 1024-MB of discrete memory, and USB version 3.0	641484-001

Description	Spare part number
For use only with computer models equipped with a dual core processor, the Intel HD6490 graphics subsystem, 1024-MB of discrete memory, and USB version 2.0	641487-001
For use only with computer models equipped with a quad core processor, a graphics subsystem with UMA memory, and USB version 3.0	641491-001
For use only with computer models equipped with a dual core processor, a graphics subsystem with UMA memory, and USB version 3.0	641485-001
For use only with computer models equipped with a dual core processor, a graphics subsystem with UMA memory, and USB version 2.0	641490-001

Before removing the system board, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - WLAN module (see WLAN module on page 58)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)


When replacing the system board, be sure that the following components are removed from the defective system board and installed on the replacement system board:

- RTC battery (see <u>RTC battery on page 56</u>)
- Memory module (see <u>Memory module on page 57</u>)
- Fan and heat sink (see Fan/heat sink assembly on page 82)
- Processor (see <u>Processor on page 86</u>)


Remove the system board:

- 1. Close the computer.
- Turn the computer upside down, with the font toward you.


3. Disconnect the speaker cable (1) and the optical drive connector cable (2) from the system board.

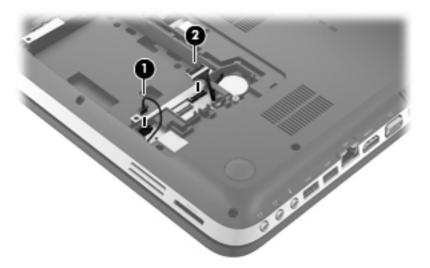


- 4. Turn the computer right side up, with the front toward you.
- 5. Open the computer.
- **6.** Disconnect the following cables from the system board:
 - Display panel cable (1)
 - Webcam/microphone cable (2)
 - Bluetooth module cable (3)
 - USB board cable (4)
 - Power connector cable **(5)**

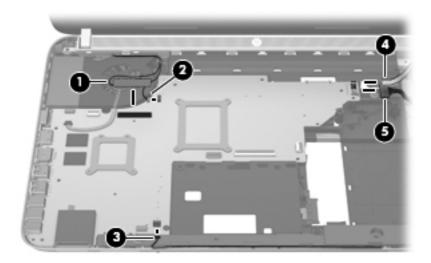

7. Remove the Phillips PM2.5×4.0 screw (1) and the two Phillips PM2.5×5.0 screws (2) that secure the system board to the base enclosure.

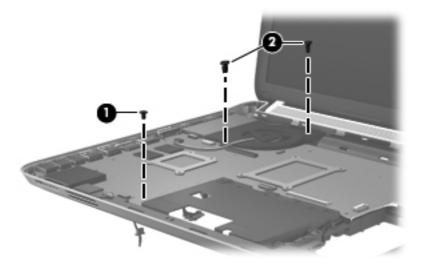

- 8. Flex the left side of the base enclosure (1) outward to provide clearance for the audio connectors (2) and the other connectors on the left side of the system board.
- 9. Lift the front edge of the system board (3) until it rests at an angle.
- 10. Remove the system board (4) by sliding it up and forward at an angle.

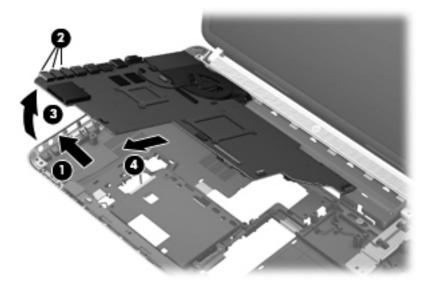

Reverse this procedure to install the system board.

Fan/heat sink assembly

- NOTE: The fan/heat sink assembly spare part kit includes replacement thermal material.

 Replacement thermal material is also available in the Thermal Material Kit, using the following spare part numbers:
 - 640457-001 For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory
 - 640456-001 For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory
 - 650801-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with 2048-MB of discrete memory
 - 641493-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with 1024-MB of discrete memory
 - 641492-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with UMA memory

Description	Spare part number
For use only with computer models equipped with an AMD processor:	
For use only with computer models equipped with a graphics subsystem with discrete memory	640426-001
For use only with computer models equipped with a graphics subsystem with UMA memory	640425-001
For use only with computer models equipped with an Intel processor:	
For use only with computer models equipped with a graphics subsystem with 2048-MB discrete memory	650797-001
For use only with computer models equipped with a graphics subsystem with 1024-MB discrete memory	641477-001
For use only with computer models equipped with a graphics subsystem with UMA memory	641476-001

NOTE: To properly ventilate the computer, allow at least 7.6 cm (3 in) of clearance on the left side of the computer. the computer uses an electric fan for ventilation. The fan is controlled by a temperature sensor and is designed to turn on automatically when high temperature conditions exist. These conditions are affected by high external temperatures, system power consumption, power management/battery conservation configurations, battery fast charging, and software requirements. Exhaust air is displaced through the ventilation grill located on the left side of the computer.


Before removing the fan/heat sink assembly, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- Disconnect all external devices connected to the computer.

- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see Hard drive on page 54)
 - WLAN module (see <u>WLAN module on page 58</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)
 - System board (see <u>System board on page 78</u>)

Remove the fan/heat sink assembly:


1. Disconnect the fan cable from the system board.

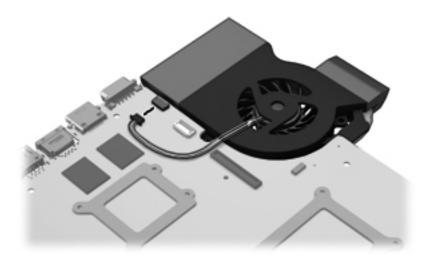


- 2. Turn the system board upside down, with the fan away from you.
- 3. Loosen the captive screws (1) that secure the fan/heat sink assembly to the system board.
- NOTE: The number of screws used to secure the fan/heat sink assembly to the system board varies by computer model.
- NOTE: Due to the adhesive quality of the thermal material located between the heat sink and system board components, it may be necessary to move the heat sink from side to side to detach it.

4. Remove the fan/heat sink assembly (2).

NOTE: The following illustration shows the fan/heat sink assembly being removed from a computer model equipped with an AMD processor and a graphics subsystem with discrete memory. A computer model equipped with an AMD processor and a graphics subsystem with UMA memory has only four screws.

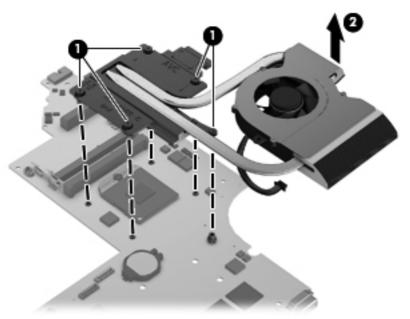


NOTE: The following illustration shows the fan/heat sink assembly being removed from a computer model equipped with an Intel processor and a graphics subsystem with discrete memory. A computer model equipped with an Intel processor and a graphics subsystem with UMA memory has only four screws.

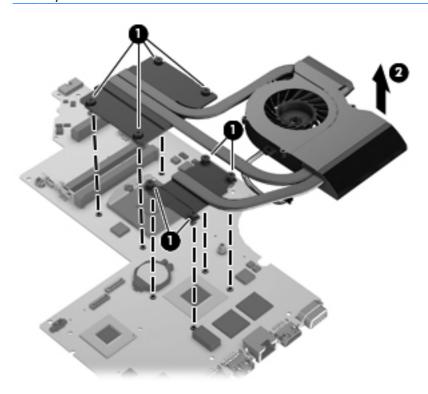

The thermal material must be thoroughly cleaned from the surfaces of the heat sink and the system board components each time the fan/heat sink assembly is removed. Replacement thermal material is included with the fan/heat sink assembly, processor, and system board spare part kits. Replacement thermal material is also available in the Thermal Material Kit.


NOTE: The following illustration shows the replacement thermal material locations on a computer model equipped with an AMD processor and a graphics subsystem with discrete memory.

- Thermal paste is used on the processor (1) and the heat sink section (2) that services it
- A thermal pad is used on the graphics subsystem chip (3) and the heat sink section (4) that services it (only on computer models equipped with a graphics subsystem with discrete memory)
- A thermal pad is used on the Northbridge chip (5) and the heat sink section (6) that services it

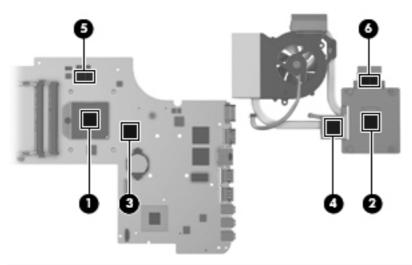

NOTE: The following illustration shows the replacement thermal material locations on a computer model equipped with an Intel processor and a graphics subsystem with discrete memory.

- Thermal paste is used on the processor (1) and the heat sink section (2) that services it
- A thermal pad is used on the graphics subsystem chip (3) and the heat sink section (4) that services it (only on computer models equipped with a graphics subsystem with discrete memory)
- A thermal pad is used on the Northbridge chip (5) and the heat sink section (6) that services it

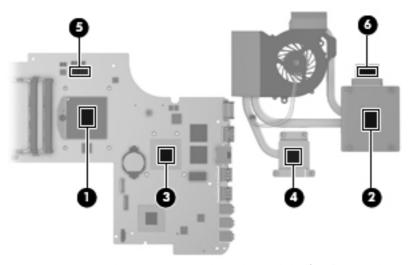

Reverse this procedure to reassemble and install the fan/heat sink assembly.

Processor

- NOTE: The processor spare part kit includes replacement thermal material.

 Replacement thermal material is also available in the Thermal Material Kit, using the following spare part numbers:
 - 640457-001 For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory
 - 640456-001 For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory
 - 650801-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with 2048-MB of discrete memory
 - 641493-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with 1024-MB of discrete memory
 - 641492-001 For use only with computer models equipped with an Intel processor and a graphics subsystem with UMA memory

Description	Spare part number
AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 35 W)	634686-001
AMD Athlon II P360 2.30-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W)	636635-001
AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz, 3.2GT/sec, dual core, 25 W)	616343-001
AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, quad core, 35 W)	635496-001
AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W)	635495-001

Description	Spare part number
AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 35 W)	616345-001
AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz, 3.6GT/sec, dual core, 35 W)	635494-001
AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, quad core, 25 W)	634689-001
AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1333-MHz, 3.6GT/sec, triple core, 25 W)	634688-001
AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, triple core, 25 W)	634687-001
AMD Turion II P570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 35 W)	634690-001
AMD Turion II P560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz, 3.6GT/sec, dual core, 25 W)	634691-001
Intel Core i7-2820M 2.30-GHz (SC turbo up to 3.10-GHz) processor (8.0-MB L3 cache, quad core, 45 W)	634694-001
Intel Core i7-2720M 2.20-GHz (SC turbo up to 3.00-GHz) processor (6.0-MB L3 cache, quad core, 45 W)	631254-001
Intel Core i7-2630M 2.00-GHz (SC turbo up to 2.90-GHz) processor (6.0-MB L3 cache, quad core, 45 W)	635501-001
Intel Core i7-2620M 2.70-GHz (SC turbo up to 3.40-GHz) processor (4.0-MB L3 cache, dual core, 35 W)	631252-001
Intel Core i5-2540M 2.60-GHz (SC turbo up to 3.30-GHz) processor (3.0-MB L3 cache, dual core, 35 W)	631255-001
Intel Core i5-2520M 2.50-GHz (SC turbo up to 3.20-GHz) processor (3.0-MB L3 cache, dual core, 35 W)	631253-001
Intel Core i5-2410M 2.30-GHz (SC turbo up to 2.90-GHz) processor (3.0-MB L3 cache, dual core, 35 W)	638039-001
Intel Core i3-2310M 2.10-GHz processor (3.0-MB L3 cache, dual core, 35 W)	638037-001

Before removing the processor, follow these steps:


- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.

- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - WLAN module (see <u>WLAN module on page 58</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)
 - System board (see <u>System board on page 78</u>)
 - Fan/heat sink assembly (see <u>Fan/heat sink assembly on page 82</u>)


Remove the processor:

1. Use a flat-bladed screw driver to turn the processor locking screw one-half turn counterclockwise (1), until you hear a click.

- 2. Lift the processor (2) straight up, and remove it.
- NOTE: The gold triangle (3) on the processor must be aligned with the triangle icon embossed on the processor socket when you install the processor.
- NOTE: The following illustration shows the processor removal process on a computer model equipped with an AMD processor.

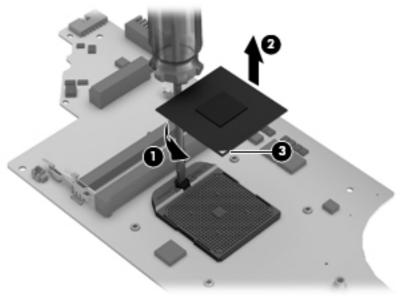

NOTE: The following illustration shows the processor removal process on a computer model equipped with an Intel processor.

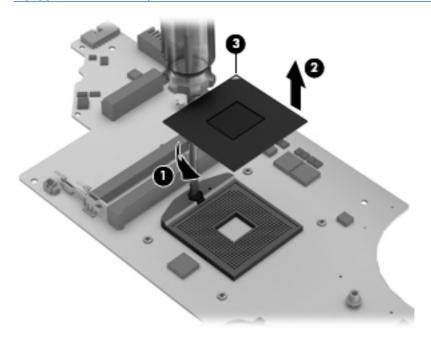

Reverse this procedure to install the processor.

Speakers

Description	Spare part number
Speaker cover:	
For use only with computer models in dark umber and steel gray finish	641438-001
For use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish	640443-001
Speaker Kit (includes left and right speakers and cable)	640449-001


Before removing the speakers, follow these steps:

- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see Optical drive on page 51)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see Keyboard on page 61)
 - Top cover (see <u>Top cover on page 65</u>)
 - System board (see <u>System board on page 78</u>)


Remove the speakers:

- 1. Close the computer.
- 2. Turn the computer upside down, with the front toward you.

3. Release the rear speaker cable (1) from the clips (2) and routing channel built into the base enclosure.

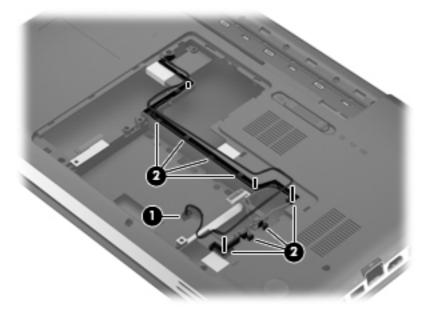


4. Remove the four Phillips PM2.5×4.0 screws **(1)** and the PM2.5×10.0 screw **(2)** that secure the rear speaker to the computer.

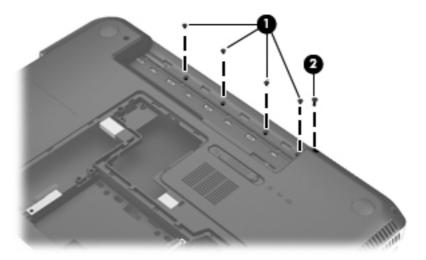


- 5. Turn the computer right side up, with the front toward you.
- **6.** Open the computer.
- 7. Release the rear speaker cable (1) from the opening in the base enclosure and the clips (2) and (3) built into the base enclosure.

8. Remove the rear speaker (4) and cable.

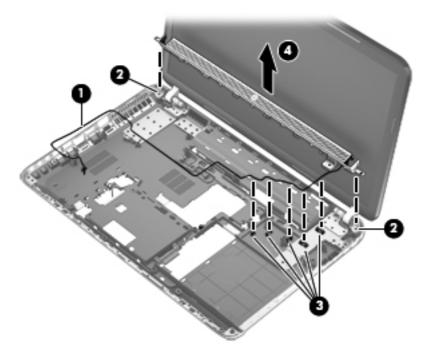

- 9. Remove the Phillips PM2.5×4.0 screw (1) that secures the front speaker to the base enclosure.
- 10. Remove the front speaker (2).
- NOTE: When removing the front speaker, note the installation locations of two isolators (3).

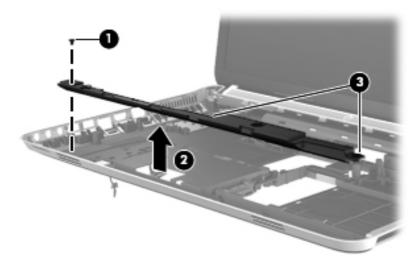

Reverse this procedure to install the speakers.

Optical drive connector cable


NOTE: The optical drive connector cable is included in the Cable Kit, spare part number 640422-001. The optical drive connector cable includes the optical drive connector.

Before removing the optical drive connector cable, follow these steps:


- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see <u>Battery on page 50</u>), and then remove the following components:
 - Optical drive (see <u>Optical drive on page 51</u>)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)
 - System board (see <u>System board on page 78</u>)

Remove the optical drive connector cable:

- 1. Close the computer.
- 2. Turn the computer upside down, with the front toward you.
- Release the optical drive connector cable (1) from the clips (2) and routing channel built into the base enclosure.

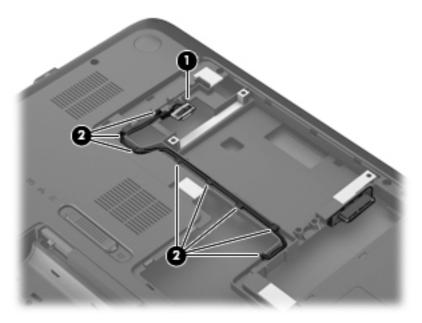

- 4. Turn the computer right side up, with the front toward you.
- Open the computer.
- 6. Release the optical drive connector cable from the clips (1) built into the base enclosure.
- **7.** Remove the two Phillips PM2.0×7.0 screws **(1)** that secure the optical drive connector to the base enclosure.
- 8. Remove the optical drive connector cable (3).

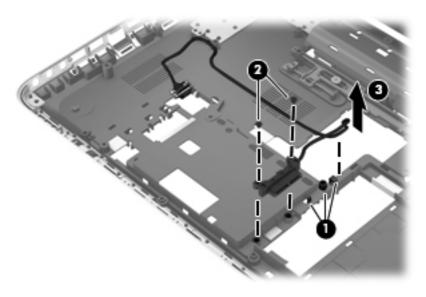

Reverse this procedure to install the optical drive connector cable.

Display assembly

NOTE: The display assembly includes a webcam, two microphones, and wireless antenna transceivers and cables.


Description	Spare part number
15.6-in, HD, LED, BrightView display assembly	
In butter gold finish	641482-001
In dark umber finish	640431-001
In espresso black finish	640430-001
In linen white finish	640433-001
In Pacific blue finish	641479-001
In pearl pink finish	641481-001
In ruby red finish	640434-001
In Sonoma red finish	641480-001
In steel gray finish	650798-001

Before removing the display assembly, follow these steps:


- 1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect all external devices connected to the computer.
- 3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
- 4. Remove the battery (see Battery on page 50), and then remove the following components:
 - Optical drive (see <u>Optical drive on page 51</u>)
 - Hard drive (see <u>Hard drive on page 54</u>)
 - WLAN module (see <u>WLAN module on page 58</u>)
 - Keyboard (see <u>Keyboard on page 61</u>)
 - Top cover (see <u>Top cover on page 65</u>)
 - System board (see <u>System board on page 78</u>)

Remove the display assembly:


- 1. Release the wireless antenna cables from the clips (1) and the opening in the base enclosure.
- CAUTION: Support the display assembly when removing the following screws. Failure to support the display assembly can result in damage to the display assembly and other computer components.
- 2. Remove the six Phillips PM2.5 \times 5.0 screws (2) that secure the display assembly to the computer.
 - NOTE: The left-most screw on the left hinge secures a display panel cable ground loop (3).
- 3. Remove the display assembly (4).

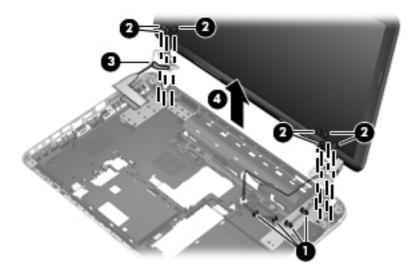


- 4. If it is necessary to replace the display bezel or any of the display assembly subcomponents:
 - **a.** Remove the two screw covers **(1)** and the two Phillips PM2.5×5.0 screws **(2)** that secure the display bezel to the display assembly. (The screw covers are available in the Display Rubber Kit, spare part number 641810-001.)

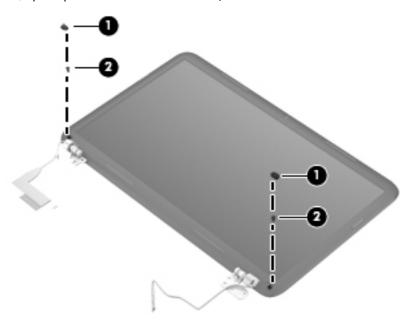

- **b.** Flex the inside edges of the top edge (1), the left and right sides (2), and the bottom edge (3) of the display bezel until the bezel disengages from the display enclosure.
- **c.** Remove the display bezel **(4)**. The display bezel is available using spare part numbers 640421-001 (for use only with computer models in dark umber and steel gray finish) and 640420-001 (for use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish).

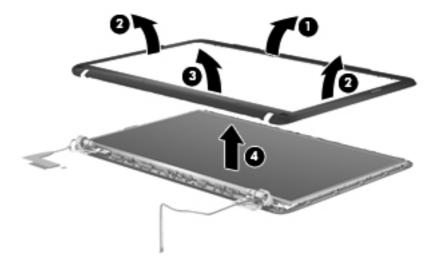


- 5. If it is necessary to replace the webcam/microphone module:
 - **a.** Detach and release the webcam/microphone module **(1)** as far as the webcam/microphone module cable allows. (The webcam/microphone module is attached to the display enclosure with double-sided tape.)
 - **b.** Disconnect the webcam/microphone module (2) from the webcam/microphone module.
 - **c.** Remove the webcam/microphone module **(3)**. The webcam/microphone module is available using spare part number 639387-001.

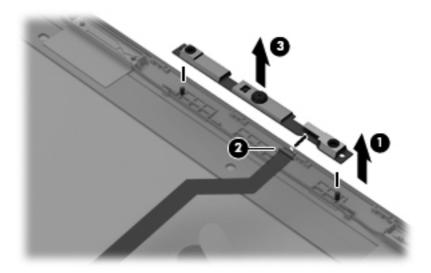


- **6.** If it is necessary to replace the hinge covers:
 - **a.** Remove the two Phillips PM2.0×3.0 **(1)** screws that secure the hinge covers to the display enclosure.


b. Remove the hinge covers **(2)**. The hinge covers are available using spare part number 641807-001.

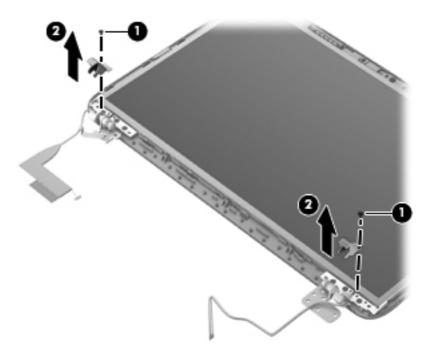


- 7. If it is necessary to replace the display panel:
 - **a.** Remove the two Phillips PM2.5×3.5 **(1)** screws and the six Phillips PM2.5×5.0 screws **(2)** that secure the display panel to the display enclosure.

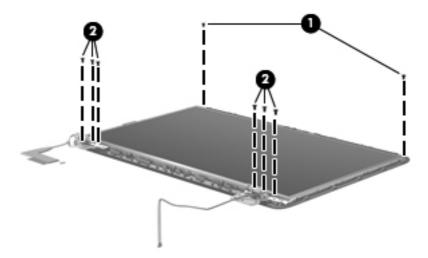

b. Lift the top edge of the display panel (1), and then swing it forward (2) until it rests upside down in front of the display enclosure.

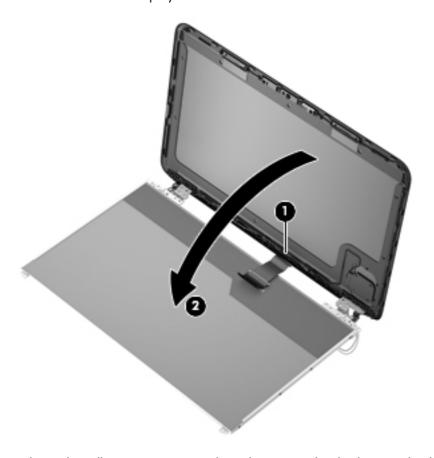


c. Release the adhesive strips (1) and (2) that secure the display panel cable to the display panel, and then disconnect the display panel cable (3) from the display panel.

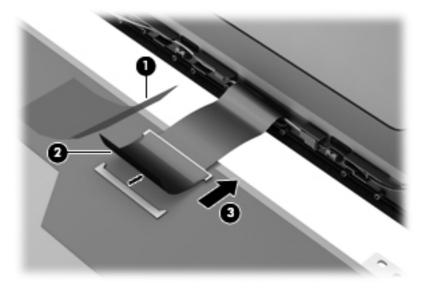


d. Remove the display panel. The display panel is available using spare part number 640445-001.

- 8. If it is necessary to replace the display hinges:
 - **a.** Remove the eight Phillips PM2.0×2.0 screws **(1)** that secure the display hinges to the display panel.
 - **b.** Remove the display hinges (2). The display hinges include the display hinges and brackets and are available using spare part number 640429-001.

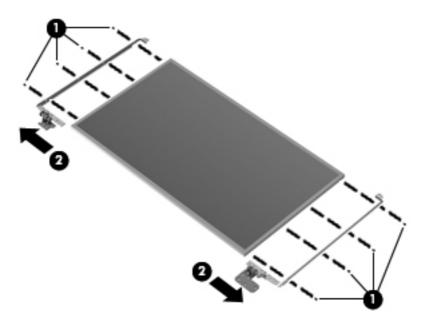


- **9.** If it is necessary to replace the display panel cable:
 - **a.** Release the tabs **(1)** built into the display enclosure shielding that secure the display panel cable to the display enclosure.
 - **b.** Release the display panel cable from the clips (2) built into the display enclosure.

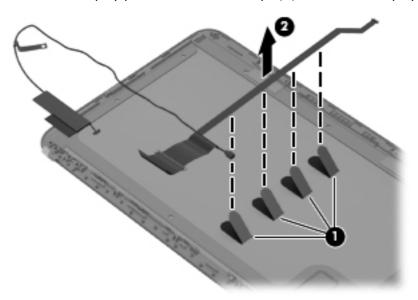

c. Remove the display panel cable. The display panel cable includes the webcam/microphone module cable and is available in the Display Cable Kit, spare part numbers 644362-001 (for

use only with computer models in dark umber and steel gray finish) and 640423-001 (for use only with computer models in butter gold, espresso black, linen white, Pacific blue, pearl pink, ruby red, and Sonoma red finish).

- 10. If it is necessary to replace the wireless antenna cables and transceivers:
 - **a.** Release the wireless antenna transceivers **(1)** from the display enclosure. (The wireless antenna transceivers are attached to the display enclosure with double-sided tape.)
 - **b.** Release the wireless antenna cables from the clips (2) built into the display enclosure.
 - **c.** Remove the wireless antenna cables and transceivers **(3)**. The wireless antenna cables and transceivers are available in the Antenna Kit, spare part number 640411-001.

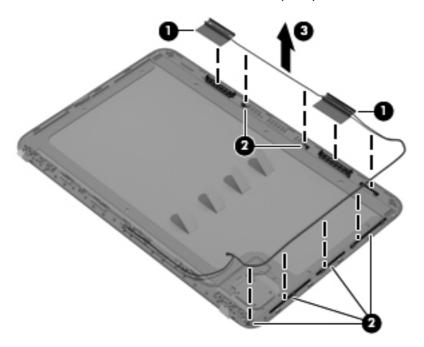

Reverse this procedure to reassemble and install the display assembly.

5 Setup Utility (BIOS) and System Diagnostics

Using Setup Utility

Setup Utility, or Basic Input/Output System (BIOS), controls communication between all the input and output devices on the system (such as disk drives, display, keyboard, mouse, and printer). Setup Utility includes settings for the types of peripherals installed, the startup sequence of the computer, and the amount of system and extended memory.

NOTE: Use extreme care when making changes in Setup Utility. Errors can prevent the computer from operating properly.

Starting Setup Utility

NOTE: An external keyboard or mouse connected to a USB port can be used with Setup Utility only if USB legacy support is enabled.

To start Setup Utility, follow these steps:

- Turn on or restart the computer, and then press esc while the "Press the ESC key for Startup Menu" message is displayed at the bottom of the screen.
- 2. Press f10 to enter Setup Utility.

Changing the language of Setup Utility

- 1. Start Setup Utility.
- 2. Use the arrow keys to select **System Configuration > Language**, and then press enter.
- 3. Use the arrow keys to select a language, and then press enter.
- 4. When a confirmation prompt with your language selected is displayed, press enter.
- 5. To save your change and exit Setup Utility, use the arrow keys to select **Exit > Exit Saving**Changes, and then press enter.

Your change takes effect immediately.

Navigating and selecting in Setup Utility

To navigate and select in Setup Utility, follow these steps:

- Turn on or restart the computer, and then press esc while the "Press the ESC key for Startup Menu" message is displayed at the bottom of the screen.
 - To select a menu or a menu item, use the tab key and the keyboard arrow keys and then press enter, or use a pointing device to click the item.
 - To scroll up and down, click the up arrow or the down arrow in the upper-right corner of the screen, or use the up arrow key or the down arrow key.
 - To close open dialog boxes and return to the main Setup Utility screen, press esc, and then follow the on-screen instructions.
- NOTE: You can use either a pointing device (TouchPad, pointing stick, or USB mouse) or the keyboard to navigate and make selections in Setup Utility.
- 2. Press f10 to enter Setup Utility.

To exit Setup Utility menus, choose one of the following methods:

To exit Setup Utility menus without saving your changes, click the **Exit** icon in the lower-left corner
of the screen, and then follow the on-screen instructions.

– or –

Use the tab key and the arrow keys to select **File > Ignore Changes and Exit**, and then press enter.

 To save your changes and exit Setup Utility menus, click the Save icon in the lower-left corner of the screen, and then follow the on-screen instructions.

- or -

Use the tab key and the arrow keys to select **File > Save Changes and Exit**, and then press enter.

Your changes go into effect when the computer restarts.

Displaying system information

- Start Setup Utility.
- 2. Select the **Main** menu. System information such as the system time and date, and identification information about the computer is displayed.
- To exit Setup Utility without changing any settings, use the arrow keys to select Exit > Exit Discarding Changes, and then press enter.

Restoring factory settings in Setup Utility

NOTE: Restoring defaults will not change the hard drive mode.

To return all settings in Setup Utility to the values that were set at the factory, follow these steps:

- Turn on or restart the computer, and then press esc while the "Press the ESC key for Startup Menu" message is displayed at the bottom of the screen.
- Press f10 to enter Setup Utility.
- 3. Use a pointing device or the arrow keys to select **File > Restore Defaults**.
- 4. Follow the on-screen instructions.
- To save your changes and exit, click the Save icon in the lower-left corner of the screen, and then follow the on-screen instructions.

– or –

Use the arrow keys to select **File > Save Changes and Exit**, and then press enter.

Your changes go into effect when the computer restarts.

NOTE: Your password settings and security settings are not changed when you restore the factory settings.

Exiting Setup Utility

- To exit Setup Utility and save your changes from the current session:
 - If the Setup Utility menus are not visible, press esc to return to the menu display. Then use the arrow keys to select **Exit > Exit Saving Changes**, and then press enter.
- To exit Setup Utility without saving your changes from the current session:
 - If the Setup Utility menus are not visible, press esc to return to the menu display. Then use the arrow keys to select **Exit > Exit Discarding Changes**, and then press enter.

Updating the BIOS

Updated versions of the BIOS may be available on the HP Web site.

Most BIOS updates on the HP Web site are packaged in compressed files called SoftPags.

Some download packages contain a file named Readme.txt, which contains information regarding installing and troubleshooting the file.

Determining the BIOS version

To determine whether available BIOS updates contain later BIOS versions than those currently installed on the computer, you need to know the version of the system BIOS currently installed.

BIOS version information (also known as ROM date and System BIOS) can be displayed by pressing fn +esc (if you are already in Windows) or by using Setup Utility.

- 1. Start Setup Utility.
- Use a pointing device or the arrow keys to select File > System Information.
- To exit Setup Utility without saving your changes, click the Exit icon in the lower-left corner of the screen, and then follow the on-screen instructions.

– or –

Use the tab key and the arrow keys to select **File > Ignore Changes and Exit**, and then press enter.

Downloading a BIOS update

⚠ CAUTION: To reduce the risk of damage to the computer or an unsuccessful installation, download and install a BIOS update only when the computer is connected to reliable external power using the AC adapter. Do not download or install a BIOS update while the computer is running on battery power, docked in an optional docking device, or connected to an optional power source. During the download and installation, follow these instructions:

Do not disconnect power from the computer by unplugging the power cord from the AC outlet.

Do not shut down the computer or initiate Sleep or Hibernation.

Do not insert, remove, connect, or disconnect any device, cable, or cord.

1. Windows 7—Select Start > Help and Support > Maintain.

Windows XP—Select **Start > Help and Support**, and then select the software and drivers update.

- Follow the on-screen instructions to identify your computer and access the BIOS update you want to download.
- 3. At the download area, follow these steps:
 - **a.** Identify the BIOS update that is later than the BIOS version currently installed on your computer. Make a note of the date, name, or other identifier. You may need this information to locate the update later, after it has been downloaded to your hard drive.
 - **b.** Follow the on-screen instructions to download your selection to the hard drive. Make a note of the path to the location on your hard drive where the BIOS update is downloaded. You will need to access this path when you are ready to install the update.
 - NOTE: If you connect your computer to a network, consult the network administrator before installing any software updates, especially system BIOS updates.

BIOS installation procedures vary. Follow any instructions that are displayed on the screen after the download is complete. If no instructions are displayed, follow these steps:

- Windows 7—Open Windows Explorer by selecting Start > Computer.
 - **Windows XP**—Open Windows Explorer by selecting **Start > My Computer**.
- 2. Double-click your hard drive designation. The hard drive designation is typically Local Disk (C:).
- Using the hard drive path you recorded earlier, open the folder on your hard drive that contains the update.
- Double-click the file that has an .exe extension (for example, filename.exe).
 The BIOS installation begins.
- **5.** Complete the installation by following the on-screen instructions.
- NOTE: After a message on the screen reports a successful installation, you can delete the downloaded file from your hard drive.

Using System Diagnostics

System Diagnostics allows you to run diagnostic tests to determine if the computer hardware is functioning properly. The following diagnostic tests are available in System Diagnostics:

- Start-up test—This test analyzes the main computer components that are required to start the computer.
- Run-in test—This test repeats the start-up test and checks for intermittent problems that the start-up test does not detect.
- Hard disk test—This test analyzes the physical condition of the hard drive, and then checks all
 data in every sector of the hard drive. If the test detects a damaged sector, it attempts to move the
 data to a good sector.
- Memory test—This test analyzes the physical condition of the memory modules. If it reports an
 error, replace the memory modules immediately.
- Battery test—This test analyzes the condition of the battery. If the battery fails the test, contact HP support to report the issue and purchase a replacement battery.

You can also view system information and error logs in the System Diagnostics window.

To start System Diagnostics:

- Turn on or restart the computer. While the "Press the ESC key for Startup Menu" message is displayed in the lower-left corner of the screen, press esc. When the Startup Menu is displayed, press f2.
- 2. Click the diagnostic test you want to run, and then follow the on-screen instructions.
- NOTE: If you need to stop a diagnostics test while it is running, press esc.

6 Specifications

Computer specifications

	Metric	U.S.	
Dimensions			
Depth	24.7 cm	9.72 in	
Width	37.8 cm	14.88 in	
Height (front to back)	3.1 to 3.5 cm	1.23 to 1.39 in	
Weight	2.91 kg	6.42 lb	
Input power			
Operating voltage		18.5 V dc @ 3.5 A – 65 W; 19 V dc @ 4.74 A – 90 W; or 18.5 V dc @ 6.5 A – 120 W	
Operating current	3.5, 4.74, or 6.5 A		
Temperature			
Operating	5°C to 35°C	41°F to 95°F	
Nonoperating	-20°C to 60°C	-4°F to 140°F	
Relative humidity (noncondensing)			
Operating	10% to 90%		
Nonoperating	5% to 95%		
Maximum altitude (unpressurized)			
Operating	-15 m to 3,048 m	-50 ft to 10,000 ft	
	-15 m to 12,192 m	-50 ft to 40,000 ft	

15.6-inch display specifications

	Metric	U.S.
Dimensions		
Height	19.6 cm	7.72 in
Width	34.7 cm	13.66 in
Diagonal	39.8 cm	15.67 in
Number of colors	Up to 16.8 million	
Contrast ratio	200:1 (typical)	
Brightness	200 nits (typical)	
Pixel resolution		
Pitch	0.197 × 0.197 mm	
Format	1366 × 768	
Configuration	RGB vertical stripe	
Backlight	LED	
Character display	80 × 25	
Total power consumption	2.0 W	
Viewing angle	±65° horizontal, ±50° vertical (t	ypical)

Hard drive specifications

	1-TB*	750-GB**	640-GB**
Dimensions			
Height	12.7 mm	9.5 mm	9.5 mm
Length	100.2 mm	100.2 mm	100.2 mm
Width	69.9 mm	69.9 mm	69.9 mm
Weight	152 g	110 g	98 g
Interface type	SATA (3 GB/sec)	SATA (3 GB/sec)	SATA
Transfer rate			
Synchronous (maximum)	97 MB/sec	97 MB/sec	106 MB/sec
Security	ATA security	ATA security	ATA security
Seek times (typical read, including setting)			
Single track	2.0 ms	2.0 ms	1.5 ms
Average (read/write)	12/16 ms	12/16 ms	12/13 ms
Maximum	21 ms	21 ms	24 ms
Logical blocks	1,953,525, 168	1,465,149,168	1,250,263,728
Disk rotational speed	5400 RPM	7200 and 5400 rpm	7200 rpm
Operating temperature	0°C to 60°C (32°F to 140°F)		

^{*1} TB = 1 trillion bytes when referring to hard drive storage capacity. Actual accessible capacity is less.

NOTE: Certain restrictions and exclusions apply. Contact technical support for details.

^{**1} GB = 1 billion bytes when referring to hard drive storage capacity. Actual accessible capacity is less.

Hard drive specifications (continued)

	500-GB*	320-GB*	250-GB*	
Dimensions				
Height	9.5 mm	7.0 mm	7.0 mm	
Length	100.4 mm	100.4 mm	100.4 mm	
Width	69.9 mm	69.9 mm	69.9 mm	
Weight	110 g	110 g	105 g	
Interface type	SATA	SATA	SATA	
Transfer rate				
Synchronous (maximum)	1.1 GB/sec	1.1 GB/sec	1.1 GB/sec	
Security	ATA security	ATA security	ATA security	
Seek times (typical read, including setting)				
Single track	1.5 ms	1.5 ms	1.5 ms	
Average (read/write)	11/13 ms	11/13 ms	11/13 ms	
Maximum	22 ms	22 ms	22 ms	
Logical blocks	976,773,168	628,142,448	488,397,168	
Disk rotational speed	7200 rpm	7200 rpm	7200 rpm	
Operating temperature		0°C to 60°C (32°F to 140°F)		
*1 GB = 1 billion bytes when referring to har	d drive storage capacity. Actua	al accessible capacity is	less.	

NOTE: Certain restrictions and exclusions apply. Contact technical support for details.

7 Backup and recovery

Your computer includes tools provided by the operating system and HP to help you safeguard your information and restore it if ever needed.

This chapter provides information on the following topics:


- Creating a set of recovery discs or a recovery flash drive (Recovery Manager software feature)
- Performing a system restore (from the partition, recovery discs, or a recovery flash drive)
- Backing up your information
- Recovering a program or driver

Restore

In the event of hard drive failure, to restore your system to its factory image you will need a set of recovery discs or a recovery flash drive that you can create using HP Recovery Manager. HP recommends that you use this software to create either a set of recovery discs or a recovery flash drive immediately after software setup.

If for some other reason you need to restore your system, this can be achieved using the HP Recovery partition (select models only), without the need for recovery discs or a recovery flash drive. To check for the presence of a recovery partition, click **Start**, right-click **Computer**, click **Manage**, and then click **Disk Management**. If the recovery partition is present, a Recovery drive is listed in the window.

<u>CAUTION:</u> HP Recovery Manager (partition, or discs/flash drive) restores only software that was preinstalled at the factory. Software not provided with this computer must be reinstalled manually.



Creating restore media

HP recommends that you create either a set of recovery discs or a recovery flash drive to be sure that you can restore your computer to its original factory state if the hard drive fails, or if for any reason you cannot restore using the recovery partition tools. Create these discs or the flash drive after setting up the computer for the first time.

- NOTE: HP Recovery Manager allows the creation of only one set of recovery discs or one recovery flash drive. Handle these discs or flash drive carefully and keep them in a safe place.
- NOTE: If your computer does not include an integrated optical drive, you can use an optional external optical drive (purchased separately) to create recovery discs, or you can purchase recovery discs for your computer from the HP Web site. If you use an external optical drive, it must be connected directly to a USB port on the computer, not to a USB port on an external device, such as a USB hub.

Guidelines:

- Purchase high-quality DVD-R, DVD+R, DVD-R DL, or DVD+R DL discs.
 - NOTE: Read-write discs, such as CD-RW, DVD±RW, double-layer DVD±RW, and BD-RE (rewritable Blu-ray) discs, are not compatible with the Recovery Manager software.
- the computer must be connected to AC power during this process.
- Only one set of recovery discs or one recovery flash drive can be created per computer.
- NOTE: If you are creating recovery discs, number each disc before inserting into the optical drive.
- If necessary, you can exit the program before you have finished creating the recovery discs or recovery flash drive. The next time you open Recovery Manager, you will be prompted to continue the backup creation process.

To create a set of recovery discs or a recovery flash drive:

- Select Start > All Programs > Recovery Manager > Recovery Media Creation.
- Follow the on-screen instructions.

Performing a system restore

Recovery Manager software allows you to repair or restore the computer to its original factory state. Recovery Manager works from recovery discs, a recovery flash drive, or from a dedicated recovery partition (select models only) on the hard drive.

NOTE: A system restore needs to be performed if the computer hard drive has failed or if all attempts to correct any functional computer issues fail.

A system restore should be used as a final attempt to correct computer issues. Note the following when performing a system restore:

- You can restore only the system that you have previously backed up. HP recommends that you use
 HP Recovery Manager to create either a set of recovery discs or a recovery flash drive as soon as
 you set up the computer.
- Windows has its own built-in repair features, such as System Restore. If you have not already tried these features, try them before using Recovery Manager.
- Recovery Manager restores only software that was preinstalled at the factory. Software not
 provided with this computer must be downloaded from the manufacturer's Web site or reinstalled
 from the disc provided by the manufacturer.

Restoring using the dedicated recovery partition (select models only)

When using the dedicated recovery partition, there is an option to back up pictures, music and other audio, videos and movies, recorded TV shows, documents, spreadsheets and presentations, e-mails, Internet favorites and settings during this process.

To restore the computer from the recovery partition, follow these steps:

- 1. Access Recovery Manager in either of the following ways:
 - Select Start > All Programs > Recovery Manager > Recovery Manager.
 - or -
 - Turn on or restart the computer, and then press esc while the "Press the ESC key for Startup Menu" message is displayed at the bottom of the screen. Then, press f11 while the "F11 (System Recovery)" message is displayed on the screen.
- Click System Recovery in the Recovery Manager window.
- Follow the on-screen instructions.

Restoring using the restore media

- If possible, back up all personal files.
- 2. Insert the first recovery disc into the optical drive on your computer or an optional external optical drive, and then restart the computer.

- or -

Insert the recovery flash drive into a USB port on your computer, and then restart the computer.

- NOTE: If the computer does not automatically restart in the Recovery Manager, the computer boot order needs to be changed.
- 3. Press f9 at system bootup.
- 4. Select the optical drive or the flash drive.
- Follow the on-screen instructions.

Changing the computer boot order

To change the boot order for recovery discs:

- Restart the computer.
- 2. Press esc while the computer is restarting, and then press f9 for boot options.
- 3. Select Internal CD/DVD ROM Drive from the boot options window.

To change the boot order for recovery flash drive:

- 1. Insert the flash drive into a USB port.
- 2. Restart the computer.
- 3. Press esc while the computer is restarting, and then press f9 for boot options.
- 4. Select the flash drive from the boot options window.

Backing up and recovering your information

It is very important to back up your files and keep any new software in a safe place. As you add new software and data files, continue to create backups on a regular basis.

How completely you are able to recover your system depends on how recent your backup is.

NOTE: A recovery from your most recent backup needs to be performed if the computer has a virus attack or if any major system components fail. In order to correct computer issues, a recovery should first be attempted before a system restore is attempted.

You can back up your information to an optional external hard drive, a network drive, or discs. Back up your system at the following times:

- At regularly scheduled times
- TIP: Set reminders to back up your information periodically.
- Before the computer is repaired or restored
- Before you add or modify hardware or software

Guidelines:

- Create system restore points using the Windows System Restore feature, and periodically copy
 them to an optical disc or an external hard drive. For more information on using system restore
 points, refer to **Using Windows system restore points**.
- Store personal files in the Documents library and back up this folder periodically.
- Save customized settings in a window, toolbar, or menu bar by taking a screen shot of your settings. the screen shot can be a time-saver if you have to re-enter your preferences.

To create a screen shot:

- 1. Display the screen you want to save.
- 2. Copy the screen image:

To copy only the active window, press alt+fn+prt sc.

To copy the entire screen, press fn+prt sc.

- Open a word-processing document, and then select Edit > Paste. the screen image is added to the document.
- 4. Save and print the document.


Using Windows Backup and Restore

Guidelines:

- Be sure that the computer is connected to AC power before you start the backup process.
- Allow enough time to complete the backup process. Depending on file sizes, it may take over an hour.

To create a backup:

- Select Start > Control Panel > System and Security > Backup and Restore.
- 2. Follow the on-screen instructions to schedule and create a backup.



Using Windows system restore points

A system restore point allows you to save and name a snapshot of your hard drive at a specific point in time. You can then recover back to that point if you want to reverse subsequent changes.

NOTE: Recovering to an earlier restore point does not affect data files saved or e-mails created since the last restore point.

You also can create additional restore points to provide increased protection for your files and settings.

When to create restore points

- Before you add or modify software or hardware
- Periodically, whenever the computer is functioning optimally
- NOTE: If you revert to a restore point and then change your mind, you can reverse the restoration.

Create a system restore point

- 1. Select Start > Control Panel > System and Security > System.
- 2. In the left pane, click **System Protection**.
- 3. Click the **System Protection** tab.
- 4. Follow the on-screen instructions.

Restore to a previous date and time

To revert to a restore point (created at a previous date and time), when the computer was functioning optimally, follow these steps:

- Select Start > Control Panel > System and Security > System.
- 2. In the left pane, click **System Protection**.
- 3. Click the System Protection tab.
- 4. Click System Restore.
- 5. Follow the on-screen instructions.

8 Power cord set requirements

The wide-range input feature of the computer permits it to operate from any line voltage from 100 to 120 volts AC, or from 220 to 240 volts AC.

The 3-conductor power cord set included with the computer meets the requirements for use in the country or region where the equipment is purchased.

Power cord sets for use in other countries and regions must meet the requirements of the country or region where the computer is used.

Requirements for all countries

The following requirements are applicable to all countries and regions:

- The length of the power cord set must be at least **1.5 m** (5.0 ft) and no more than **2.0 m** (6.5 ft).
- All power cord sets must be approved by an acceptable accredited agency responsible for evaluation in the country or region where the power cord set will be used.
- The power cord sets must have a minimum current capacity of 10 amps and a nominal voltage rating of 125 or 250 V AC, as required by the power system of each country or region.
- The appliance coupler must meet the mechanical configuration of an EN 60 320/IEC 320
 Standard Sheet C13 connector for mating with the appliance inlet on the back of the computer.

Requirements for specific countries and regions

Country/region	Accredited agency	Applicable note number
Australia	EANSW	1
Austria	OVE	1
Belgium	CEBC	1
Canada	CSA	2
Denmark	DEMKO	1
Finland	FIMKO	1
France	UTE	1
Germany	VDE	1
Italy	IMQ	1
Japan	METI	3
The Netherlands	KEMA	1
Norway	NEMKO	1
The People's Republic of China	COC	5
South Korea	EK	4
Sweden	SEMKO	1
Switzerland	SEV	1
Taiwan	BSMI	4
The United Kingdom	BSI	1
The United States	UL	2

- The flexible cord must be Type HO5VV-F, 3-conductor, 1.0-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
- 2. The flexible cord must be Type SPT-3 or equivalent, No. 18 AWG, 3-conductor. The wall plug must be a two-pole grounding type with a NEMA 5-15P (15 A, 125 V) or NEMA 6-15P (15 A, 250 V) configuration.
- 3. The appliance coupler, flexible cord, and wall plug must bear a "T" mark and registration number in accordance with the Japanese Dentori Law. The flexible cord must be Type VCT or VCTF, 3-conductor, 1.00-mm² conductor size. The wall plug must be a two-pole grounding type with a Japanese Industrial Standard C8303 (7 A, 125 V) configuration.
- 4. The flexible cord must be Type RVV, 3-conductor, 0.75-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
- 5. The flexible cord must be Type VCTF, 3-conductor, 0.75-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.

9 Recycling

Battery

When a battery has reached the end of its useful life, do not dispose of the battery in general household waste. Follow the local laws and regulations in your area for computer battery disposal.

Display

- **WARNING!** The backlight contains mercury. Caution must be exercised when removing and handling the backlight to avoid damaging this component and causing exposure to the mercury.
- ⚠ CAUTION: The procedures in this chapter can result in damage to display components. The only components intended for recycling purposes are the liquid crystal display (LCD) panel and the backlight. When you remove these components, handle them carefully.
- NOTE: Materials Disposal. This HP product contains mercury in the backlight in the display assembly that might require special handling at end-of-life. Disposal of mercury may be regulated because of environmental considerations. For disposal or recycling information, contact your local authorities, or see the Electronic Industries Alliance (EIA) Web site at http://www.eiai.org.


This section provides disassembly instructions for the display assembly. The display assembly must be disassembled to gain access to the backlight (1) and the liquid crystal display (LCD) panel (2).




NOTE: The procedures provided in this chapter are general disassembly instructions. Specific details, such as screw sizes, quantities, and locations, and component shapes and sizes, can vary from one computer model to another.

Perform the following steps:


1. Remove all screw covers (1) and screws (2) that secure the display bezel to the display assembly.

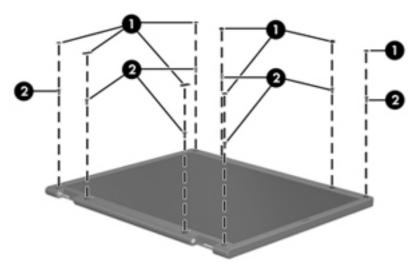


- 2. Lift up and out on the left and right inside edges (1) and the top and bottom inside edges (2) of the display bezel until the bezel disengages from the display assembly.
- 3. Remove the display bezel (3).

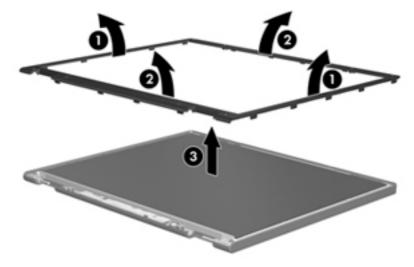


4. Disconnect all display panel cables (1) from the display inverter and remove the inverter (2).

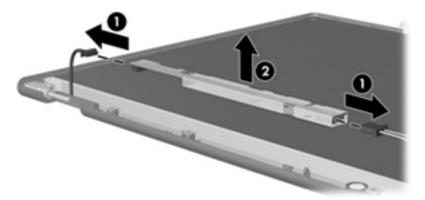

- 5. Remove all screws (1) that secure the display panel assembly to the display enclosure.
- 6. Remove the display panel assembly (2) from the display enclosure.

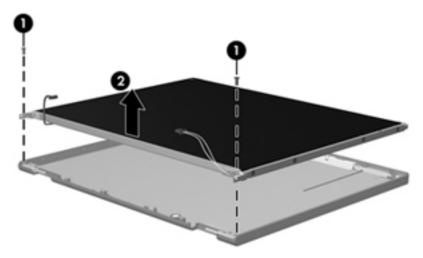


- 7. Turn the display panel assembly upside down.
- 8. Remove all screws that secure the display panel frame to the display panel.

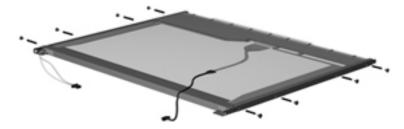


9. Use a sharp-edged tool to cut the tape (1) that secures the sides of the display panel to the display panel frame.

10. Remove the display panel frame (2) from the display panel.

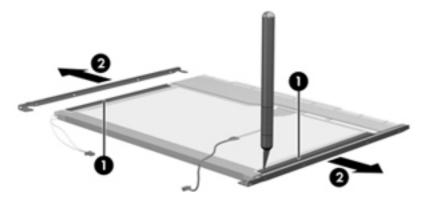


- 11. Remove the screws (1) that secure the backlight cover to the display panel.
- 12. Lift the top edge of the backlight cover (2) and swing it outward.

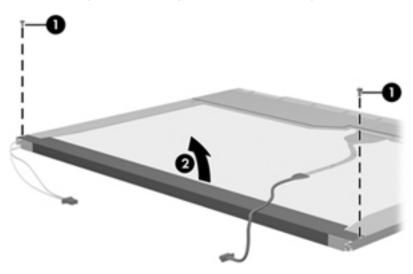


- 13. Remove the backlight cover.
- 14. Turn the display panel right-side up.

15. Remove the backlight cables (1) from the clip (2) in the display panel.

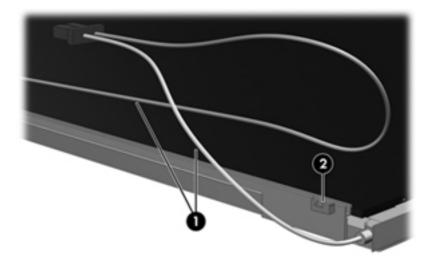


- 16. Turn the display panel upside down.
- 17. Remove the backlight frame from the display panel.

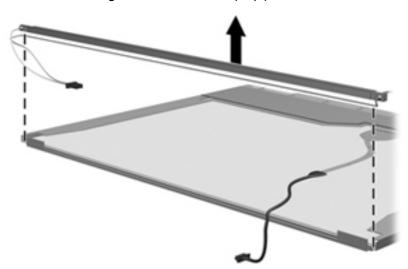


WARNING! The backlight contains mercury. Exercise caution when removing and handling the backlight to avoid damaging this component and causing exposure to the mercury.


18. Remove the backlight from the backlight frame.

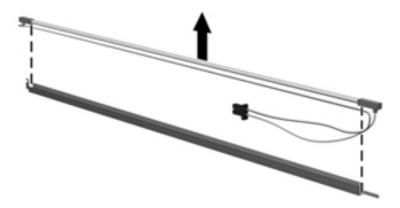

- 19. Disconnect the display cable (1) from the LCD panel.
- **20.** Remove the screws **(2)** that secure the LCD panel to the display rear panel.
- **21.** Release the LCD panel **(3)** from the display rear panel.
- **22.** Release the tape **(4)** that secures the LCD panel to the display rear panel.

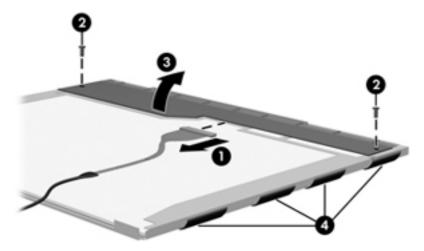

23. Remove the LCD panel.

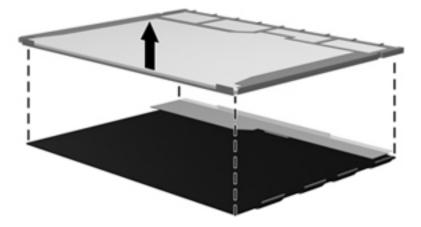

24. Recycle the LCD panel and backlight.

Index

A	bottom components 16	D
AC adapter, spare part numbers	button components 9	display
31, 33	buttons	specifications 108
Action keys 11	optical drive eject 15	subcomponents 28
antenna	power 9	display assembly
locations 8	TouchPad 12	removal 94
removal 101	TouchPad on/off 12	spare part numbers 19, 36,
spare part number 28, 35,	Web browser 9	39, 41, 94
101		display bezel
Antenna Kit, spare part number	C	removal 96
28, 35, 101	Cable Kit	spare part numbers 28, 35
audio, product description 4	contents 27	Display Cable Kit, spare part
audio-in jack 14	spare part number 22, 27, 35	numbers 28, 35, 40, 101
audio-out jack 14	cables, service considerations 43	display components 8
	caps lock light 11	display enclosure, spare part
В	chipset, product description 2	numbers 28, 35, 38, 39, 41,
b key 10	components	96
base enclosure, spare part	bottom 16	Display Hinge Kit, spare part
numbers 25, 35	button 9	number 28, 36, 100
battery	display 8	display panel
removal 50	fingerprint reader 9	product description 3
spare part numbers 26, 33,	front 13	removal 98
35, 50	keys 10	spare part number 28, 37, 99
battery bay 16	left-side 14	display panel cable
battery light 15	lights 11	removal 100
battery release latch 16	rear 13	spare part numbers 28, 101
Blu-ray ROM with LightScribe DVD	right-side 15	Display Rubber Kit, spare part
±R/RW Super Multi Double-Layer	speaker 9	number 29, 40
Drive	TouchPad 12	Display Screw Kit, spare part
precautions 44	computer feet, locations 49	number 29, 37
removal 51	computer major components 19	drive light 15
spare part number 27, 31,	computer part number 18, 48	drives, preventing damage 44
40, 51	computer specifications 107	DVD±RW and CD-RW Super Multi
Bluetooth module	connectors, service	Double-Layer Combo Drive with
removal 73	considerations 43	LightScribe
spare part number 22, 33, 73		precautions 44
Bluetooth module cable		removal 51
removal 74		spare part number 27, 31,
spare part number 22, 39		40, 51

E electrostatic discharge 44 equipment guidelines 47	Hard Drive Hardware Kit, spare part number 26, 30, 36, 54 HDMI port 14	webcam 8 wireless 12
esc key 10 Ethernet, product description 4 external media cards, product description 5 external monitor port 14	headphone jack 14 hinge removal 100 spare part number 28, 36, 100 hinge cover	mass storage device precautions 44 removal 54 spare part numbers 30, 54 memory module
fan/heat sink assembly removal 82 spare part numbers 25, 36, 39, 41, 82	removal 97 spare part number 28, 40, 98 jacks	product description 3 removal 57 spare part numbers 26, 34, 35, 57 microphone
feet, locations 49 fingerprint reader 9 fingerprint reader board removal 71	audio-in 14 audio-out 14 headphone 14 microphone 14	locations 8 product description 4 microphone jack 14 model description 18, 49
spare part number 22, 36, 71 fingerprint reader board cable disconnection 67 illustrated 27	network 14 RJ-45 14 K key components 10	model name 1 monitor port 14 mute light 11
fingerprint reader components 9 fn key 10 front component 13	keyboard product description 6 removal 61	network jack 14 num lk key 11 numeric keypad 11
graphics, product description 2 grounding guidelines 44 guidelines	spare part numbers 20, 36, 37, 40, 41, 61 keys Action 11	operating system, product description 7
equipment 47 grounding 44 packaging 46 transporting 46 workstation 46	b 10 esc 10 fn 10 num lk 11 numeric keypad 11 Windows applications 10	optical drive location 15 precautions 44 product description 4 removal 51 spare part numbers 27, 31,
H hard drive precautions 44 product description 3	Windows logo 10 L left-side components 14	40, 51 optical drive bracket, removal 52 optical drive connector cable illustrated 27
removal 54 spare part numbers 26, 30, 33, 34, 35, 40, 54 specifications 109, 110	light components 11 lights battery 15 caps lock 11	removal 93 optical drive eject button 15 optical drive light 15
hard drive bay 16 hard drive bracket illustrated 30 removal 55 hard drive connector cable illustrated 27	drive 15 fingerprint reader 12 mute 11 optical drive 15 power 11, 15 TouchPad off 12	packaging guidelines 46 plastic parts, service considerations 43 Plastics Kit, spare part number 27, 37, 52
removal 55	TouchPad on 12	

pointing device, product description 6	serviceability 7 video 4	removal 90 spare part number 23, 37,
ports	wireless 4	90
external monitor 14	product name 1, 17, 48	specifications
HDMI 14	product number 18, 48	computer 107
monitor port 14	,	display 108
product description 6	R	hard drive 109, 110
USB 14, 15	rear component 13	system board
power button 9	remote control, spare part	removal 78
power button board	number 32	spare part numbers 23, 37,
removal 69	removal/replacement	38, 39, 41, 78
spare part number 22, 37, 69	preliminaries 43	System Diagnostics 102
power button board cable	procedures 48	
disconnection 67	right-side components 15	T
illustrated 27	RJ-45 jack 14	Thermal Material Kit, spare part
power connector 15	RTC battery	numbers 24, 38, 39, 42, 78,
power connector cable	removal 56	82, 86
removal 76	spare part number 26, 33, 56	tools required 43
spare part number 23, 36	_	top cover
power cord	5	removal 65
set requirements 118	Screw Kit, spare part number 32,	spare part numbers 22, 38,
spare part numbers 31, 32,	37	40, 42, 65
33	security cable slot 15	TouchPad button 12
power light 11, 15	security, product description 6	TouchPad button board cable
power requirements, product	serial number 17, 48 service considerations	disconnection 67
description 6	cables 43	illustrated 27
processor	connectors 43	TouchPad cable, illustrated 27 TouchPad components 12
product description 1 removal 86	plastic parts 43	TouchPad off light 12
	service cover	TouchPad on light 12
spare part numbers 24, 33, 34, 35, 86	removal 52	TouchPad on/off button 12
product description	spare part number 27, 37, 52	TouchPad zone 12
audio 4	service tag 17, 48	transporting guidelines 46
chipset 2	serviceability, product description	manapaning garaamiaa
display panel 3	7	U
Ethernet 4	Setup Utility (BIOS) 102	USB board
external media cards 5	solid-state drive	removal 75
graphics 2	illustrated 31	spare part number 22, 37
hard drives 3	precautions 44	USB board cable, illustrated 27
keyboard 6	removal 54	USB DVB-T TV tuner, spare part
memory module 3	spare part number 26, 31,	number 32, 33
microphone 4	40, 54	USB DVD-T antenna, spare part
operating system 7	speaker components 9	number 32, 33
optical drive 4	speaker cover, spare part	USB port 14, 15
pointing device 6	numbers 23, 37, 38, 90	
ports 6	Speaker Kit, spare part number	V
power requirements 6	23, 37, 90	vent 13
processors 1	speakers	vents 14, 16
product name 1	locations 9, 13	video, product description 4
security 6		

W

```
warranty period 18, 49
Web browser button 9
webcam 8
webcam light 8
webcam/microphone module
  removal 97
  spare part number 28, 35, 97
Windows applications key 10
Windows logo key 10
wireless antenna
  locations 8
  removal 101
  spare part number 28, 35,
    101
wireless light 12
wireless, product description 4
WLAN module
  removal 58
  spare part numbers 26, 33,
    34, 38, 58
workstation guidelines 46
```