



HP JETDIRECT PRINT SERVERS Administrator's Guide

HP Jetdirect Firmware V.40

J7961G (635n)
J8007G (690n)

J8021A (ew2500)



HP Jetdirect Print Servers

Administrator's Guide (Firmware V.40)

© 2014 Copyright Hewlett-Packard Development Company, L.P.

Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

The information contained in this document is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Edition 11, 11/2014

Trademark Credits

Microsoft, Windows, Windows Server, Windows 7, Windows Vista, and Windows XP are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. NetWare® and Novell® are registered trademarks of Novell Corporation. IBM® is a registered trademark of International Business Machines Corp. Ethernet is a registered trademark of Xerox Corporation. PostScript is a trademark of Adobe Systems, Incorporated. UNIX® is a registered trademark of the Open Group.

Table of contents

1	Introducing the HP Jetdirect print server	1
	Supported print servers	1
	Supported network protocols	2
	Security protocols	3
	SNMP (IP and IPX)	3
	HTTPS	3
	Authentication	3
	EAP/802.1X port-based authentication	3
	IPsec/Firewall	4
	Supplied manuals	5
	HP support	5
	HP online support	5
	Firmware upgrades	5
	Firmware installation tools	5
	HP support by phone	6
	Product registration	6
	Product accessibility	6
2	HP software solutions summary	7
	HP Jetdirect Printer Installer for UNIX	9
	HP Web Jetadmin	9
	System requirements	9
	Install HP Web Jetadmin software	9
	Verify HP Web Jetadmin installation and provide access	10
	Configure and modify a device	10
	Remove HP Web Jetadmin software	10
	Internet Printer Connection software	10
	Microsoft-supplied software	10
	Windows XP/Server 2003 or 2008 integrated software	11
	Novell-supplied software	11
	Mac OS network installation	11
3	TCP/IP configuration	14
	IPv6 configuration	14
	IPv6 address introduction	14
	IPv6 address configuration	15

Link-local address	15
Stateless addresses	15
Stateful addresses	16
Use DNS	16
Tools and utilities	17
IPv4 configuration	17
Server-based and manual TCP/IP configuration (IPv4)	17
Default IP address (IPv4)	18
Default IP address is not assigned	18
Default IP address is assigned	18
Default IPv4 address configuration options	19
Default IPv4 behavior	20
TCP/IP configuration tools	20
Use BOOTP/TFTP (IPv4)	21
Advantages of using BOOTP/TFTP	21
Configure the print server using BOOTP/TFTP on UNIX	21
Use DHCP (IPv4)	36
UNIX systems	36
Windows systems	37
Discontinue DHCP configuration	38
Use RARP (IPv4)	39
Use the arp and ping commands (IPv4)	40
Use Telnet (IPv4)	41
Create a Telnet connection	41
A typical Telnet session	42
Telnet user interface options	43
Use Telnet to remove an IP address	61
Move to another network (IPv4)	62
Use the HP Embedded Web Server	62
Use the printer control panel	62
4 HP Embedded Web Server (V.40.xx)	64
Requirements	65
Compatible Web browsers	65
Supported HP Web Jetadmin version	65
View the HP Embedded Web Server	65
Operating notes	67
HP Jetdirect Home tab	67
Device tabs	68
Networking tab	68
TCP/IP Settings	74
Summary tab	74
Network Identification tab	75

TCP/IP(v4) tab	76
TCP/IP(v6) tab	77
Config Precedence tab	78
Advanced tab	79
Network Settings	81
IPX/SPX	81
AppleTalk	83
DLC/LLC	83
SNMP	83
Other Settings	85
Misc. Settings	85
Firmware Upgrade	87
LPD Queues	87
USB Settings	90
Support Info	90
Refresh Rate	90
Select Language	91
Security: Settings	91
Status	91
Wizard	91
Restore Defaults	93
Authorization	94
Admin. Account	94
Certificates	94
Configure certificates	95
Access Control	98
Mgmt. Protocols	99
Web Mgmt.	99
SNMP	99
SNMP v3	99
Other	100
802.1X Authentication	101
IPsec/Firewall	103
Assessment	103
Network Statistics	104
Protocol Info	104
Configuration Page	104
Other Links	104
? (Help)	104
Support	104
5 IPsec/Firewall configuration (V.40.xx)	105
Default Rule example	108

IPsec security associations (SA)	108
HP Jetdirect IPsec/Firewall wizard	108
Limitations to rules, templates and services	109
Step 1: Specify Address Template	110
Create Address Template	110
Step 2: Specify Service Template	111
Create Service Template	111
Manage Services	112
Manage Custom Services	112
Step 3: Specify Action	113
Specify IPsec/Firewall Template	113
Create IPsec Template	114
IPsec Protocols (Manual Keys)	119
Rule Summary	120
Configure Windows systems	120
6 Security features (V.40.xx)	121
Limit access to security features	123
7 Troubleshoot the HP Jetdirect print server	125
Reset to factory defaults	125
Example: Cold reset using the service menu	126
Disable an HP Jetdirect embedded print server (V.40.xx)	126
General troubleshooting	127
Troubleshooting chart - assess the problem	127
Procedure 1: Verify the printer is on and online	128
Procedure 2: Print an HP Jetdirect configuration page	128
Procedure 3: Resolve printer display error messages	129
Procedure 4: Resolve printer network communication problems	130
Troubleshooting wireless print servers	132
8 HP Jetdirect configuration pages	135
HP Jetdirect configuration page	135
Status field error messages	135
Configuration page format	136
Configuration page messages	137
HP Jetdirect Configuration/General Information	137
Security Settings	142
Network Statistics	144
TCP/IP protocol information	144
IPv4 section	145
IPv6 section	147
IPX/SPX protocol information	147

Novell/NetWare parameters	148
AppleTalk protocol information	149
DLC/LLC protocol information	150
Error messages	150
HP Jetdirect Security page	157
Security settings	158
IPsec Error Log	160
Local IP addresses	160
IPsec Statistics	160
IKE Stats	161
IPsec Rules	161
IPsec Security Associations (SA) table	162
Available Network Services	162

Appendix A LPD printing 163

About LPD	163
Requirements for configuring LPD	164
LPD setup overview	164
Step 1. Set up IP parameters	164
Step 2. Set up print queues	164
Step 3. Print a test file	165
LPD on UNIX systems	165
Configure print queues for BSD-based systems	165
Use SAM to configure print queues (HP-UX systems)	166
Print a test file	167
LPD on Windows Server 2003/2008 systems	168
Install TCP/IP software	168
Configure a network printer for Windows Server 2003/2008 systems	169
Verify the configuration	170
Print from Windows clients	170
LPD on Windows XP systems	170
Add Windows optional networking components	170
Configure a network LPD printer	171
Add a new LPD printer	171
Create an LPR port for an installed printer	171

Appendix B FTP printing 173

Requirements	173
Print files	173
Use FTP printing	173
FTP connections	173
Control connection	173
Data connection	174

FTP login	174
End the FTP session	175
Commands	175
Example FTP Session	176

Appendix C HP Jetdirect control panel menus (V.40.xx) 177

Graphical control panel menus	177
Classic control panel EIO menus	185

Appendix D Open source licensing statements 188

gSOAP	188
OpenSSL	188
OpenSSL license	188
Original SSLeay license	189

Index 191

1 Introducing the HP Jetdirect print server

HP Jetdirect print servers connect printers and other devices directly to a network. By attaching a device directly to a network, you can install it in a convenient location and share it with multiple users. In addition, a network connection allows data transfers to or from the device at network speeds. The following HP Jetdirect print server types are available:

- HP Jetdirect embedded print servers are integrated with a supported printer or multifunction peripheral (MFP). Because they are built directly into the printer's mother board, the print server cannot be independently purchased or replaced. However, depending on the printer (or MFP), they are assigned an HP part number for compatibility and identification purposes.
- HP Jetdirect EIO internal print servers are modular I/O cards installed in HP printers (or MFPs) that have a compatible enhanced input/output (EIO) slot.
- HP Jetdirect external print servers connect printers (or MFPs) to the network by adapting a printer's input/output connector, such as a USB port, to the network.

 **NOTE:** Unless otherwise specified, the term *print server* refers to an HP Jetdirect print server and not a separate computer running print server software.

Supported print servers

The following table lists the supported HP Jetdirect print server features and capabilities discussed in this manual.

Table 1-1 Supported HP Jetdirect print server features and capabilities

Model	Product Number	Printer Connect	Network Connect ¹	Network Protocols and Features ²	Firmware Version ³
690n	J8007G	EIO	10/100/1000T	Full (includes IPsec)	V.40.xx.nn
635n	J7961G	EIO	10/100/1000T	Full (includes IPsec)	V.40.xx.nn
ew2500	J8021A	USB 2.0	10/100-TX wired, or 802.1x wireless	Full	V.40.xx.nn

¹ Embedded HP Jetdirect print server support for 100T (Gigabit) depends on both the print server and printer/MFP in which it is installed.

² Full-featured support includes TCP/IP (IPv 4 and IPv 6), IPX/SPX, AppleTalk (EtherTalk), DLC/LLC, and advanced security features. Value-featured support includes TCP/IP (IPv 4 and IPv 6) only, with limited printing, management and security features. See [Table 1-2 Supported network protocols on page 2](#). HP Jetdirect print server support for Internet protocol security (IPsec) depends on the print server and the printer/MFP in which it is installed.

³ xx represents a release number. If nn appears, it is an encoded value for HP support use only.

To view the HP Jetdirect print server product number and installed firmware version, use the HP Jetdirect configuration page (see [HP Jetdirect configuration pages on page 135](#)), Telnet (see [TCP/IP configuration on page 14](#)), HP Embedded Web Server (see [HP Embedded Web Server \(V.40.xx\) on page 64](#)), or the network management applications. For firmware updates, see [Firmware upgrades on page 5](#).

Supported network protocols

The following table lists the supported network protocols and network printing environments that use those protocols.

Table 1-2 Supported network protocols

Supported Network Protocols	Network Printing Environments ¹	Product Support
TCP/IPv4	(Direct Mode printing) Microsoft Windows XP (32- and 64-bit), Server 2003, Server 2008, Vista	J8007G (690n) J7961G (635n)
	Microsoft Terminal Server and Citrix MetaFrame environments ²	J8021A (ew2500)
	Novell NetWare ² 5, 6.x	
	UNIX and Linux, including: Hewlett-Packard HP-UX, Sun Microsystems Solaris (SPARCsystems only), IBM AIX ² , HP MPE-iX ² , RedHat Linux ² , SuSE Linux ²	
	Line printing daemon (LPR/LPD) RFC-1179 compliant systems ²	
	Internet printing protocol (IPP)	
	File transfer protocol (FTP) printing	
TCP/IPv6	(Direct Mode printing) Microsoft Windows XP (32- and 64-bit). Server 2003, Server 2008, Vista. (Requires HP IPv6/IPv4 port monitor software running on the system.)	J8007G (690n) J7961G (635n)
	LPR/LPD RFC 1179 compliant systems with IPv6 client support	J8021A (ew2500)
	IPP systems with IPv6 client support	
	FTP printing	
IPX/SPX and compatible	Novell NetWare ²	J8007G (690n)
	(Direct Mode printing) Microsoft Windows XP (32-bit only)	J7961G (635n) J8021A (ew2500)
AppleTalk (EtherTalk only)	Apple Mac OS	J8007G (690n) J7961G (635n) J8021A (ew2500)
DLC/LLC	DLC/LLC protocols are provided for legacy systems that might require support ²	J8007G (690n) J7961G (635n) J8021A (ew2500)

¹ For additional network systems and versions, see the current HP Jetdirect product data sheets. For operation with other network environments, consult your system vendor or authorized HP dealer.

² For software documentation and support, contact your network system vendor.

If HP network setup and management software for supported systems is not supplied, obtain it from HP support at:

www.hp.com/support/net_printing

For software to set up network printing on other systems, contact your system vendor.

Security protocols

SNMP (IP and IPX)

Simple network management protocol (SNMP) is used by network management applications for device management. HP Jetdirect print servers support access to SNMP and standard management information base (MIB-II) objects on IPv4, IPv6 and IPX networks.

Full-featured HP Jetdirect print servers support an SNMP v1/v2c agent, and an SNMP v3 agent for enhanced security.

Value-featured print servers support an SNMP v1/v2c agent only.

HTTPS

Both full-featured and value-featured HP Jetdirect print servers support secure hypertext transfer protocol (HTTPS) for secure, encrypted management communications between the HP Embedded Web Server and your Web browser.

Authentication

EAP/802.1X port-based authentication

As a network client, HP Jetdirect full-featured print servers support network use with the extensible authentication protocol (EAP) on an IEEE 802.1X network. The IEEE 802.1X standard provides a port-based authentication protocol where a network port allows or blocks use, depending on client authentication results.

When using an 802.1X connection, the print server supports EAP with an authentication server, such as a remote authentication dial-in user service (RADIUS, RFC 2138) server.

Full-featured HP Jetdirect print servers support the following EAP/802.1X methods:

- **LEAP** (lightweight EAP) is a proprietary Cisco Systems protocol that uses passwords for mutual authentication (the client and the server authenticate each other).
- **PEAP** (protected EAP) is a mutual authentication protocol that uses digital certificates for network server authentication and passwords for client authentication. For additional security, the authentication exchanges are encapsulated within transport layer security (TLS). Dynamic encryption keys are used for secure communications.
- **EAP-TLS** (RFC 2716) is a mutual authentication protocol based on X.509v3-compliant digital certificates for authentication of both the client and the network authentication server. Dynamic encryption keys are used for secure communications.

The network infrastructure device that connects the print server to the network (such as a network switch) must also support the EAP/802.1X method used. In cooperation with the authentication server, the

infrastructure device can control the degree of network access and services available to the print server client.

To configure the print server for EAP/802.1X authentication, use the HP Embedded Web Server through your Web browser. For more information, see [HP Embedded Web Server \(V.40.xx\) on page 64](#).

Wireless print server authentication

HP Jetdirect wired/wireless print servers support several wireless authentication methods, which include the following:

- **WEP–Personal** Authentication is based on a secret, common wired equivalent privacy (WEP) key that must be configured on each wireless device. A device that does not have the proper WEP key cannot use the network. Static WEP encryption protocols are used for network communications.
- **WEP–Enterprise** Requires 802.1X credentials to use the wireless network. A dedicated server verifies the identity of the user or device that is requesting network use. There are several available protocols.
- **WPA/WPA2–Personal** Uses wi-fi protected access (WPA) standards through a pre-shared key. A user-specified passphrase must be entered to generate the pre-shared key. Dynamic WPA encryption protocols are used for network communications to provide enhanced security.
- **WPA/WPA2–Enterprise** Requires 802.1X credentials to use the wireless network. A dedicated server verifies the identity of the user or device that is requesting network use. There are several available protocols.

IPsec/Firewall

IPsec/Firewall features provide network-layer security on both IPv4 and IPv6 networks. A firewall provides simple control of IP traffic, which is either permitted access or discarded. IPsec, RFC 2401 provides additional protection through authentication and encryption protocols.

The IPsec/Firewall capabilities depend on the HP Jetdirect print server product and the printer/MFP in which it is installed. The following capabilities are available:

- Value-featured print servers do **not** support IPsec/Firewall operation.
- Full-featured print servers and printers/MFPs that support IPsec can control IP traffic by using both firewall and IPsec protection.
- Full-featured print servers and printers/MFPs that do not support IPsec can control IP traffic using firewall protection only.

To configure the print server for IPsec/Firewall operation, use the HP Embedded Web Server through your browser. For more information, see [IPsec/Firewall configuration \(V.40.xx\) on page 105](#).

Supplied manuals

For information about your HP Jetdirect print server, see the following manuals:

- Start or use guides, or equivalent printer documentation (shipped with printers that have factory-installed HP Jetdirect print servers).
- This manual, the *HP Jetdirect Print Server Administrator's Guide* for the applicable HP Jetdirect product models.

HP support

HP online support

Visit the HP Web site 24 hours a day, 7 days a week at:

www.hp.com/support/net_printing

Firmware upgrades

Full-featured HP Jetdirect print servers support firmware upgrades of new or enhanced features. If a firmware upgrade is available for your print server model, you can download and install the upgrade over your network. To check for and download available upgrades, visit the Hewlett-Packard Web site at:

www.hp.com/go/webjetadmin_firmware

Firmware installation tools

Install firmware upgrades for supported HP Jetdirect print servers over a network by using one of the following installation tools:

- **HP Jetdirect download manager (Windows)** Download from HP online support at:
www.hp.com/go/dlm_sw
- **HP Web Jetadmin** For more information about supported systems, visit HP Web Jetadmin at:
www.hp.com/go/webjetadmin
- **HP Embedded Web Server** Provides a firmware upgrade option. It is resident on the print server, and is accessible using a Web browser. For more information see [HP Embedded Web Server \(V.40.xx\) on page 64](#).
- **FTP** Transfer a firmware upgrade image file to the print server. To start an FTP session, use the device IP address or host name. If a password is set, it must be entered to log into the device. Ensure that the download is complete before exiting the session. Typical FTP commands to upgrade the device are provided in the following example:

```
ftp> bin
ftp> hash
ftp> cd /download
ftp> put <firmware image filename>
ftp>#####
#####...
ftp> bye
```

In the example, <firmware image filename> specifies the full path name.

HP support by phone

Highly trained technicians are ready to take your call. For the most recent HP support telephone numbers and available services worldwide, visit:

www.hp.com/support

 **NOTE:** For toll-free support in the USA and Canada, call 1-800-HPINVENT or 1-800-474-6836.

Telephone fees are the responsibility of the caller. Rates can vary. Contact your local telephone company for current rates.

Product registration

To register your HP Jetdirect print server, use the following HP Web page:

www.hp.com/go/jetdirect_register

Product accessibility

For information on HP's commitment to accessibility of HP Jetdirect print server products:

- Visit the HP Web site at: www.hp.com/accessibility
- Send email to: accessibility@hp.com

2 HP software solutions summary

HP provides a variety of software solutions to set up or manage your HP Jetdirect-connected network devices. To determine the appropriate software solution for your needs, see [Table 2-1 Software Solutions on page 7](#).

 **NOTE:** For more information on these and other solutions, visit HP online support at: www.hp.com/support/net_printing

Table 2-1 Software Solutions

Operating Environment	Function	Remarks
HP Jetdirect Printer Installer for UNIX (see HP Jetdirect Printer Installer for UNIX on page 9)		
HP-UX 10.x-10.20, 11.x Solaris 2.6, 7, 8 (SPARCsystems only) TCP/IPv4	A software solution for installation of HP Jetdirect-connected printers on an IPv4 network.	<ul style="list-style-type: none">You can download and install a version that runs from your hard disk from the HP Website.
HP Web Jetadmin (see HP Web Jetadmin on page 9)		
(See the HP Website for supported system updates.) Windows XP Professional, Server 2003, Server 2008, Vista HP-UX ¹ Solaris ¹ Fedora Core and SuSE Linux NetWare ¹ TCP/IPv4, IPX/SPX	An enterprise management tool for the remote installation, configuration, and management of HP Jetdirect-connected print servers, non-HP printers that support the standard MIBs, and printers with the HP Embedded Web Server.	<ul style="list-style-type: none">The HP preferred solution for ongoing management and installation of multiple printers anywhere on your intranet.Browser-based management.
Internet Printer Connection (see Internet Printer Connection software on page 10)		

Table 2-1 Software Solutions (continued)

Operating Environment	Function	Remarks
Windows XP, Server 2003, (Intel based), Server 2008 (Intel based) TCP/IPv4	A software solution for printing over the Internet to IPP-enabled HP Jetdirect-connected printers.	<ul style="list-style-type: none">• Can provide economical distribution of high-quality hardcopy documents over the Internet, replacing fax, mail, and overnight services.• Requires HP Jetdirect print server firmware version x.20.00 or later.

¹ Supports queue creation and peripheral management from HP Web Jetadmin hosted on a supported system.

HP Jetdirect Printer Installer for UNIX

The HP Jetdirect Printer Installer for UNIX supports HP-UX and Solaris systems. The software installs, configures, and provides diagnostics capabilities for HP printers connected to TCP/IPv4 networks using full-featured HP Jetdirect print servers.

You can download the installer from HP online support at:

www.hp.com/support/net_printing

For system requirements and installation information, see the documentation provided with the software.

HP Web Jetadmin

HP Web Jetadmin is an enterprise management tool for remotely installing, configuring, and managing a wide variety of HP and non-HP network printing devices using a standard Web browser. Use HP Web Jetadmin to proactively manage both individual or groups of devices.

HP Web Jetadmin supports devices that contain standard printer MIB objects for common management. Because it is well-integrated with HP Jetdirect print servers and HP printers, HP Web Jetadmin can provide enhanced management features.

To use HP Web Jetadmin, see the online help and documentation supplied with the software.

System requirements

HP Web Jetadmin software runs on Microsoft Windows XP Professional, Server 2003, Server 2008, Vista, and selected Linux (Fedora Core and SuSE Linux) systems. For information on supported operating systems, clients, and compatible browser versions, visit HP online support at: www.hp.com/go/webjetadmin.

 **NOTE:** When HP Web Jetadmin is installed on a supported host server, you can gain access to it from any client through a compatible Web browser (browse to the HP Web Jetadmin host). This allows printer installation and management on Novell NetWare and other networks.

Install HP Web Jetadmin software

To install HP Web Jetadmin software, use the following steps:

1. Verify that you have administrator privileges on the local system.
2. Download the installation files from HP online at: www.hp.com/go/webjetadmin.
3. Follow the on-screen instructions to install the HP Web Jetadmin software.

 **NOTE:** Installation instructions are also contained in the HP Web Jetadmin install file.

Verify HP Web Jetadmin installation and provide access

- Navigate to the HP Web Jetadmin installation using your Web browser, as shown in the following example:

```
http://systemname.domain:port/
```

In the example, `systemname.domain` is the host name of your Web server and `port` is the port number assigned during installation. By default, the port number is 8000.

- Provide access to HP Web Jetadmin software by adding a link to your Web server's home page that is addressed to HP Web Jetadmin's URL. For example:

```
http://systemname.domain:port/
```

Configure and modify a device

Using your browser, navigate to HP Web Jetadmin's URL. For example:

```
http://systemname.domain:port/
```

-
-  **NOTE:** In place of `systemname.domain`, you can use the IPv4 address of the host computer on which HP Web Jetadmin is installed.
-

Follow the instructions on the appropriate home page to find and manage your printer.

Remove HP Web Jetadmin software

To remove HP Web Jetadmin software from your Web server, use the uninstall program provided with the software package.

Internet Printer Connection software

(For full-featured print servers only) HP Jetdirect print servers support IPP and Secure IPP.

Using the appropriate software on your system, you can create an IPP print path from your system to a supported HP Jetdirect-connected printer over the Internet.

-
-  **NOTE:** Security features available in IPP printing software are limited. For incoming print path requests, the network administrator must configure the network firewall to accept incoming IPP requests. Secure IPP connections over HTTPS (Secure HTTP) is supported.
-

The following features and benefits are provided by Internet printing:

- Print high-quality, time-sensitive documents remotely, in full color or black-and-white
- Print documents remotely at a fraction of the cost of current methods (such as fax, mail, or overnight delivery services)
- Extend the traditional LAN printing model to that of an Internet printing model
- Transmit IPP outbound print send requests through firewalls

Microsoft-supplied software

-
-  **NOTE:** Contact Microsoft for support of Windows IPP software.
-

Windows XP/Server 2003 or 2008 integrated software

You can use the IPP client software integrated with the Windows system. The IPP implementation on the HP Jetdirect print server is compatible with the Windows system IPP client software.

To set up a print path to an HP Jetdirect-connected Internet printer using the Windows XP IPP client software, use the following steps:

1. Click **Start**, and then click **Printers and Faxes**.
2. Run the **Add Printer** wizard (click **Add a printer**), and then click **Next**.
3. Select the option for a **Network printer** and then click **Next**.
4. Select **Connect to a printer on the Internet** and enter the print server's URL, as in the following example:

```
http:// <IP_address> [/ipp/port#]
```

In the example, <IP_address> is the IPv4 address configured on the HP Jetdirect print server and [/ipp/port#] identifies the port number, which is port 1 for single-port print servers (default is /ipp/port1).

Example:

```
http://192.160.45.40 An IPP connection to an HP Jetdirect print server with IPv4 address 192.160.45.40. ("/ipp/port1" is assumed and not required.)
```

 **NOTE:** For a Secure IPP connection, replace `http://` with `https://` in the URL string above.

Click **Next**.

5. Provide the printer driver. (The HP Jetdirect print server does not contain drivers. You might need the printer CD-ROM to install the driver.)
6. Click **OK** to install the printer driver and then follow the on-screen instructions.

Novell-supplied software

The HP Jetdirect print server is compatible with IPP running on NetWare 5.1 with SP1 or later. For NetWare client support, see your NetWare technical documentation or contact Novell.

Mac OS network installation

Software tools

Use the following Mac OS software tools:

 **NOTE:** For more information on Mac OS solutions, visit: www.hp.com/go/mac

- Mac OS Classic systems: The HP LaserJet Utility provides configuration and management of your HP Jetdirect-connected printers/MFPs on AppleTalk (EtherTalk) networks.
- Mac OS X v10.2 and later: Use one of the following for printer/MFP configuration and management:
 - HP Printer Utility (for supported printers only) on TCP/IP and AppleTalk (EtherTalk) networks.
 - HP Embedded Web Server on the printer/MFP device from your browser (such as Safari 2.0 or greater) by entering the IP address or host name of the device as the URL address.
- Mac OS X v10.2 and later: Use system utilities, such as Apple's Print Center or Bonjour (formerly known as Rendezvous) for TCP/IP Printing.

Use Bonjour (Mac OS X v10.4)

HP Jetdirect print servers support Bonjour (formerly known as Rendezvous) technology for printer discovery and installation over a TCP/IP network.

 **NOTE:** The printer must be on the same network segment and not across a router.

The **Network Port Configurations** setting must have the appropriate network port enabled (for example, **Built-in Ethernet** is active) and be listed at the top of the ports list.

To uniquely identify a printer on a network that contains many printers, print an HP Jetdirect configuration page from the printer control panel. That page contains unique identification information for the printer.

To start Bonjour and the HP Embedded Web Server directly, use the following steps:

1. Open **Safari** and click the bookmark icon.
2. In the bookmark list, select **Bonjour**. A list of discovered printers is displayed.
3. Identify and select your printer. A string of hexadecimal digits is listed, which should match the LAN hardware address (or the last 6 digits of the address) on the HP Jetdirect configuration page for the printer.
4. Double-click the printer to use the HP Embedded Web Server on the printer. Configure the network settings using the **Networking** tab.

To add the printer to your system for printing, use the following steps:

1. Open **System Preferences**, and then open **Print & Fax**.
2. Click **+** to add a printer.
3. Using the **Default Browser** in the **Printer Browser** window, select the printer, and then click **Add**.

 **NOTE:** If multiple connection types are listed, select the one with a Bonjour connection.

4. In the **Print & Fax** window, verify the new printer is added.

Verify network configuration

To verify your current network configuration, print an HP Jetdirect configuration page, or use the HP Embedded Web Server and view the **Networking** tab settings.

When printing a configuration page, make sure a **READY** message appears on the control panel for at least 1 minute before printing the page.

For information on the contents of the configuration page, see [HP Jetdirect configuration pages on page 135](#).

Test the configuration

1. Open **Safari** and display a page.
2. Click the Safari **File** menu and select **Print**.
3. In the **Printer** field, select the printer and then click the **Print** button.

If the printer prints the job, you have connected your printer to your network correctly. If your printer does not print, see [Troubleshoot the HP Jetdirect print server on page 125](#).

3 TCP/IP configuration

To operate properly on a TCP/IP network, you must configure the HP Jetdirect print server with valid TCP/IP network configuration parameters, such as an IP address that is valid for your network.

The HP Jetdirect print server supports both IPv4 and IPv6 networks simultaneously. Print server configuration for IPv4 operation remains the same as in previous HP Jetdirect products.

IPv6 configuration

HP Jetdirect print servers provide basic configuration capabilities for operation on an IPv6 network. For IPv6 printing services, the print server supports the following:

- IP printing (raw) using HP-proprietary TCP port 9100
- LPD printing using standard TCP port 515
- IPP printing using standard TCP port 631
- FTP printing using standard TCP ports 20 and 21

The print server supports remote configuration by DHCPv6 servers and IPv6 routers. In addition, it supports remote configuration and management from a Web browser over HTTP or HTTPS. Local configuration of basic IPv6 parameters is available through the printer control panel if supported by the printer/MFP device.

IPv6 address introduction

An IPv6 address consists of 128 bits. The normal format of an IPv6 address is eight fields, each separated by a colon (:). Each field contains four hexadecimal digits representing 16 bits:

hhhh : hhhh : hhhh : hhhh : hhhh : hhhh : hhhh

In the example, *h* is a hexadecimal digit 1 through 0, A through F. This is sometimes called *colon hexadecimal format*.

Depending on the application, you can enter or display an IPv6 address using a shortened version when successive fields contain all zeros (0). You can use two colons (::) and omit leading zeros in a field. (The use of two colons to represent successive zero fields can be used only once in an address.) The following is an example IPv6 address:

2001:0DB8:0000:0000:0000:0000:0200:bb02

Using the shortened version, the example address is:

2001:DB8::200:bb02

However, the use of two colons to represent successive zero fields can be used only once in an address.

IPv6 addresses are often specified by a *prefix* that identifies a fixed value associated with the first part of the address, followed by a *prefix length* that specifies the number of bits in the prefix. In IPv6

addressing, a prefix length of 64 typically specifies a network or subnet. A prefix with a prefix length less than 64 typically identifies a portion of the IPv6 address space or a route.

The following is a list of those reserved portions of the IPv6 address space:

- `2001:DB8::/32` (reserved for use only as examples in documentation)
- `FE80::/10` (reserved for link-local addresses only)

IPv6 addresses do not use subnet masks as in IPv4 formats. Instead, the prefix length can specify an entire network/subnet, or the network portion of a complete host address, as in the following example:

```
2001:DB8:1234:5678:abcd::ef01/64
```

In the example, `/64` is the prefix length and indicates that `2001:DB8:1234:5678` is the network/subnet for the specific host uniquely identified by `abcd::ef01`.

For a more thorough discussion of IPv6 address formats and types, see the Internet Engineering Task Force (IETF) IPv6 RFCs, or see the documentation supplied with your IPv6-supported system or router.

IPv6 address configuration

Most print server addresses are automatically configured in accordance with the IPv6 standards. If necessary, the print server allows manual entry of an IPv6 address by using the printer control panel or the HP Embedded Web Server. If the print server is enabled for IPv6 operation, all automatically configured IPv6 addresses are active. However, by default, manually configured addresses are disabled and must be manually enabled.

Stateless addresses assigned to the print server are under the control of a router. Stateful addresses are normally assigned by a DHCPv6 server under the direction of a router. However, you can configure the print server to always use stateful configuration, or to use stateful configuration if stateless configuration fails.

Link-local address

IPv6 link-local addresses are automatically self-configured and allow IPv6 communications between hosts connected to the same link (routers do not forward link-local addresses). Because each IPv6 host on a local network assigns itself a link-local address, a router-based infrastructure is not required.

When the print server creates a link-local address, the link-local prefix `FE80::/10` is combined with a 64-bit host address, derived from the print server's MAC address, in accordance with a predefined algorithm.

For example, a print server with MAC address `00-0E-7F-E8-01-DD` results in the following link-local address:

```
FE80::20e:7FFF:FEE8:1DD
```

The use of link-local IPv6 addressing is beneficial for small, configuration free networks.

Stateless addresses

Stateless addresses are usually assigned to the print server under router control, and *not* by a server, such as a DHCPv6 server. However, the router can specify that other configuration be provided by a server.

The print server must receive periodic router advertisement messages. These messages contain one or more IPv6 prefix options, and they can specify 64-bit local subnets, or a default route. These prefixes are combined with a 64-bit host address derived from the print server's MAC address to form the IPv6 stateless addresses configured on the print server.

Stateless addressing is useful for networks that require traffic to be routed but with minimal network configuration.

Stateful addresses

A DHCPv6 server configures stateful IPv6 addresses on HP Jetdirect print servers. A DHCPv6 policy on the print server determines when to use the DHCPv6 server for stateful configuration. You can select one of the following DHCPv6 policies for the print server to use:

- **Under router control** Use DHCPv6 stateful configuration when requested by the router.
- **Stateless configuration fails or is disabled** Use DHCPv6 stateful configuration if stateless configuration fails or is disabled.
- **Always use DHCPv6** On startup, always use DHCPv6 for stateful configuration.

Stateful configuration is useful when host configuration beyond that provided by a router is necessary, such as a domain name or DNS server addresses.

Use DNS

HP Jetdirect print servers support the configuration of IPv6 DNS servers for the print server.

Due to IPv6 address length and complexity, specifying an IPv6 address in applications to identify or search for a device can be cumbersome. Some client applications might not support the direct IPv6 address entry. However, name resolution can be available for the print server if the appropriate IPv6 records are configured in DNS. If name resolution is supported, you can enter the print server's host name or a fully qualified domain name (FQDN) when using these applications.

 **NOTE:** The print server does not support dynamic updates to DNS. IPv6 addresses are not automatically supplied to DNS servers.

Tools and utilities

System tools and utilities for IPv6 networks are available to access or troubleshoot communications with the print server. The following are some examples:

- **ipconfig /all** or **ipconfig /all** Identify IPv6 addresses for various interfaces configured on the system. An interface IPv6 address can contain a *ScopeID*, which is an interface index identifier (for example, %3) that is appended to a link-local IPv6 address.
- **ping6** Send test packets to a remote interface and report the response packets. This command uses the following syntax:

```
ping6 <IPv6 address><%ScopeID>
```

 **NOTE:** On Windows Server 2003, or Server 2008, use the ping command for an IPv6 address by specifying the appropriate command option.

In the example, <IPv6 address> is the address of the remote host interface, such as the print server. The <%ScopeID> uniquely identifies the interface on the local system when it is configured with multiple link-local IPv6 addresses.

For example, if the print server's link-local IPv6 address is `fe80::20e:7fff:fee8:1dd`, and the Windows system contains a LAN interface identifier (%3), enter the following:

```
ping6 fe80::20e:7fff:fee8:1dd%3
```

Depending on the local interface used, you might need to create a route to the remote host address.

- **IPv6 addresses as URL** An IPv6 address in a URL must be enclosed in brackets. The following is an example using the HP Embedded Web Server on the HP Jetdirect print server:

```
http://[fe80::20e:7fff:fee8:1dd]
```

In the example, `fe80::20e:7fff:fee8:1dd` is the IPv6 address of the print server.

 **NOTE:** The browser must support direct IPv6 addressing as a URL.

For detailed information on these and other tools, see your system documentation and help.

IPv4 configuration

This section provides specific IPv4 configuration information for HP Jetdirect print servers on a TCP/IPv4 network.

Server-based and manual TCP/IP configuration (IPv4)

When in a default factory state (as initially shipped or after a cold reset) and turned on, the HP Jetdirect print server attempts to obtain its TCP/IP configuration using a server-based method, such as bootstrap protocol/trivial transfer protocol (BOOTP/TFTP), dynamic host configuration protocol/trivial transfer protocol (DHCP/TFTP), or reverse address resolution protocol (RARP). Depending on the print server model, it can take several minutes for these methods to complete. If configuration is not successful, a default IP address is assigned.

You can also configure the print server manually by using Telnet, a Web browser, the printer control panel, arp and ping commands (when the default IP address is 192.0.0.192), or SNMP-based

management software. Manually assigned TCP/IP configuration values are retained when the print server is turned off, and then turned on.

You can configure the print server to use either server-based or manual configuration of TCP/IP settings at any time.

To identify the print server's configured IP address, see the HP Jetdirect configuration page.

Default IP address (IPv4)

When in a factory-default state, the HP Jetdirect print server has no IP address. You can assign a default IP address depending on the network environment.

Default IP address is not assigned

A default IP address is not assigned if a server based method (such as BOOTP or DHCP) is successful. If the print server is turned off and then on, the same method is again used to retrieve the IP configuration settings. If the method now fails (for example, the BOOTP or DHCP server is not available), a default IP address is not assigned. Instead, the print server continues to send IP configuration requests indefinitely. To change this behavior, perform a cold reset.

A default IP address is assigned only when a network cable is attached to a wired print server.

Default IP address is assigned

A default IP address is assigned if the factory default methods fail, or if the print server is re-configured by an administrator to use a server-based method (such as BOOTP or DHCP) and the method fails.

If a default IP address is assigned, the address depends on the network to which the print server is connected. The print server senses broadcast packets on the network to determine the appropriate default IP settings, using the following methods:

- On small private networks that adhere to automated, standards-based IP address assignments, the print server uses a link-local addressing technique to assign a unique IP address. Link-local addressing is limited to a local IP subnet (not routed) and can be referenced as **Auto IP**. The IP address assigned is in the range of 169.254.1.0 to 169.254.254.255 (commonly referred to as 169.254/16). If necessary, you can further modify the IP address for your network, using supported TCP/IP configuration tools.

With link-local addresses, subnetting is not used. The subnet mask is 255.255.0.0, and cannot be changed.

Link-local addresses do not route off the local link, and access to or from the Internet is not available. The default gateway address is the same as the link-local address.

If a duplicate address is sensed, the HP Jetdirect print server automatically reassigns its address, if necessary, in accordance with standard link-local addressing methods.

- On large or enterprise IP networks, a temporary address of 192.0.0.192 is assigned until it is re-configured with a valid address through supported TCP/IP configuration tools. This temporary address is referred to as **Legacy Default IP**.
- On mixed-environment networks, the self-assigned default IP address is either 169.254/16 or 192.0.0.192. Verify that the assigned default IP address is correct, using the HP Jetdirect configuration page.

To determine the IP address configured on your print server, use the HP Jetdirect configuration page. See [HP Jetdirect configuration pages on page 135](#).

Default IP on wireless and wired print servers

Wired and wireless print servers can have different default IP configuration results:

- When turned on, a print server in a factory default state that is connected to a network through a cable (wired), retrieves its IP settings by systematically using BOOTP, DHCP, and RARP. If configuration fails, a default IP address is assigned.
- A wired/wireless print server in a factory default state that is not connected by a cable initially has only a wireless ad hoc connection available. Retrieval of IP settings from a network is limited to a few seconds, during which a single BOOTP request is transmitted, and broadcast packets are sensed. Because a response from a BOOTP server on an ad hoc network is unlikely, and the number of broadcast packets sensed are minimal, a default IP configuration using link-local addressing is likely.

The IP configuration can change when the wireless print server is connected to a DHCP network because, sending DHCP requests is enabled by default even after a link-local address is assigned.

Configuration tools that require a specific default IP address on the print server for initial communication might not work without modification. For the default IP address settings actually configured on the print server, see the HP Jetdirect configuration page.

Default IPv4 address configuration options

Default IPv4 parameter

A default IP configuration parameter on the print server controls how the default IPv4 address is assigned. Whenever the print server is unable to obtain an IP address during a forced TCP/IP reconfiguration (for example, when manually configured to use BOOTP or DHCP), this parameter determines the default IPv4 address to use.

When the print server is in a factory default state, this parameter is undefined.

If the print server is initially configured with a default IPv4 address by using either a link-local IPv4 address or the legacy default 192.0.0.192 IP address, the default IP parameter is set to either [Auto IP](#) or [Legacy Default IP](#) to match.

You can change the Default IP parameter by using a supported configuration tool, such as Telnet, a Web browser, a printer control panel, or SNMP management applications.

DHCP requests enable/disable

When a default IPv4 address is assigned, you can configure the print server to send periodic DHCP requests, which are used to retrieve IP configuration settings from a DHCP server on the network. By default, this parameter is enabled, allowing transmission of DHCP requests. To disable this parameter, use a supported configuration tool such as Telnet, a Web browser, or SNMP management applications.

When an **HP Jetdirect Wireless Print Server** in a factory default state (without a network connection) is initially turned on, it likely self-assigns a link-local IP address. If a network connection to a DHCP server-based network is made, the IP address might be reconfigured because DHCP requests on the print server are enabled by default.

Default IPv4 behavior

When turned on, a factory-default print server connected to a network through a cable (wired), retrieves its IPv4 settings by systematically using BOOTP, DHCP, and RARP. This can take several minutes to complete. If configuration fails, a default IPv4 address is assigned.

Configuration tools that require a specific default IP address on the print server for initial communication might not function without modification. To view the default IP address settings on the print server, use the HP Jetdirect configuration page.

TCP/IP configuration tools

When a network connection is established, you can configure an HP Jetdirect print server with valid TCP/IP parameters for your network, using the following methods:

- **Software solutions** Use installation, setup, and management software running on supported systems. For more information see [HP software solutions summary on page 7](#).
- **BOOTP/TFTP** Download the data from a network-based server by using BOOTP and TFTP each time the printer is turned on. For more information, see [“Use BOOTP/TFTP \(IPv4\) on page 21”](#).
The BOOTP daemon (bootpd) must be running on a BOOTP server that is accessible by the printer.
- **DHCP/TFTP** Use DHCP and TFTP each time the printer is turned on. These protocols are supported on HP-UX, Solaris, Linux, Windows Server 2003, Server 2008, NetWare, and Mac OS systems. (See your network operating system manuals to verify that your server supports DHCP.) For more information, see [Use DHCP \(IPv4\) on page 36](#).

 **NOTE:** For more information about Linux and UNIX systems, see the bootpd man page.

On HP-UX systems, a sample DHCP configuration file (dhcptab) might be located in the /etc directory.

Because HP-UX does not currently provide dynamic domain name system (DDNS) services for its DHCP implementations, HP recommends that you set all print server lease durations to *infinite*. This ensures that print server IP addresses remain static until DDNS is provided.

-
- **RARP** Use RARP to answer the print server's RARP request and supply the print server with the IP address. The RARP method allows you to only configure the IP address. For more information, see [“Use RARP \(IPv4\) on page 39”](#).
 - **arp and ping commands** (Only for print servers configured with Legacy default IP address 192.0.0.192) Use the `arp` and `ping` commands from your system. For more information, see [“Use the arp and ping commands \(IPv4\) on page 40”](#).
 - **Telnet** Set configuration parameters by creating a Telnet connection from your system to the HP Jetdirect print server, using the default IP address. Once configured, the print server saves the configuration when turned off and then turned on. For more information, see [“Use Telnet \(IPv4\) on page 41”](#).
 - **HP Embedded Web Server** Use the HP Embedded Web Server on the HP Jetdirect print server to set configuration parameters. For more information, see [HP Embedded Web Server \(V.40.xx\) on page 64](#).
 - **Printer control panel** (For printers that support HP Jetdirect control panel menus.) Manually enter the configuration data, using the printer control panel keys. Because you can configure a

limited subset of the configuration parameters, control panel configuration is recommended only during troubleshooting or for simple installations. If control panel configuration is used, the print server saves the configuration when turned off and then turned on. For more information, see [“Use the printer control panel on page 62”](#).

Use BOOTP/TFTP (IPv4)

BOOTP and TFTP provide a convenient way to automatically configure the HP Jetdirect print server for TCP/IPv4 network operation. When turned on, the HP Jetdirect print server sends a BOOTP request message onto the network. A properly configured BOOTP server on the network responds with a message that contains basic network configuration data for the HP Jetdirect print server. The BOOTP server's response can also identify a file (TFTP configuration file) that contains extended configuration data for the print server. The HP Jetdirect print server uses TFTP to download this file from the BOOTP server or from a separate TFTP server.

 **NOTE:** If you are configuring an HP Jetdirect wireless print server, this section assumes that a wireless network connection is established.

BOOTP/TFTP servers are typically UNIX or Linux systems. Windows Server 2003, Server 2008, and NetWare servers can respond to BOOTP requests. Windows Server 2003 and Server 2008 servers are configured through Microsoft DHCP services (see [Use DHCP \(IPv4\) on page 36](#)). However, Windows Server 2003 and Server 2008 systems might require third-party software for TFTP support. For setup of NetWare BOOTP servers, see the NetWare documentation.

 **NOTE:** If the HP Jetdirect print server and BOOTP/DHCP server are located on different subnets, IPv4 configuration might fail unless the routing device supports BOOTP Relay, which allows the transfer of BOOTP requests between subnets.

Advantages of using BOOTP/TFTP

Using BOOTP/TFTP to download configuration data has the following benefits:

- Enhanced configuration control of the HP Jetdirect print server. Configuration by other methods, such as a printer control panel, are limited to select parameters.
- Ease of configuration management. Network configuration parameters for the entire network are in one location.
- Ease of HP Jetdirect print server configuration. Complete network configuration is automatically downloaded each time the print server is turned on.

 **NOTE:** BOOTP operation is similar to DHCP, but the resulting IP parameters are the same when turned off and then turned on. In DHCP, IP configuration parameters are leased and might change over time.

When in its factory-default state and turned on, the HP Jetdirect print server attempts to automatically configure itself using several dynamic methods, including BOOTP.

Configure the print server using BOOTP/TFTP on UNIX

This section describes how to configure the print server using BOOTP and TFTP services on UNIX servers. Use BOOTP and TFTP to download network configuration data from a server to the HP Jetdirect print server over the network.

Systems using network information service (NIS)

If your system uses NIS, you might need to rebuild the NIS map with the BOOTP service before performing the BOOTP configuration steps. See your system documentation.

Configure the BOOTP server

For the HP Jetdirect print server to obtain its configuration data over the network, the BOOTP/TFTP servers must have the appropriate configuration files. The print server uses BOOTP to obtain entries in the `/etc/bootptab` file on a BOOTP server. It uses TFTP to obtain additional configuration information from a configuration file on a TFTP server.

When the HP Jetdirect print server is turned on, it broadcasts a BOOTP request that contains its MAC (hardware) address. A BOOTP server daemon searches the `/etc/bootptab` file for a matching MAC address, and if successful, sends the corresponding configuration data to the HP Jetdirect print server as a BOOTP reply. The configuration data in the `/etc/bootptab` file must be correct. For a description of entries, see [Bootptab file entries \(IPv4\) on page 22](#).

The BOOTP reply can contain the name of a configuration file that stores enhanced configuration parameters. If the HP Jetdirect print server finds such a file, it uses TFTP to download the file and configure itself using the parameters. For a description of the entries, see [TFTP configuration file entries \(IPv4\) on page 24](#). Configuration parameters retrieved through TFTP are optional.

 **NOTE:** HP recommends that the BOOTP server be located on the same subnet as the printers it serves. Routers that are incorrectly configured might not forward BOOTP broadcast packets.

Bootptab file entries (IPv4)

The following is an example of a `/etc/bootptab` file entry for IPv4 configuration of an HP Jetdirect print server:

```
picasso:\
:hn:\
:ht=ether:\
:vm=rfc1048:\
:ha=0001E6123456:\
:ip=192.168.40.39:\
:sm=255.255.255.0:\
:gw=192.168.40.1:\
:lg=192.168.40.3:\
:T144="hpn/picasso.cfg":
```

The configuration data contains tags to identify the various HP Jetdirect parameters and their settings.

- Colon (:): End of a field.
- Backslash (\): Entry is continued on the next line.
- Space: Not allowed between the characters on a line.
- Names (such as host names): Must begin with a letter and can contain only letters, numbers, periods (domain names, or hyphens).
- Underline: Not allowed.

Entries and tags supported by the HP Jetdirect print server are listed in the following table:

Table 3-1 Tags supported in a BOOTP/DHCP boot file

Item	RFC 2132 Option	Description
nodename	-	Peripheral name. Identifies an entry point to a list of parameters for a specific peripheral. Must be the first field in an entry. (In the example, <code>nodename</code> is <code>picasso</code> .)
ht	-	Hardware type. For the HP Jetdirect print server, set this to <code>ether</code> (for Ethernet). Must precede the <code>ha</code> tag.
vm	-	BOOTP report format (required). Set this to <code>rfc1048</code> .
ha	-	Hardware address. The media access control (MAC) address or hardware address, which is displayed on the HP Jetdirect configuration page as the HARDWARE ADDRESS . Must be preceded by the <code>ht</code> tag.
ip	-	IP address tag (required) of the HP Jetdirect print server.
sm	1	Subnet mask. Used by the HP Jetdirect print server to identify the portions of an IP address that set the network/subnetwork number and the host address.
gw	3	Gateway IP address. The IP address of the default gateway (router) that the HP Jetdirect print server uses for communication with other subnets.
ds	6	DNS server's IP address. Specify only a single name server.
lg	7	The syslog server's IP address. Specify the server that the HP Jetdirect print server sends syslog messages to.
hn	12	Host name. (This parameter does not accept a value.) When present in the file, causes the BOOTP daemon to download the host name to the HP Jetdirect print server. The host name is printed on the HP Jetdirect configuration page, or returned on an SNMP <code>sysName</code> request by a network application.
dn	15	Domain name. Specify the domain name for the HP Jetdirect print server (for example, <code>support.hp.com</code>). It does not include the host name, and is not the FQDN (such as <code>printer1.support.hp.com</code>).
ef	18	Extensions file. Specify the relative path name of the TFTP configuration file. NOTE: This is similar to the vendor-specific tag T144, described below.
na	44	NetBIOS-over-TCP/IP Name Server (NBNS) IP addresses. Specify a primary and secondary server in order of preference.
lease-time	51	DHCP IP address lease duration time. Specify the time in seconds.
tr	58	DHCP T1 timeout. Specify the DHCP lease renewal time in seconds.
tv	59	DHCP T2 timeout. Specify the DHCP lease rebind time in seconds.
T144	-	Relative path name of the TFTP configuration file. HP proprietary. Specify the path name using double quotes, for example <code>"pathname"</code> . Long path names are truncated. For file format information, see TFTP configuration file entries (IPv4) on page 24 . NOTE: Standard BOOTP option 18 (extensions file path) also allows a standard tag (ef) for specifying the relative path name of the TFTP configuration file.
T145	-	Idle timeout. HP proprietary. Specify the time, in seconds, that a print data connection can remain idle before being closed. The range is 1–3600 seconds.

Table 3-1 Tags supported in a BOOTP/DHCP boot file (continued)

Item	RFC 2132 Option	Description
T146	-	Buffer packing. HP proprietary. Set buffer packing for TCP/IP packets. 0 (default): Pack normal data buffers before sending to the printer. 1: Disable buffer packing. Data is sent to the printer when received.
T147	-	Write mode. HP proprietary. Set the TCP PSH flag for device-to-client data transfers. 0 (default): Disable. 1: Set the TCP PSH (all-push) in all data packets.
T148	-	IP gateway disable. HP proprietary. Control configuration of a Gateway IP address. 0 (default): Allow configuration of an IP address. 1: Prevent configuration.
T149	-	Interlock mode. HP proprietary. Require an acknowledgement (ACK) on all TCP packets before allowing the printer to close a port 9100 print connection. Specify a port number and option, as in the following example: <i><Port Number> <Option></i> <i><Port Number></i> : For supported HP Jetdirect print servers, the default port number is 1. <i><Option></i> : Set to 0 (default) to disable interlock, or 1 to enable. For example, setting this to "1 1" specifies port number 1 and enables interlock.
T150	-	TFTP server's IP address. HP proprietary. Specify the IP address of the TFTP server where the TFTP configuration file is located.
T151	-	Network configuration. HP proprietary. Send either BOOTP-ONLY or DHCP-ONLY requests.

TFTP configuration file entries (IPv4)

To provide additional configuration parameters for your HP Jetdirect print server, such as SNMP or non-default settings, you can download a configuration file using TFTP. This TFTP configuration file's relative path name is specified in the BOOTP reply using the `/etc/bootptab` file's T144 vendor-specific tag, or the ef standard BOOTP tag entry. The following is an example of a TFTP configuration file. (The # symbol signifies a remark and is not included in the file.)

Example HP Jetdirect TFTP configuration file

# Allow subnet 192.168.10.0 access	Set <code>allow</code> to enable subnet 192.168.10.0 with access to the printer. This specifies a host or network of hosts that can connect to the print server. Add up to 10 entries using TFTP, Telnet, or the HP Embedded Web Server. You can also specify single IP addresses for specific systems. The following list describes the example TFTP configuration file settings:
allow: 192.168.10.0 255.255.255.0	
#	
# Disable Telnet	
telnet-config: 0	<code>telnet-config</code> Set to zero (0). Cannot use Telnet.
#	
# Enable the embedded Web server	<code>ews-config</code> Set to one (1). Use the HP Embedded Web Server.
ews-config: 1	<code>auth-trap</code> Set to on. Send SNMP authentication traps.
#	
# Detect SNMP unauthorized usage	<code>trap-dest</code> IP address of the system to send SNMP traps to.
auth-trap: on	<code>set-cmnt-name</code> Community name required in SNMP Set commands.
#	
# Send traps to 192.168.10.1	
trap-dest: 192.168.10.1	
#	
# Specify the Set Community Name	
set-cmnty-name: 1homer2	
#	
# End of File	

This table describes the TFTP command parameters supported by HP Jetdirect print servers. (Optional commands for the same function are shown in parentheses.)

Table 3-2 TFTP configuration file parameters

General

`passwd:` (or `passwd-admin:`)

Administrator's password to control access to HP Jetdirect print server configuration parameters using Telnet, HP Web Jetadmin, or the HP Embedded Web Server. Enter up to 16 alphanumeric characters. Clear the password with a cold reset.

`sys-location:` (or `host-location:`, `location:`)

Physical location of the printer (SNMP `sysLocation` object). Enter up to 64 alphanumeric characters. The default location is undefined.

`sys-contact:` (or `host-contact:`, `contact:`)

Name of the network or device administrator (SNMP `sysContact` object) who administers or services the printer. Enter up to 64 alphanumeric characters. The default contact is undefined.

Table 3-2 TFTP configuration file parameters (continued)

`ssl-state:` (or `ssl-redirect-config`)

Print server's security level for Web communication, using the following values:

- 1: Forced redirection to the HTTPS port. Use only HTTPS (secure HTTP) communication.
- 2: Disable redirection to HTTPS. Use both HTTP and HTTPS communication.

`security-reset:`

Reset security settings on the print server to factory default values. 0 (default): Do not reset. 1: Reset.

TCP/IP Main

`llmnr:`

Link local multicast name resolution (LLMNR). 0: Disable. 1 (default): Enable.

`host-name:` (or `sys-name:`, `name:`)

Node name that appears on the HP Jetdirect configuration page. Default is NPIxxxxxx, where xxxxxx represents the last six digits of the LAN hardware address.

`ip-config:`

Print server configuration method. Use the following values:

- `manual`: Wait for IP parameters using manual tools, such as Telnet, the HP Embedded Web Server, the control panel, or installation/management software. Status is `User Specified`.
- `bootp`: Send BOOTP requests on the network for dynamic IP configuration.
- `dhcp`: Send DHCP requests on the network for dynamic IP configuration.
- `auto_ip`: Automatically configure with a unique link-local address 169.254.x.x.

`ipsec-config:`

The `ipsec-config` command is available on print servers that support both IPsec and Firewall configuration. The `firewall-config` command is available on full-featured print servers that do not support IPsec, but allow Firewall configuration. 0: Disable IPsec/Firewall operation. 1: (Read Only) IPsec/Firewall policies are configured and enabled.

NOTE: Disable IPsec or Firewall operation on the print server after IPsec/Firewall policies are configured and enabled. You cannot enable IPsec/Firewall operation using this command. Instead, use the HP Embedded Web Server to configure and enable IPsec/Firewall polices.

`ip:`

IP address for the print server. For example:

```
ip-config manual
```

```
ip 192.168.45.39
```

In the example, `manual` signifies manual configuration and `ip` sets the IP address on the print server. To clear the IP address, set the value to 0.0.0.0. If you change this IP address, you must use it on the next Telnet connection.

Table 3-2 TFTP configuration file parameters (continued)

<code>subnet-mask:</code>
Identify the network and host portions of an IPv4 address in received messages. For example: <code>subnet-mask 255.255.255.0</code>
In the example, 255.255.255.0 is stored on the print server. To clear the subnet IP address and disable the mask, set the value to 0.0.0.0.
NOTE: If the HP Jetdirect print server is configured by DHCP and you manually change the subnet mask or the default gateway address, you should also change the print server's IP address. This releases the assigned DHCP address back to the DHCP IP address pool.
<code>default-gw:</code>
IP address of a default gateway used by the print server. For example: <code>default-gw 192.168.40.1</code>
In the example, 192.168.40.1 is the IP address of the default gateway.
NOTE: If the HP Jetdirect print server is configured by DHCP and you manually change the subnet mask or the default gateway address, you should also change the print server's IP address. This releases the assigned DHCP address back to the DHCP IP address pool.
<code>Config Server</code>
(Read only.) IP address of the server (such as a BOOTP or DHCP server) that last configured the IP address on the HP Jetdirect print server.
<code>tftp-server:</code>
(Read only.) IP address of the TFTP server that provided parameters to the HP Jetdirect print server.
<code>tftp-filename:</code>
(Read only.) Path and TFTP filename on the TFTP server. For example: <code>hpnpr/printer1.cfg</code>
<code>parm-file:</code>
Path and file name whose contents are printed each time the print server is turned on. Enter up to 64 alphanumeric characters.
<code>domain-name:</code>
Domain name of the device, for example <code>support.hp.com</code> . Does not include the host name and is not the FQDN, such as <code>printer1.support.hp.com</code> .
<code>pri-dns-svr: (or dns-srv:)</code>
IP address of the DNS server.
<code>sec-dns-svr:</code>
IP address of a secondary DNS server to use if the primary DNS server is unavailable.
<code>pri-wins-svr: (or pri-wins-srv:)</code>
IP address of the primary Windows Internet naming service (WINS) server.
<code>sec-wins-svr: (or sec-wins-srv:)</code>
IP address of the secondary WINS) server.
TCP/IP Print Options

Table 3-2 TFTP configuration file parameters (continued)

9100-printing: (or 9100-config:)
Print to TCP port 9100 on the print server. 0: Disable. 1 (default): Enable.
ftp-printing: (or ftp-config:, ftp:)
Print through FTP. 0: Disable. 1 (default): Enable.
ws-printing
Print through WS. 0 (default): Disable. 1: Enable.
ipp-printing: (or ipp-config:, ipp:)
Print through IPP. 0: Disable. 1 (default): Enable.
lpd-printing: (or lpd-config:, lpd:)
Print using the line printer daemon (LPD) on the HP Jetdirect print server. 0: Disable. 1 (default): Enable.
banner:
Print a port-specific LPD banner page. 0: Disable. 1 (default): Enable.
ipp-job-acct:
Use job accounting for IPP printing. 0: Disable. 1 (default): Enable.
addq:
Add a user-defined queue. Specify the queue name, prepend string name, append string name, and the processing queue (typically, RAW) in the command line. Enter up to 32 alphanumeric characters. Add up to six user-defined queues.
CAUTION: Do not use lowercase and uppercase characters to differentiate queue names. Management of LPD queues by other tools can cause unpredictable results.
defaultq:
Set the queue name to use when the specified queue for a print job is unknown. The default queue name is: AUTO
addstring:
Specify a user-defined character string to prepend or append to print data. You can add up to eight character strings. Specify the string name and the character string in the <code>addstring</code> command line.
interlock: (or interlock-mode:)
Require an acknowledgement (ACK) on all TCP packets before allowing the printer to close a port 9100 print connection. Specify a port number and the parameter value. For current HP Jetdirect print servers, the port number is 1. For example, <code>interlock 1 1</code> specifies port 1 and enable interlock. 0 (default): Disable. 1: Enable.
buffer-packing: (or packing:)
Pack the TCP/IP data buffer.
0 (default): Pack the data buffer before sending to the printer.
1: Disable buffer packing. Data is sent to the printer as it is received.

Table 3-2 TFTP configuration file parameters (continued)

`write-mode:`

Set the TCP PSH flag for device-to-client data transfers.

0 (default): Disable.

1: Enable the all-push option in all data packets.

`mult-tcp-conn:`

Allow multiple TCP connections.

0 (default): Enable multiple connections.

1: Disable multiple connections.

TCP/IP Raw Print Ports

`raw-port: (or addrawport:)`

Additional ports for printing to TCP port 9100. Valid ports are 3000 to 9000, which are application-dependent.

TCP/IP Access Control

`allow: netnum [mask]`

Add entries to the host access list stored on the HP Jetdirect print server. Each entry specifies a host or network of hosts allowed to connect to the printer. The `netnum` parameter sets the network number or host IP address, and `mask` sets an address mask of bits applied to the network number and host address to verify access. Add up to 10 access list entries. If there are no entries, all hosts are permitted access. For example:

`allow: 192.0.0.0 255.0.0.0` Allow hosts on network 192.

`allow: 192.168.1.2` Allow a single host. The default mask 255.255.255.255 is assumed and is not required.

`allow: 0` Clear the host access list.

For additional information, see [Security features \(V.40.xx\) on page 121](#).

TCP/IP Other Settings

`syslog-config:`

Allow syslog server operation on the print server: 0: Disable. 1 (default): Enable.

`syslog-svr: (or syslog-srv:)`

IP address of the server that the HP Jetdirect print server sends syslog messages to.

`syslog-max:`

Maximum number of syslog messages sent by the HP Jetdirect print server on a per-minute basis. Allows administrators to control the log file size. 0: No restriction on the number of messages. 10 (default): Send a maximum of 10 messages per minute.

`syslog-priority:`

Filter messages sent to the syslog server. The filter range is 0 to 7, with 0 being the most specific, and 7 the most general. Only messages that are lower than the specified filter level (or higher in priority) are reported. 7 (default): Messages of all priorities are sent. 8: Disable. No syslog messages are sent.

Table 3-2 TFTP configuration file parameters (continued)

`syslog-facility:`

Identify the source facility of a message. Typically used to identify the source of selected messages during troubleshooting. By default, the HP Jetdirect print server uses LPR as the source facility code. Use values of `local0` through `local7` to isolate individual or groups of print servers.

`slp-config:`

Use the service location protocol (SLP) operation on the print server. 0: Disable. 1 (default): Enable.

`slp-keep-alive:`

Number of minutes the print server waits between sending multicast packets on the network to prevent deletion from network device tables. The range is 1 to 1440 minutes. Some infrastructure devices, such as switches, delete active devices from their device tables because of network inactivity. 0: Disable.

`syslog-protocol`

Use the TCP or UDP port for syslog communication when logging security events. 6: `PROTO_TCP`. 17 (default): `PROTO_UDP`.

`syslog-port`

Valid port number of the TCP or UDP port for syslog communication when logging security events. The valid range is from 1 to 65535. The default port number is 514.

`t11-slp:`

IP multicast time to live (TTL) setting for SLP packets. The range is 1 to 15 hops. (A hop is the number of routers from the local network.). -1: Disable. 4 (default): Enable.

`bonjour-config:`

Use Bonjour. (Previously listed as multicast domain name system [mDNS services.]) Bonjour is typically used for IP address and name resolution (through UDP port 5353) where a conventional DNS server is neither used or available. 0: Disable. 1 (default): Enable.

`bonjour-svc-name:`

Bonjour service name. This name is persistent and is used to resolve a particular device or service if socket information (such as the IP address) changes from session to session. Apple Bonjour displays this service. The default service name is the printer model and the LAN hardware (MAC) address. Enter up to 64 alphanumeric characters.

`bonjour-domain-na`

(Read only.) Bonjour domain name assigned to the device, in the form `<host name>.local`. If a user-specified host name is not assigned, the default host name `NPIxxxxxx` is used, where `xxxxxx` are the last 6 digits of the LAN hardware (MAC) address.

Table 3-2 TFTP configuration file parameters (continued)

`bonjour-pri-svc:`

Highest priority Bonjour service to use for printing. Set this using the following values:

- 1: Port 9100 printing
- 2: IPP port printing
- 3: Default LPD `raw` queue
- 4: Default LPD `text` queue
- 5: Default LPD `auto` queue
- 6: Default LPD `binps` (binary PostScript) queue
- 7 through 12: If user-specified LPD queues are defined, corresponds to user-specified LPD queues 5 through 10.

The default selection depends on the printer, typically port 9100 printing or LPD `binps`.

`hoplimit-wsd`

Set the WS-Discovery hop limit for the site local IPv6 multicast packet.

`ipv4-multicast:`

Receive and transmit IP version 4 multicast packets. 0: Disable. 1 (default): Enable.

NOTE: If disabled, other protocols that use multicast protocols, such as Bonjour and SLP, might also be disabled without notification.

`idle-timeout:`

Seconds that an idle print data connection is allowed to remain open. The range is 1 to 3600 seconds. Since the card supports only a single TCP connection, the idle timeout balances the opportunity of a host to recover or complete a print job against the ability of other hosts to access the printer. 0: Disable. 270 (default): Enable.

`user-timeout:` (or `telnet-timeout:`)

Seconds that a Telnet or FTP session is idle before it is automatically disconnected. The range is 1 to 300 seconds. 0: Disable. 900 (default): Enable.

CAUTION: Small values, such as 1 to 5, can disable the use of Telnet. A Telnet session can terminate before any changes are made.

`cold-reset`

Reset to TCP/IP factory default settings after a cold reset. (Parameters for other subsystems, such as IPX/SPX or AppleTalk, are not affected.) 0: Disable. Retain TCP/IP settings after a cold reset. 1: Enable. Restore factory default TCP/IP settings.

`icmp-ts-config`

ICMPv4 time stamp requests. 0 (default): Disable. 1: Enable.

`ews-config:` (or `web:`)

Allow use of the HP Embedded Web Server on the print server. 0: Disable. 1 (default): Enable.

Table 3-2 TFTP configuration file parameters (continued)

tcp-mss: (or subnets-local:)

Maximum segment size (MSS) that the HP Jetdirect print server advertises for use when communicating with local subnets (Ethernet MSS=1460 bytes or more) or remote subnets (MSS=536 bytes). Use the following values:

- 0 (default): All networks are assumed to be local (Ethernet MSS=1460 bytes or more).
- 1: Use MSS=1460 bytes (or more) for subnets, and MSS=536 bytes for remote networks.
- 2: All networks are assumed to be remote (MSS=536 bytes), except the local subnet.

MSS affects performance by preventing IP fragmentation that can result in data retransmission.

tcp-mls:

Maximum segment life (MSL) in seconds. The range is 5 to 120 seconds. 0: Disable. 15 (default): Enable.

telnet-config: (or telnet:)

Print server allows incoming Telnet connections. If disabled, you can regain access by changing the setting in the TFTP file and turning the print server on and then off, or resetting the print server to factory default values (cold reset). 0: Disable. 1: Enable. Allow incoming Telnet connections.

default-ip:

IP address to use when the print server is unable to obtain an IP address from the network during a forced TCP/IP re-configuration. For example, when turned off and then on or when manually configured to use BOOTP/DHCP.

DEFAULT_IP: Set the legacy default IP address 192.0.0.192.

AUTO_IP: Set a link-local IP address 169.254.x.x.

The initial setting is determined by the IP address obtained when first turned on.

default-ip-dhcp:

Periodically transmit DHCP requests when a legacy default IP address 192.0.0.192 or link-local IP address 169.254.x.x is automatically assigned.

- 0: Disable.
 - 1 (default): Enable DHCP requests.
-

dhcp-arbitration:

Seconds that the print server waits for DHCP configuration offers. The range is between 1 and 10 seconds. 0: Disable. 5 (default): Enable.

web-refresh:

Time interval for HP Embedded Web Server diagnostic page updates. The range is between 1 and 99999 seconds. 0: Disable.

SNMP

snmp-config:

SNMP operation on the print server. 0: Disable. 1 (default): Enable SNMP operation.

CAUTION: Disabling SNMP disables all SNMP agents (SNMP v1, v2, v3), communication with HP Web Jetadmin, and firmware upgrades using HP downloading utilities.

Table 3-2 TFTP configuration file parameters (continued)

<code>get-cmnty-name:</code> (or <code>get-community-name:</code>)
Optional. Password to determine which SNMP GetRequests the HP Jetdirect print server responds to. If a Get community name is set, the print server responds to either a user-specified community name or the factory-default. Enter up to 255 alphanumeric characters.
<code>set-cmnty-name:</code> (or <code>set-community-name:</code>)
Password to determine which SNMP SetRequests (control functions) the HP Jetdirect print server responds to. The community name of an incoming SNMP SetRequest must match the print server's Set community name for the print server to respond. (For additional security, you can limit configuration access through the print server's host access list.) Enter up to 255 alphanumeric characters.
<code>auth-trap:</code> (or <code>authentication-trap:</code>)
Send SNMP authentication traps. Authentication traps indicate that an SNMP request was received, but the community name check failed. 0: Disable. 1 (default): Enable.
<code>trap-dest:</code> (or <code>trap-destination:</code>)
Add a host's IP address to the HP Jetdirect print server's SNMP trap destination list. The list can contain up to six entries. To receive SNMP traps, the systems listed on the SNMP trap destination list must have a trap daemon that listens for the traps. The following is the parameter format: <code>trap-dest: <ip-address> [community name] [port number]</code> The default community name is <code>public</code> . The default SNMP port number is 162. (You must enter a community name to specify a port number.) If a <code>trap-dest</code> follows a <code>trap-community-name</code> , the trap community name is assigned to those entries unless a different community name is specified in each <code>trap-dest</code> command. To delete the table list, set trap destination to zero (<code>trap-dest: 0</code>). By default the SNMP trap destination list is empty and does not send SNMP traps.
IPX/SPX
<code>ipx-config:</code> (or <code>ipx/spx:</code>)
IPX/SPX protocol operation on the print server. 0: Disable. 1 (default): Enable.
NOTE: On HP Jetdirect 635n print servers, by default all network protocols except TCP/IP are disabled.
<code>ipx-unit-name:</code>
Name assigned to the print server. By default, the name is <code>NPIxxxxxx</code> , where <code>xxxxxx</code> are the last six digits of the LAN hardware address. Enter up to 31 alphanumeric characters.
<code>ipx-frametype:</code>
IPX frame type setting available for your print server model. Set to <code>AUTO</code> (default), <code>EN_SNAP</code> , <code>EN_8022</code> , <code>EN_8023</code> , <code>EN_II</code> .
<code>ipx-sapinterval:</code>
Time in seconds that the HP Jetdirect print server waits between service advertising protocol (SAP) broadcasts on the network. The range is 1 to 3600 seconds. 0: Disable. 60 (default): Enable SAP broadcasts.
<code>ipx-nds-tree:</code>
Name of the Novell directory services (NDS) tree for this printer.

Table 3-2 TFTP configuration file parameters (continued)

`ipx-nds-context:`

NDS context for the HP Jetdirect print server. Enter up to 256 alphanumeric characters.

`ipx-job-poll:`

Time in seconds that the HP Jetdirect print server waits to check for print jobs in a print queue. The range is 1 to 255 seconds. 0: Disable. 2 (default): Enable.

`pjl-banner:` (or `ipx-banner:`)

Print an IPX banner using the printer job language (PJI). 0: Disable. 1 (default): Enable banner pages.

`pjl-eoj:` (or `ipx-eoj:`)

IPX end-of-job notification. 0: Disable. 1 (default): Enable.

`pjl-toner-low:` (or `ipx-toner-low:`)

IPX toner-low notification. 0: Disable. 1 (default): Enable.

AppleTalk

`appletalk:` (or `at-config:`, `ethertalk:`)

Use AppleTalk (EtherTalk) protocol operation on the print server. 0: Disable. 1 (default): Enable.

NOTE: On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.

DLC/LLC

`dlc/llc-config:` (or `dlc/llc:`)

Use DLC/LLC protocol operation on the print server. 0: Disable. 1 (default): Enable.

NOTE: On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.

Other Settings

`link-type:`

(For wired 10/100/1000T Ethernet.) Set the print server's link speed (10, 100, 1000 Mbps) and communication mode (Full- or Half-Duplex). The available link-speed depends on the print server model. The communication modes are: `AUTO`, `1000FULL`, `100AUTO`, `100FULL`, `100HALF`, `10FULL`, `10HALF`.

For `AUTO` (default), the print server uses auto-negotiation to configure the highest link speed and communication mode allowed. If auto-negotiation fails, either `100TX HALF` or `10TX HALF` is set, depending on the detected link speed of the hub/switch port. (A 1000T half-duplex selection is not supported.)

Table 3-2 TFTP configuration file parameters (continued)

`upgrade:`

Set the name and location of a firmware upgrade file for the HP Jetdirect print servers.

CAUTION: Ensure that command parameters are properly entered. Verify that the upgrade file is a higher version than the currently installed version. The print server attempts to upgrade when the upgrade file contains a higher version than the installed version.

The following is the command format:

```
upgrade: <TFTP server IP> <Version> <Product Number> <Filename>
```

The following defines the parameters:

<TFTP Server IP> IP address of the TFTP server.

<Version> Firmware version of the upgrade file.

<Product Number> Print server product number.

<Filename> Path and filename of the firmware upgrade file.

`usb-mode:`

USB port communication mode on the HP Jetdirect print server.

- `Auto` (default): Automatically negotiate and set the highest communication mode possible for the attached printer or device.
 - `MLC`: HP proprietary communication mode (multiple logical channels) that allows multiple channels of simultaneous print, scan, and status communications.
 - `BIDIR`: Standard connection that supports bi-directional communication between the printer and print server. The print server sends print data and receives status from the printer.
 - `UNIDIR`: Standard connection in which data is transferred in one direction only (to the printer).
-

`usb-speed:`

(Read-only parameter, USB 2.0 products only.) Auto-negotiated communication speed over the USB connection between the HP Jetdirect print server and the device.

- `Full Speed`: 12 Mbits/sec as specified in the USB v2.0 specifications, compatible with USB v1.1 specifications.
 - `Hi-Speed`: 480 Mbits/sec for USB v2.0 devices only.
 - `Disconnected`: USB port is not connected.
-

`hw-acclrn-conf`

Use hardware acceleration. 0: Disable. 1 (default): Enable.

`status-page-lang:`

Page description language (PDL) that the print server uses to send the HP Jetdirect configuration/status page to the printer.

- `Auto` (default): Auto-detected when the print server is turned on or after a cold reset.
 - `PCL`: Hewlett-Packard Printer Control Language.
 - `ASCII`: Standard ascii characters.
 - `HPGL2`: Hewlett-Packard Graphics Language (v2).
 - `PS`: PostScript language.
-

Table 3-2 TFTP configuration file parameters (continued)

network-select:

(For HP Jetdirect products with a dual wired/wireless port.) Specifies the active behavior of the print server.

- Auto (default): Automatically determines the active port. If a network cable is attached, then only the IEEE 802.3 wired port is active. If a network cable is not attached, only the IEEE 802.11g wireless port is active.
- Wired: Only the 802.3 wired port is active.
- Wireless: Only the 802.11g wireless port is active.

CAUTION: If you plug in a network cable on an active wireless network, wireless use of the device is terminated.

Support

support-name: (or support-contact:)

Identify the name of a person to contact for support of this device.

support-number:

Phone number or extension to call for support of this device.

support-url:

Web URL for product information on this device over the Internet or an intranet.

tech-support-url:

Web URL for technical support over the Internet or an intranet.

Use DHCP (IPv4)

DHCP (RFC 2131/2132) is one of several automatic configuration mechanisms that the HP Jetdirect print server uses. If you have a DHCP server on your network, the HP Jetdirect print server automatically obtains its IP address from that server and registers its name with any RFC 1001- and 1002-compliant dynamic name services if a WINS server IP address is specified.

You can also use a TFTP configuration file with DHCP to configure extended parameters. For more information on TFTP parameters, see [Use BOOTP/TFTP \(IPv4\) on page 21](#).

 **NOTE:** DHCP services must be available on the server. See your system documentation or online help to install or enable DHCP services.

If you are configuring an HP Jetdirect wireless print server, this section assumes that a wireless network connection is established.

If the HP Jetdirect print server and BOOT/DHCP server are located on different subnets, IP configuration can fail unless the routing device allows for the transfer of DHCP requests between subnets.

UNIX systems

For more information on setting up DHCP on UNIX systems, see the bootpd man page.

On HP-UX systems, a sample DHCP configuration file (dhcptab) might be located in the `/etc` directory.

If your HP-UX system does not provide DDNS services for its DHCP implementation, HP recommends that you set all print server lease durations to infinite. This ensures that print server IP addresses remain static until dynamic domain name services are available.

Windows systems

HP Jetdirect print servers support IP configuration from a supported Windows DHCP server. This section describes how to set up a pool or scope of IP addresses that the Windows server can assign or lease to any requester. When configured for BOOTP or DHCP operation and turned on, the HP Jetdirect print server automatically sends a BOOTP or DHCP request for its IP configuration. If properly set up, a Windows DHCP server responds with the print server's IP configuration data.

 **NOTE:** For specific topics or for additional support, see the information supplied with your DHCP server software.

To avoid problems resulting from changing IP addresses, HP recommends assigning printers IP addresses with infinite lease durations or using reserved IP addresses.

Windows Server 2003 and Server 2008

To set up a DHCP(IPv4) scope on a Windows Server 2003 or Server 2008 system, perform the following steps:

1. Run the Windows DHCP manager utility.
2. Click **Start**, and then click **Control Panel**. Open the **Administrative Tools** folder and run the **DHCP** utility.
3. In the **DHCP** window, locate and select your Windows server in the DHCP tree.
If your server is not listed, select **DHCP** and click the **Action** menu to add the server.
4. Select your server in the DHCP tree, click the **Action** menu, and then select **New Scope**. This runs the **Add New Scope** Wizard.
5. In the **Add New Scope** Wizard, click **Next**.
6. Enter a Name and Description for this scope, then click **Next**.
7. Enter the range of IP addresses for this scope (beginning and ending IP address), type the subnet mask, and then click **Next**.

 **NOTE:** If subnetting is used, the subnet mask defines which portion of an IP address specifies the subnet and which portion specifies the client device.

8. If applicable, type the range of IP addresses within the scope to be excluded by the server, and then click **Next**.
9. Set the IP address lease duration for your DHCP clients, and then click **Next**.
HP recommends that all printers be assigned reserved IP addresses. Do this after setting up the scope (see step 11).
10. Select **No** to configure DHCP options for this scope later, and then click **Next**.

To configure DHCP options now, select **Yes**. Click **Next** after each step.

- a. Optional. Type the IP address of the router (or default gateway) to be used by clients.
 - b. Optional. Type the Domain Name and DNS servers for clients.
 - c. Optional. Type the WINS server names and IP addresses.
 - d. Select **Yes** to activate the DHCP options now.
- 11.** You have successfully set up the DHCP scope on this server. Click **Finish** to close the wizard.
- 12.** To configure your printer with a reserved IP address within the DHCP scope, complete the following steps:
- a. In the DHCP tree, open the folder for your scope and select **Reservations**.
 - b. Click the **Action** menu and select **New Reservation**.
 - c. Type the appropriate information in each field, including the reserved IP address for your printer. (Note: the MAC address for your HP Jetdirect-connected printer is available on the HP Jetdirect configuration page.)
 - d. Under Supported types, select **DHCP only**, and then click **Add**. (Note: Selecting **Both** or **BOOTP only** results in a configuration through BOOTP because of the sequence in which HP Jetdirect print servers initiate configuration protocol requests.)
 - e. Specify another reserved client, or click **Close**. The reserved clients added are displayed in the Reservations folder for this scope.
- 13.** Close the DHCP manager utility.

Discontinue DHCP configuration

△ **CAUTION:** Changes to an IP address on your HP Jetdirect print server can require updates to the printer or system printing configurations for clients or servers.

If you do not want your HP Jetdirect print server configured through DHCP, reset it to use a different method by selecting one of the following:

- 1.** For IPv4 configured print servers, use the printer control panel to set Manual or BOOTP configuration. Once set, DHCP is not used.
- 2.** Use Telnet to set Manual (status is User Specified) or BOOTP configuration. Once set, DHCP is not used.
- 3.** Modify the TCP/IP parameters using the HP Embedded Web Server or HP Web Jetadmin.

If you change to BOOTP configuration, the DHCP parameters are released and the TCP/IP protocol is initialized.

If you change to Manual configuration, the DHCP IP address is released and the specified IP parameters are used. **If you manually provide the IPv4 address, set all of the configuration parameters, such as subnet mask, default gateway, and idle timeout.**

 **NOTE:** If you re-enable a DHCP configuration, the print server acquires its configuration information from a DHCP server. When you choose DHCP and complete your configuration session (using Telnet, for example), the TCP/IP protocol for the print server is re-initialized and all current configuration information is deleted. The print server then attempts to acquire new configuration information by sending DHCP requests on the network to a DHCP server.

For DHCP configuration using Telnet, see [Use Telnet \(IPv4\) on page 41](#) in this chapter.

Use RARP (IPv4)

You can configure the print server to use RARP on UNIX and Linux systems.

 **NOTE:** If you are configuring an HP Jetdirect wireless print server, this section assumes that a wireless network connection is established.

The procedure enables the RARP daemon running on your system to respond to an RARP request from the HP Jetdirect print server and to supply the IP address to the print server. Configure RARP using the following steps:

1. Turn the printer off.
2. Log onto your UNIX or Linux system as the super user.
3. Use the process status command to verify the RARP daemon is running on your system, as in the following example from the system prompt:

```
ps -ef | grep rarpd (Unix)
```

```
ps ax | grep rarpd (BSD or Linux)
```

4. The system response should be similar to the following:

```
861 0.00.2 24 72 5 14:03 0:00 rarpd -a  
860 0.00.5 36 140 5 14:03 0:00 rarpd -a
```
5. If the RARP daemon is not running on the system (the process is not in the process list), see the `rarpd` man page for instructions about starting the daemon.
6. Edit the `/etc/hosts` file to add your designated IP address and node name for the HP Jetdirect print server, as in the following example:

```
192.168.45.39 laserjet1
```

7. Edit the `/etc/ethers` file (`/etc/rarpd.conf` file in HP-UX 10.20) to add the LAN hardware address/station address (from the configuration page) and the node name for the HP Jetdirect print server, as in the following example:

```
00:01:E6:a8:b0:00 laserjet1
```

 **NOTE:** If your system uses Network Information Service (NIS), you need to incorporate changes to the NIS host and ethers databases.

8. Turn the printer on.
9. Verify that the card is configured with the correct IP address, by using the ping utility as in the following example:

```
ping <IP address>
```

In the example, <IP address> is the assigned address from RARP.

10. If ping does not respond, see [Troubleshoot the HP Jetdirect print server on page 125](#).

Use the arp and ping commands (IPv4)

You can configure an HP Jetdirect print server with an IP address using the `arp` command from a supported system. The workstation from which the configuration is made must be located on the same network segment as the HP Jetdirect print server.

 **NOTE:** If you are configuring an HP Jetdirect wireless print server, this section assumes that a wireless network connection is established.

Using the `arp` and `ping` commands with HP Jetdirect print servers requires the following:

- Windows XP, Server 2003, Server 2008, or UNIX system configured for TCP/IP operation
- Legacy default IP address of 192.0.0.192 on the print server
- LAN hardware (MAC) address of the HP Jetdirect print server, specified on an HP Jetdirect configuration page, or on a label attached to HP Jetdirect external print servers

 **NOTE:** You might need root privileges to run the `arp` command.

After an IP address is assigned using the `arp` and `ping` commands, use other tools such as Telnet, the HP Embedded Web Server, or HP Web Jetadmin to configure other IP parameters.

To configure an HP Jetdirect print server, use the following commands:

```
arp -s <IP address> <LAN hardware address>
```

```
ping <IP address>
```

The <IP address> is the desired IP address assigned to the print server, and <LAN hardware address> is the LAN hardware address of the print server. The `arp` command writes the entries to the arp cache on the workstation. The `ping` command configures the IP address on the print server.

The LAN hardware address can require a specific format, as in the following examples:

- Windows XP, Server 2003, or Server 2008

```
arp -s 192.168.45.39      00-01-E6-a2-31-98
ping 192.168.45.39
```
- For UNIX

```
arp -s 192.168.45.39      00:01:E6:a2:31:98
ping 192.168.45.39
```

 **NOTE:** Once the IP address is set on the print server, additional `arp` and `ping` commands are ignored. To again use `arp` and `ping` to configure the IP address, reset the print server to factory values. See [Troubleshoot the HP Jetdirect print server on page 125](#).

On UNIX systems, the `arp -s` command can vary between different systems.

Some BSD systems expect the IP address (or host name) in reverse order. Other systems require additional parameters. See your system documentation for specific command formats.

If you are configuring an HP Jetdirect wireless print server, this section assumes that a wireless network connection is established.

Use Telnet (IPv4)

This section describes how to configure the print server using Telnet.

 **NOTE:** Telnet use and support depends on the print server product and the printer/MFP device in which it is installed. Telnet might not be supported on value-priced print servers.

If you are configuring an HP Jetdirect wireless print server, this section assumes that a wireless network connection is established.

Although you can protect a Telnet connection using an administrator password, Telnet connections are not secure. For networks with high security requirements, you can disable Telnet connections on the print server using TFTP, the HP Embedded Web Server, or HP Web Jetadmin.

Create a Telnet connection

To use Telnet commands with the HP Jetdirect print server, a route is required from your workstation to the print server. If the print server and your computer have a similar IP address (the network portion of their IPv4 addresses match), a route probably exists.

If the IPv4 addresses do not match, you can change your workstation's IPv4 address to match, or you can attempt to create a route to the print server. (If the print server is configured with a legacy default IP address such as 192.0.0.192, a route normally does not exist.)

 **CAUTION:** Using Telnet to manually set an IPv4 address overrides dynamic IP configuration, such as BOOTP, DHCP, and RARP, which results in a static configuration where IP values are fixed. This might prevent BOOTP, DHCP, or RARP from functioning correctly.

When manually changing an IP address, you should also re-configure the subnet mask and the default gateway.

On Windows systems, you can use the `route` command at a Windows command (DOS) prompt to create a route to the print server.

For information about system command prompts, see the Windows online help. On Windows XP, Server 2003, or Server 2008 systems, it is located in the **Accessories** folder in the **Programs** or **All Programs** folder.

To use the `route` command, you need the IPv4 address of your workstation. To display it, enter the appropriate command at the command prompt:

```
C:\> ipconfig (on Windows XP, Server 2003, or Server 2008)
```

To create a route from the system command prompt, use the following:

```
route add <Jetdirect IP Address> <system IP Address>
```


The <Jetdirect IP address> is the IP address configured on the HP Jetdirect print server, and <system IP address> is the IP address of the workstation's network card that is attached to the same physical LAN as the print server.

For example, to create a route from your workstation with IP address 169.254.2.1 to a print server with a default IP address of 192.0.0.192, enter the following:

```
route add 192.0.0.192 169.254.2.1
```

A typical Telnet session

Initiating a typical Telnet session is illustrated here.

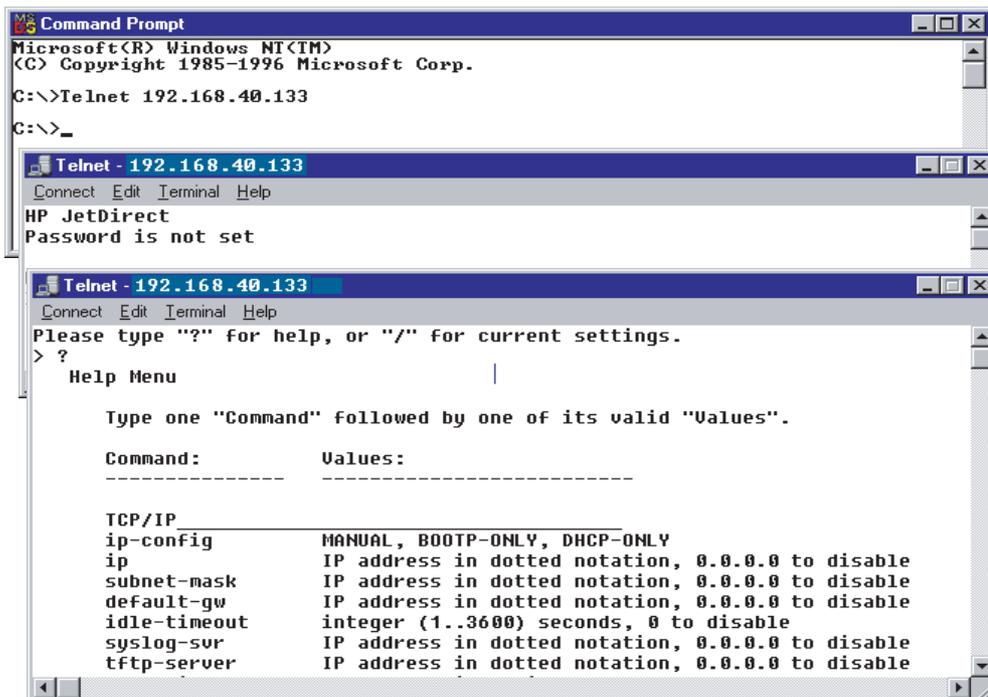

To set configuration parameters, you must set up a Telnet session from your system to the HP Jetdirect print server.

1. At the system prompt, type the following:

```
telnet <IP address>
```

The <IP address> is the IP address listed on the HP Jetdirect configuration page. See [HP Jetdirect configuration pages on page 135](#).

2. A connection to the HP Jetdirect print server is displayed. If the server responds with `connected to IP address`, press **Enter** twice to initialize the Telnet connection.
3. Type the user name and password, if required.

By default, the Telnet interface does not require a user name or password. If an administrator password is set, enter the user name and password. Otherwise, you cannot enter or save Telnet settings.

4. By default, a command line interface is provided. To set parameters using a menu interface, enter `Menu`. For more information, see [Telnet user interface options on page 43](#).

For a list of supported commands and parameters, see [Table 3-3 Telnet Commands and Parameters on page 43](#).

Telnet user interface options

The HP Jetdirect print server provides two interface options to enter Telnet commands: a [Telnet command line interface \(default\) on page 43](#) and a [Menu Interface on page 60](#).

Telnet command line interface (default)

Using the Telnet command line interface, you can set configuration parameters using the following procedures:

 **NOTE:** To view supported commands, formats, and parameters, type `?`.

To list additional (or advanced) commands, type `advanced` before entering `?`.

To display current configuration information, type `/`.

1. At the `>` Telnet prompt, type the following and press **Enter**:

```
<command parameter>: <value>
```

The `<command parameter>` signifies the configuration parameter, and `<value>` is the value assigned to that parameter. Follow each command entry with **Enter** (carriage return).

See [Table 3-3 Telnet Commands and Parameters on page 43](#) for configuration parameters.

2. Repeat the previous step to set any additional configuration parameters.
3. When you have finished setting the configuration parameters, type `exit` or `quit` (depending on your system).

Indicate whether to save any changes by entering `Y` (default) for Yes, or `N` for No.

If you enter `save` instead of `exit` or `quit`, you are not prompted to save settings.

Telnet commands and parameters. [Table 3-3 Telnet Commands and Parameters on page 43](#) lists the available Telnet commands and parameters.

 **NOTE:** If a parameter is dynamically provided by a BOOTP or DHCP server, you cannot change its value unless you set Manual configuration. See the `ip-config` command.

When you manually set an IP address, you should also re-set the subnet mask and default gateway.

Table 3-3 Telnet Commands and Parameters

Command	Description
User Control Commands	
<code>?</code>	Display the Help and Telnet commands.

Table 3-3 Telnet Commands and Parameters (continued)

/	Display current values.
menu	Display the Menu Interface on page 60 for use of the configuration parameters.
advanced	Enable advanced commands. Help (?) includes the advanced commands in the list.
general	Disable advanced commands. Help (?) does not include advanced commands (default).
save	Save the configuration values and exit the session.
exit	Exit the session.
export	Export the settings to a file for editing, and importing through Telnet or TFTP. (Only available on systems that support input/output redirection, such as UNIX.)
General	
passwd	<p>Password that allows administrators to control changes of HP Jetdirect print server configuration parameters using Telnet, the HP Embedded Web Server, or HP Web Jetadmin. For example, <code>passwd jd1234 jd1234</code> sets the password to <code>jd1234</code>. (You must enter the password <code>jd1234</code> twice for confirmation.)</p> <p>Enter up to 16 alphanumeric characters. Clear the password using a cold reset or enter the command without a password and confirmation entry.</p>
sys-location	Physical location of the device. Enter up to 255 alphanumeric characters.
sys-contact	Name of the network or device administrator. Enter up to 255 alphanumeric characters.
ssl-state	<p>Print server's security level for Web communications, using the following values:</p> <p>1: Enable forced redirection to the HTTPS port. Use only HTTPS (secure HTTP) communications.</p> <p>2: Disable forced redirection to HTTPS. Use both HTTP and HTTPS communications.</p>
security-reset	<p>Reset security settings on the print server to factory default values.</p> <p>0 (default): Do not reset.</p> <p>1: Reset.</p>
Wireless 802.11 Main	
network-type	<p>802.11g wireless network topology:</p> <p>Infrastructure: The print server communicates on the network with other wired or wireless devices through an access point.</p> <p>Ad Hoc: (default) The print server communicates with other wireless devices directly, without using an access point.</p>
desired-ssid	<p>Service set identifier (SSID), or network name, for the print server. Enter up to 32 alphanumeric characters.</p> <p>The factory-default SSID is <code>hpsetup</code> in ad hoc mode. Do not use the SSID <code>hpsetup</code> with the Infrastructure network type.</p> <p>If the <code>ssid</code> command is issued without an entry (a blank SSID), the desired SSID is assigned <code><AUTO></code>, where it associates with the first network that matches its authentication settings.</p>

Table 3-3 Telnet Commands and Parameters (continued)

<code>auth-type</code>	<p>Link-based authentication method for the print server (before network use is allowed).</p> <p><code>Open</code> (default): Use open system authentication if your wireless network does not require authentication for network use. However, your network might use WEP encryption keys for data security.</p> <p><code>Shared_Key</code>: Use shared key authentication if your network requires that each device be configured with the same secret WEP key for network use.</p> <p>Selecting Shared_Key is not valid with the <code>wpa-auth-type</code> command when setting WPA-PSK authentication.</p>
<code>server-auth</code>	<p>Use server-based authentication.</p> <p><code>EAP_TLS</code>: Use EAP-TLS authentication.</p> <p><code>LEAP</code>: Use LEAP authentication.</p> <p><code>NONE</code> (default): Do not use server-based authentication.</p> <p><code>PEAP</code>: Use PEAP authentication.</p>
<code>svr-auth-user</code>	802.1x server authentication user identity. Enter up to 128 characters.
<code>svr-auth-pass</code>	Server authentication password. Enter up to 128 characters.
<code>svr-auth-id</code>	Server authentication ID, using the form: [<code><server(host name string)></code>] The default value is <code>RIGHT_MOST</code> .
<code>wpa-auth-type</code>	<p>WPA-PSK authentication and dynamic wi-fi protected access (WPA) encryption. WPA-PSK provides enhanced authentication on networks where an authentication server is not used. (Not compatible with the shared key authentication option in the <code>auth-type</code> command.)</p> <p><code>NONE</code>: WPA-PSK authentication is not used.</p> <p><code>PSK</code>: Selects WPA-PSK authentication. A pre-shared key provides device authentication and is generated when you specify a network passphrase through the <code>psk-passphrase</code> command.</p>
<code>psk-passphrase</code>	Passphrase used to generate a network pre-shared key. A passphrase must be from 8 to 63 ASCII characters in the hexadecimal range 21 through 7E (characters 0–9, a–z, A–Z and numerous special characters including !, @, #, \$, %, ^, &, (,), _ , +, =, -, {, }, [,], \, /, ", <, >, ?, ", ', ~).
<code>encryption</code>	Use encryption. 0 (default): Disable. 1: Enable.
<code>wep-key-method</code>	<p>Format for WEP key entry. WEP key entries must be of the proper length.</p> <p><code>ASCII</code> (default): Use alphanumeric ASCII characters (0–9, a–z, A–Z). For 40/64-bit encryption, enter 5 characters. For 104/128-bit encryption, enter 13 characters. ASCII entries are case-sensitive.</p> <p><code>HEX</code>: Use hexadecimal digits (0–9, a–f, A–F). For 40/64-bit encryption, enter 10 hexadecimal digits. For 104/128-bit encryption, enter 26 hexadecimal digits. HEX entries are not case-sensitive.</p>

Table 3-3 Telnet Commands and Parameters (continued)

wep-key	<p>Static WEP encryption key. The print server can store up to four WEP keys using four key positions (Key 1, 2, 3, 4). To enter a WEP key, specify the key position followed by the encryption key value, as in the following example:</p> <pre>wep-key 1 0123456789net</pre> <p>In the example, Key 1 is assigned with a with a 128-bit WEP key specified by the value 0123456789net.</p> <p>You can use the <code>wep-key-method</code> command to specify the format of the key value (hexadecimal digits, or alphanumeric ASCII characters). Alternatively, you can insert an optional parameter (ASCII or HEX) after the key position, as in the following example:</p> <pre>wep-key 1 ASCII 0123456789net</pre> <p>In the example, Key 1 is assigned a 128-bit WEP key specified by the alphanumeric ASCII characters 0123456789net.</p> <p>When assigning static WEP keys, ensure that key positions and key values match other wireless devices on the network. Ensure that all key values entered are of the same length, and that WEP key lengths use the proper number of characters or digits.</p>
transmit-key	<p>WEP key position (1, 2, 3, 4) that the print server uses for encrypted communications, as in the following example:</p> <pre>transmit-key 2</pre> <p>In the example, Key 2 is used for encrypted communications, matching other devices on the network. The default value is 1.</p>
dynamic-encrypt	<p>802.1x dynamic encryption. Set to: NONE (default), BASIC, AUTO, WPA, or WPA2.</p>
desired-channel	<p>(Ad hoc only) Specify a desired channel that the print server uses for ad hoc network association requests. The default is channel 11.</p> <p>10: Use channel 10 (2457 MHz).</p> <p>11: Use Channel 11 (2462 MHz).</p> <p>The print server uses this channel to broadcast its availability if it fails to detect and associate with the specified ad hoc network on any channel.</p>
dot11-switch-time	<p>Specify the time (0 - 120 seconds) for the print server to enable its 802.11 wireless port when its 10/100TX wired port is disconnected from the network.</p>
roam-threshold	<p>Specify the wireless signal strength level where the print server seeks an access point that provides a stronger signal strength. Select from the following levels:</p> <p>2 (Default): Sets the threshold to a weak signal.</p> <p>1: Sets the threshold to a very weak signal.</p> <p>0: Sets the threshold to where there is no detected signal.</p> <p>When the print server is associated with a particular access point, it remains with that access point until the specified threshold level is reached. Setting the threshold level to 0 or 1 can prevent or limit the print server from roaming.</p>
802.11 Wireless Diagnostics	
Current SSID	<p>(Read-only parameter) The network name (SSID) to which the wireless print server is connected.</p>

Table 3-3 Telnet Commands and Parameters (continued)

Current Channel	(Read-only parameter) The channel that the wireless print server is currently using.
Signal Strength	(Read-only parameter) Strength of the radio signal received by the print server. <blank>: No radio signal detected while the print server is scanning. No Signal: No radio signal detected on any channel. Poor/Marginal/Good/Excellent: Detected signal strength level.
Access Point Mac	(Read-only parameter) The media access control (MAC) address of the access point used for Infrastructure mode communications, as in the following example: 00:a0:f8:38:7a:f7 In this example, the access point with MAC address 00a0f8387af7 is used for communicating on the network.
TCP/IP Main	
llmnr	Link local multicast name resolution (LLMNR). 0: Disable. 1 (default): Enable.
host-name	Name of the network device. Enter up to 32 alphanumeric characters. For example, host-name printer1 assigns the name printer1 to the device. The default host name is NPIxxxxxx, where xxxxxx are the last six digits of the LAN hardware (MAC) address.
ip-config	Print server configuration method. Use the following values: manual: Wait for IP parameters using manual tools, such as Telnet, the HP Embedded Web Server, the control panel, or installation/management software. Status is User Specified. bootp: Send BOOTP requests on the network for dynamic IP configuration. dhcp: Send DHCP requests on the network for dynamic IP configuration. auto_ip: Automatically configure with a unique link-local address 169.254.x.x.
ipsec-config firewall-config	NOTE: The ipsec-config command is available on print servers that support both IPsec and Firewall configuration. The firewall-config command is available on full-featured print servers that do not support IPsec, but allow Firewall configuration. Disable IPsec or Firewall operation on the print server after IPsec/Firewall policies are configured and enabled. You cannot enable IPsec/Firewall operation using this command. Instead, use the HP Embedded Web Server to configure and enable IPsec/Firewall polices. 0: Disable IPsec/Firewall operation. 1: (Read Only) IPsec/Firewall policies are configured and enabled.

Table 3-3 Telnet Commands and Parameters (continued)

<code>ip</code>	<p>IP address for the print server. For example:</p> <pre>ip-config manual ip 192.168.45.39</pre> <p>In the example, <code>manual</code> signifies manual configuration and <code>ip</code> sets the IP address on the print server.</p> <p>To clear the IP address, set the value to 0.0.0.0.</p> <p>If you change this IP address, you must use it on the next Telnet connection.</p>
<code>subnet-mask</code>	<p>Identify the network and host portions of an IPv4 address in received messages. For example:</p> <pre>subnet-mask 255.255.255.0</pre> <p>In the example, 255.255.255.0 is stored on the print server. To clear the subnet IP address and disable the mask, set the value to 0.0.0.0.</p> <p>NOTE: If the HP Jetdirect print server is configured by DHCP and you manually change the subnet mask or the default gateway address, you should also change the print server's IP address. This releases the assigned DHCP address back to the DHCP IP address pool.</p>
<code>default-gw</code>	<p>IP address of a default gateway used by the print server. For example:</p> <pre>default-gw 192.168.40.1</pre> <p>In the example, 192.168.40.1 is the IP address of the default gateway.</p> <p>NOTE: If the HP Jetdirect print server is configured by DHCP and you manually change the subnet mask or the default gateway address, you should also change the print server's IP address. This releases the assigned DHCP address back to the DHCP IP address pool.</p>
<code>parm-file</code>	<p>Path and file name whose contents are printed each time the print server is turned on. Enter up to 64 alphanumeric characters.</p>
<code>Config Server</code>	<p>(Read only.) IP address of the server (such as a BOOTP or DHCP server) that last configured the IP address on the HP Jetdirect print server.</p>
<code>TFTP Server</code>	<p>(Read only.) IP address of the TFTP server that provided parameters to the HP Jetdirect print server.</p>
<code>TFTP Filename</code>	<p>(Read only.) Path and TFTP filename on the TFTP server. For example:</p> <pre>hnpnp/printer1.cfg</pre>
<code>domain-name</code>	<p>Domain name for the device. For example:</p> <pre>domain-name support.hp.com</pre> <p>In the example, <code>support.hp.com</code> is assigned as the domain name.</p> <p>The domain name does not include the host name, and is not the FQDN (such as <code>printer1.support.hp.com</code>).</p>
<code>pri-dns-svr</code>	<p>IP address of the primary DNS server.</p>
<code>sec-dns-svr</code>	<p>IP address of a secondary DNS server to use if the primary DNS server is unavailable.</p>
<code>pri-wins-svr</code>	<p>IP address of the primary WINS server.</p>
<code>sec-wins-svr</code>	<p>IP address of the secondary WINS server.</p>

Table 3-3 Telnet Commands and Parameters (continued)

TCP/IP Print Options	
9100-printing	Print to TCP port 9100 on the print server. 0: Disable. 1 (default): Enable.
ftp-printing	Print through FTP (TCP ports 20, 21). 0 Disable. 1 (default): Enable.
ws-printing	Print through WS. 0 (default): Disable. 1: Enable.
ipp-printing	print using IPP (TCP port 631). 0 Disable. 1 (default): Enable.
lpd-printing	Print using LPD (TCP port 515). 0 Disable. 1 (default): Enable.
banner	Print an LPD banner page. 0 Disable. 1 (default) Enable.
ipp-job-acct	Use job accounting for IPP printing. 0 Disable. 1 (default): Enable.
interlock	Require an acknowledgement (ACK) on all TCP packets before the printer can close a port 9100 print connection. Specify a port number and parameter value. For the HP Embedded Web Server on the HP Jetdirect print server, the default port number is 1. In the following example, the port is 1 and interlock is enabled: <code>interlock 1 1</code> 0 (default): Disable interlock. 1: Enable.
mult-tcp-conn	Allow multiple TCP connections (restrict the use of multiple ports). 0 (default): Enable multiple connections. 1: Disable multiple connections (allow only one connection).
buffer-packing	Pack the data buffer on TCP/IP packets before sending. 0 (default): Enable. Pack the data buffer before sending to the printer. 1: Disable. Data is sent to the printer as it is received.

Table 3-3 Telnet Commands and Parameters (continued)

<code>write-mode</code>	Set the TCP PSH flag for device-to-client data transfers. 0 (default): Disable. 1: Enable the all-push option, which sets the push bit in all data packets.
-------------------------	---

TCP/IP LPD Queues

<code>addq</code>	Add a user-defined queue. Specify the queue name, prepend string name, append string name, and the processing queue (typically, RAW) in the command line. Enter up to 32 alphanumeric characters. Add up to six user-defined queues. CAUTION: Do not use lowercase and uppercase characters to differentiate queue names. Management of LPD queues by other tools can cause unpredictable results.
<code>deleteq</code>	Set a user-defined deletion queue. Specify the queue name in the <code>deleteq</code> command line.
<code>defaultq</code>	Set the queue name to use when the specified queue for a print job is unknown. The default queue name is: <code>AUTO</code>
<code>addstring</code>	Specify a user-defined character string to prepend or append to print data. You can add up to eight character strings. Specify the string name and the character string in the <code>addstring</code> command line.
<code>deletestring</code>	Set a user-defined deletion string. Specify the string name in the <code>deletestring</code> command line.

TCP/IP Raw Print Ports

<code>raw-port</code>	Additional ports for printing to TCP port 9100. Valid ports are application dependent and range between 3000 to 9000. You can add up to two ports.
-----------------------	--

TCP/IP Access Control

<code>allow</code>	Add an entry into the host access list stored on the HP Jetdirect print server. Each entry specifies a host or network of hosts allowed to connect to the printer. The format is <code>allow netnum [mask]</code> where <code>netnum</code> is a network number or host IP address, and <code>mask</code> is an address mask of bits applied to the network number and host address to verify access. Add up to 10 access list entries. If there are no entries, all hosts are permitted access. The following are some example settings: <code>allow 192.0.0.0 255.0.0.0</code> Allows hosts on network 192. <code>allow 192.168.1.2</code> Allow a single host. The default mask 255.255.255.255 is assumed and is not required. <code>allow 0</code> Clear the host access list. For additional information, see Security features (V.40.xx) on page 121 .
--------------------	---

TCP/IP Other

<code>syslog-config</code>	Allow syslog server operation on the print server (UDP port 514). 0: Disable. 1 (default): Enable.
----------------------------	--

Table 3-3 Telnet Commands and Parameters (continued)

<code>syslog-svr</code>	IPv4 address of the server that the HP Jetdirect server sends syslog messages to. For example: <code>syslog-svr: 192.168.40.1</code>
<code>syslog-max</code>	Maximum number of syslog messages the HP Jetdirect print server can send per minute. 0: Disable. The number of syslog messages is not restricted. 10 (default): Enable.
<code>syslog-priority</code>	Filter syslog messages sent to the syslog server. The filter range is from 0 to 7, with 0 being the most specific and 7 the most general. Only messages that are lower than the specified filter level (or higher in priority) are reported. Set to 8 to disable all syslog messages. 0: Disable. 7 (default): Enable. Messages of all priorities are sent.
<code>syslog-facility</code>	Identify the source facility of a message. Typically used to identify the source of selected messages during troubleshooting. By default, the HP Jetdirect print server uses <code>LPR</code> as the source facility code. Use values of <code>local0</code> through <code>local7</code> to isolate individual or groups of print servers.
<code>slp-config</code>	Use the SLP operation on the print server. SLP is used by selected HP software applications (through UDP port 427) to automate device discovery. 0: Disable. 1 (default): Enable. If SLP uses multicast protocols, you must enable multicast IPv4.
<code>slp-keep-alive</code>	Time (in minutes) the print server waits to send multicast packets on the network to prevent deletion from network device tables. Some infrastructure devices, such as switches, delete devices from their device tables due to inactivity on the network. 0: Disable. 1 to 1440: Enable.
<code>syslog-protocol</code>	Use the TCP or UDP port for syslog communication when logging security events. 6: <code>PROTO_TCP</code> . 17 (default): <code>PROTO_UDP</code> .
<code>syslog-port</code>	Valid port number of the TCP or UDP port for syslog communication when logging security events. The valid range is from 1 to 65535. The default port number is 514.
<code>bonjour-config</code>	Use Bonjour. (Previously listed as multicast domain name system [mDNS services].) Bonjour is typically used for IP address and name resolution, through UDP port 5353, where a conventional DNS server is not available. 0: Disable. 1 (default): Enable. To use Bonjour operation, you must enable multicast IPv4 (<code>ipv4-multicast</code>).

Table 3-3 Telnet Commands and Parameters (continued)

<code>bonjour-svc-name</code>	Bonjour service name. This name is persistent and is used to resolve a particular device or service if socket information (such as the IP address) changes from session to session. Apple Bonjour displays this service. The default service name is the printer model and the LAN hardware (MAC) address. Enter up to 64 alphanumeric characters.
Bonjour Domain Name	(Read only.) Bonjour domain name assigned to the device, in the form <host name>.local. If a user-specified host name is not assigned, the default host name NPIxxxxxx is used, where xxxxxx are the last 6 digits of the LAN hardware (MAC) address.
<code>bonjour-pri-svc</code>	Highest priority Bonjour service to use for printing. Set this parameter using the following values: 1: Port 9100 printing 2: IPP port printing 3: Default LPD raw queue 4: Default LPD text queue 5: Default LPD auto queue 6: Default LPD bins (binary PostScript) queue 7 through 12: If user-specified LPD queues are defined, corresponds to user-specified LPD queues 5 through 10. Although the default selection depends on the printer, it is typically Port 9100 printing or LPD bins.
<code>ftp-download</code>	Download firmware upgrade files to the print server, using FTP. 0: Disable. 1 (default): Enable.
<code>ttn-slp</code>	IP multicast time-to-live (TTL) setting for SLP packets. The default value is 4 hops (the number of routers from the local network). Set from 1 to 15 hops. -1: Disable. 4 (default): Enable multicast TTL.
<code>ipv4-multicast</code>	Receive and transmit IP version 4 multicast packets by the print server. 0: Disable. 1 (default): Enable. NOTE: If disabled, other protocols that use multicast protocols, such as Bonjour and SLP, might also be disabled without notification.
<code>idle-timeout</code>	Seconds that an idle print data connection can remain open. Set from 1 to 3600 seconds. 0: Disable. Connection does not terminate. Other hosts cannot make a connection. 270 (default): Enable.

Table 3-3 Telnet Commands and Parameters (continued)

<code>user-timeout</code>	<p>Seconds that a Telnet or FTP session is idle before it is automatically disconnected. Set from 1 to 3600 seconds.</p> <p>0: Disable.</p> <p>900 (default): Enable.</p> <p>CAUTION: Setting this to a short time period might disable Telnet/FTP, because a session could terminate before changes can be made.</p>
<code>cold-reset</code>	<p>Reset to TCP/IP factory default settings after a cold reset. (Parameters for other subsystems, such as IPX/SPX or AppleTalk, are not affected.)</p> <p>0: Disable. Retain TCP/IP settings after a cold reset.</p> <p>1: Enable. Restore factory default TCP/IP settings.</p>
<code>icmp-ts-config</code>	<p>ICMPv4 time stamp requests.</p> <p>0 (default): Disable</p> <p>1: Enable</p>
<code>ews-config</code>	<p>Allow use of the HP Embedded Web Server on the HP Jetdirect print server.</p> <p>0 Disable.</p> <p>1 (default): Enable.</p> <p>For more information, see HP Embedded Web Server (V.40.xx) on page 64.</p>
<code>web-refresh</code>	<p>Time interval for the HP Embedded Web Server diagnostic page updates. Set from 1 to 99999 seconds.</p> <p>0: Disable.</p>
<code>tcp-mss</code>	<p>Maximum segment size (MSS) that the HP Jetdirect print server advertises for use when communicating with local subnets (Ethernet MSS=1460 bytes or more) or remote subnets (MSS=536 bytes).</p> <p>0 (default): All networks are assumed to be local (Ethernet MSS=1460 bytes or more).</p> <p>1: Use MSS=1460 bytes (or more) for subnets, and MSS=536 bytes for remote networks.</p> <p>2: All networks are assumed to be remote (MSS=536 bytes), except the local subnet.</p> <p>MSS affects performance by preventing IP fragmentation that can result in data retransmission.</p>
<code>tcp-msl</code>	<p>Maximum segment life (MSL) in seconds. Set from 5 to 120 seconds.</p> <p>0: Disable.</p> <p>15 (default): Enable.</p>
<code>gw-disable</code>	<p>Automatically assign the device IP address as the gateway when a network gateway is not configured.</p> <p>0: Assign a gateway using the device IP address.</p> <p>1: Do not assign a gateway. The gateway address 0.0.0.0 is configured.</p>

Table 3-3 Telnet Commands and Parameters (continued)

<code>default-ip</code>	<p>IP address to use when the print server is unable to obtain an IP address from the network during a forced TCP/IP re-configuration. For example, when turned off and then on, or manually configured to use BOOTP/DHCP.</p> <p><code>DEFAULT_IP</code>: Set the legacy default IP address 192.0.0.192.</p> <p><code>AUTO_IP</code>: Set a link-local IP address 169.254.x.x.</p> <p>The initial setting is determined by the IP address obtained when first turned on.</p>
<code>default-ip-dhcp</code>	<p>Periodically transmit DHCP requests when a legacy default IP address of 192.0.0.192 or a link-local IP address of 169.254.x.x is automatically assigned.</p> <p>0: Disable DHCP requests.</p> <p>1 (default): Enable DHCP requests.</p>
<code>duid</code>	<p>DHCP unique identifier for a client, using a hexadecimal string to represent up to 260 characters.</p>
<code>dns-cache-ttl</code>	<p>Time-to-live for a cached DNS name, in seconds. Set from 0 to 4294967295 seconds. Names are not cached. 0: Disable.</p>
<code>dhcp-arbitration</code>	<p>Amount of time, in seconds, that the print server waits for DHCP configuration offers. Set from 1 to 10 seconds.</p> <p>0: Disable.</p> <p>5 (default): Enable.</p>
<code>stateless-dhcpv4</code>	<p>Allow automatic configuration of additional IP parameters from a DHCPv4 server even when the print server is statically configured (such as a manually configure IP address, subnet mask and default gateway).</p> <p>0 Disable.</p> <p>1 (default): Enable.</p>
TCP/IP Diagnostics	
<code>Last Config IP</code>	<p>(Read-only parameter.) IP address of the system from which the HP Jetdirect print server's IP address was configured.</p>
<code>TCP Conns Refused</code>	<p>(Read-only parameter.) Number of client TCP connections that are refused by the print server.</p>
<code>TCP Access Denied</code>	<p>(Read-only parameter.) Number of times that client systems were denied access to the print server because the print server's host access list does not contain an allowable entry.</p>
<code>DHCP Lease Time</code>	<p>(Read-only parameter.) DHCP IP address lease duration time (seconds).</p>
<code>DHCP Renew Time</code>	<p>(Read-only parameter.) DHCP T1 timeout, specifying the DHCP lease renewal time in seconds.</p>
<code>DHCP Rebind Time</code>	<p>(Read-only parameter.) DHCP T2 timeout, specifying the DHCP lease rebind time in seconds.</p>
SNMP	

Table 3-3 Telnet Commands and Parameters (continued)

snmp-config	<p>SNMP operation on the print server.</p> <p>CAUTION: Disabling SNMP disables all SNMP agents (SNMP v1, v2, v3) and communications with management applications, such as HP Web Jetadmin. In addition, firmware upgrades through current HP downloading utilities is disabled.</p> <p>0: Disable.</p> <p>1 (default) Enable.</p>
get-cmnty-name	<p>Optional. Password to determine which SNMP GetRequests the HP Jetdirect print server responds to. If a Get community name is set, the print server responds to either a user-specified community name or the factory-default. Enter up to 255 alphanumeric characters.</p>
set-cmnty-name	<p>Password to determine which SNMP SetRequests (control functions) the HP Jetdirect print server responds to. The community name of an incoming SNMP SetRequest must match the print server's set community name for the print server to respond. (For additional security, you can limit configuration access through the print server's host access list.) Enter up to 255 alphanumeric characters.</p>
default-get-cmnty	<p>Default Get community name.</p> <p>0 Disable.</p> <p>1 (default): Enable.</p> <p>Disabling this parameter can prohibit communications with SNMP management applications.</p>
SNMP Traps	
auth-trap	<p>Send SNMP authentication traps. Authentication traps indicate that an SNMP request was received, but the community name check failed.</p> <p>0 Disable.</p> <p>1 (default) Enable.</p>
trap-dest	<p>Add a host's IP address to the HP Jetdirect print server's SNMP trap destination list. The list can contain up to six entries. To receive SNMP traps, the listed systems must have a trap daemon that listens for the traps. The following is the command format:</p> <pre>trap-dest: <ip-address> [community name] [port number]</pre> <p>In the example, <ip-address> is the IP address of the host to receive traps, [community name] specifies the SNMP community name, and [port number] identifies the port number to use.</p> <p>The default community name is public. The default SNMP port number is 162. You must enter a community name to specify a port number.</p> <p>To delete the list, set trap destination to zero (trap-dest: 0).</p> <p>By default, the SNMP trap destination list is empty and the print server does not send SNMP traps.</p>

IPX/SPX

Table 3-3 Telnet Commands and Parameters (continued)

<code>ipx-config</code>	<p>IPX/SPX protocol operation on the print server.</p> <p>0 Disable.</p> <p>1 (default): Enable.</p> <p>NOTE: On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.</p>
<code>ipx-unitname</code>	Name assigned to the print server. Enter up to 31 alphanumeric characters. By default, the name is NPIxxxxxx, where xxxxxx are the last six digits of the LAN hardware address.
Address	(Read-only parameter.) The IPX network and node numbers detected on the network, in the form <network number>:<LAN hardware address>.
<code>ipx-frametype</code>	IPX frame type settings available for your print server model: <code>AUTO</code> (default), <code>EN_SNAP</code> , <code>EN_8022</code> , <code>EN_8023</code> , <code>EN_II</code> . For more information, see HP Jetdirect configuration pages on page 135 .
<code>ipx-sapinterval</code>	<p>Time in seconds that the HP Jetdirect print server waits between service advertising protocol (SAP) broadcasts on the network. Set from 1 to 3600 seconds.</p> <p>0: Disable.</p> <p>60 (default): Enable SAP broadcasts.</p>
<code>ipx-mode</code>	(Read-only parameter.) NetWare mode configured on the print server (<code>RPRINTER</code> or <code>QSERVER</code>).
<code>ipx-nds-tree</code>	NDS tree name for the print server. Enter up to 31 alphanumeric characters.
<code>ipx-nds-context</code>	NDS context for the HP Jetdirect print server. Enter up to 256 alphanumeric characters.
<code>ipx-job-poll</code>	<p>Specifies the time interval in seconds that the HP Jetdirect print server waits to check for print jobs in a print queue. Set from 1 to 255 seconds.</p> <p>0: Disable.</p> <p>2 (default): Enable.</p>
<code>pjl-banner</code> (<code>ipx-banner</code>)	<p>Print an IPX banner page through PJI.</p> <p>0: Disable.</p> <p>1 (default): Enable banner pages.</p>
<code>pjl-eoj</code> (<code>ipx-eoj</code>)	<p>IPX end-of-job notification through PJI.</p> <p>0: Disable.</p> <p>1 (default): Enable.</p>
<code>pjl-toner-low</code> (<code>ipx-toner-low</code>)	<p>IPX toner-low notification through PJI.</p> <p>0: Disable.</p> <p>1 (default): Enable.</p>
AppleTalk	

Table 3-3 Telnet Commands and Parameters (continued)

appletalk	Use AppleTalk (EtherTalk) protocol operation on the print server. 0: Disable. 1 (default): Enable. NOTE: On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.
Name	(Read-only parameter.) Name of the printer on the AppleTalk network. A number after the name indicates that this is the Nth instance of the name.
Print Type	(Read-only parameter.) AppleTalk network printer type reported by the HP Jetdirect print server. Up to three print types can be reported.
Zone	(Read-only parameter.) Name of the AppleTalk network zone on which the printer is located.
Phase	(Read-only parameter.) AppleTalk phase 2 (P2) is pre-configured on the HP Jetdirect print server.
Status	(Read-only parameter.) Current AppleTalk configuration status. READY: HP Jetdirect print server is awaiting data. DISABLED: AppleTalk was manually disabled. INITIALIZING: Print server is registering the node address or name. An additional status message might also be displayed.
DLC/LLC	
dlc/llc-config	Use DLC/LLC protocol operation on the print server (if supported). 0: Disable. 1 (default): Enable. NOTE: On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.
strict-8022	Controls DLC/LLC protocol interpretation: 0 (default): Disable. Provide loose interpretation. 1: Enable. Provide strict interpretation.
Other	

Table 3-3 Telnet Commands and Parameters (continued)

upgrade	<p>Set the name and location of the firmware upgrade file for the HP Jetdirect print servers.</p> <p>CAUTION: Ensure that command parameters are properly entered and that the upgrade file is a higher version than the currently installed version. The print server attempts to upgrade if the upgrade file contains a higher version than the installed version.</p> <p>The following is the command format:</p> <pre>upgrade: <TFTP server IP> <Version> <Product Number> <Filename></pre> <p>The following defines the parameters:</p> <p><TFTP Server IP> IP address of the TFTP server, <Version> firmware version of the upgrade file, <Product Number> print server product number <Filename> path and filename of the firmware upgrade file.</p>
laa	<p>Specify a locally administered address (LAA) to replace the factory-assigned LAN hardware (MAC) address. If LAA is used, enter a string of exactly 12 hexadecimal digits.</p> <p>For Ethernet print servers, the LAA must start with hexadecimal X2, X6, XA, or XE, where X is any hexadecimal digit 0 through F.</p> <p>The default address is the factory-assigned address.</p>
xml-services-conf	<p>Allow access by HP Web service applications to XML-based data on the HP Jetdirect print server.</p> <p>0: Disable.</p> <p>1 (default): Enable.</p>
ws-discovery-conf	<p>Allow Microsoft WS discovery protocols on the print server.</p> <p>1 (default): Enable.</p> <p>0: Disable.</p>
1000t-ms-conf	<p>Configure the print server as a master or slave device on a 1000T network.</p> <p>AUTO or 0 (default): Master/slave configuration is automatically sensed and assigned.</p> <p>MASTER or 1: Configure as a 1000T master device.</p> <p>SLAVE or 2: Configure as a 1000T slave device.</p>
1000t-pause-conf	<p>Control the flow of inbound and outbound data.</p> <p>OFF or 0 (default): Disable flow control.</p> <p>AUTO or 1: Configure through auto-negotiation with the network switch.</p> <p>RCV or 2: Enable only for data received from the network.</p> <p>TRANS or 3: Enable only for data transmitted to the network.</p> <p>TXRX or 4: Enable for both received and transmitted data.</p>

Table 3-3 Telnet Commands and Parameters (continued)

<code>network-select</code>	<p>(For HP Jetdirect products with a dual wired/wireless port. Specifies the active behavior of the print server.)</p> <ul style="list-style-type: none">• <code>Auto</code> (default): Automatically detects whether a network cable is attached. If a network cable is not attached, only the IEEE 802.11g wireless port is active. If a network cable is attached, then only the IEEE 802.3 wired port is active. <p>CAUTION: Do not plug a network cable into an active wired/wireless port if the <code>network-select</code> command is set to <code>Auto</code>. Wireless access will immediately terminate.</p> <ul style="list-style-type: none">• <code>Wired</code>: Only the 802.3 wired port is active.• <code>Wireless</code>: Only the 802.11g wireless port is active.
<code>link-type</code>	<p>(For wired 10/100/1000T Ethernet.) Set the print server's link speed (10, 100, 1000 Mbps) and communication mode (Full- or Half-Duplex). The available link-speed depends on the print server model. Select from the following communication modes:</p> <p><code>AUTO</code> (default): Use auto-negotiation to configure the highest link speed and communication mode allowed.</p> <p><code>1000FULL</code>: 1000 Mbps, full-duplex operation.</p> <p><code>100AUTO</code>: Limit auto-negotiation to a maximum link speed of 100 Mbps.</p> <p><code>100FULL</code>: 100 Mbps, full-duplex operation.</p> <p><code>100HALF</code>: 100 Mbps, half-duplex operation.</p> <p><code>10FULL</code>: 10 Mbps, Full-duplex operation.</p> <p><code>10HALF</code>: 10 Mbps, half-duplex operation.</p>
<code>usb-mode</code>	<p>Communication mode over the USB port on the HP Jetdirect print server.</p> <ul style="list-style-type: none">• <code>Auto</code> (default): Automatically negotiate and set the highest communication mode possible for the attached printer or device.• <code>MLC</code>: HP proprietary (multiple logical channels) mode that allows multiple channels of simultaneous print, scan, and status communication.• <code>BIDIR</code>: Standard connection that supports bi-directional communication between the printer and print server.• <code>UNIDIR</code>: Standard connection in which data is transferred in one direction only (to the printer).
<code>usb-speed</code>	<p>(Read-only parameter, USB 2.0 products only.) Auto-negotiated communication speed over the USB connection between the HP Jetdirect print server and the device.</p> <ul style="list-style-type: none">• <code>Full Speed</code>: 12 Mbits/sec as specified in the USB v2.0 specifications, compatible with USB v1.1 specifications.• <code>Hi-Speed</code>: 480 Mbits/sec for USB v2.0 devices only.• <code>Disconnected</code>: USB port is not connected.
<code>hw-acclrn-conf</code>	<p>Use hardware acceleration.</p> <p>0: Disable.</p> <p>1 (default): Enable.</p>

Table 3-3 Telnet Commands and Parameters (continued)

<code>status-page-lang</code>	Printer job language (PJM) that the print server uses to send the HP Jetdirect configuration/status page to the printer. <ul style="list-style-type: none"> • <code>Auto</code> (default): PJM is auto-detected when the print server is turned on or after a cold reset. • <code>PCL</code>: HP Printer Control Language • <code>ASCII</code>: Standard ASCII characters • <code>HPGL2</code>: HP graphics language (v2) • <code>PS</code>: Postscript language
<code>job-timeout</code>	(External print servers only.) Number of seconds after which an idle connection to the printer is closed, for example through the USB port. The range is from 30 to 4294967295 seconds. If set to zero (0), the default value of 270 seconds is used.
Support	
<code>Web JetAdmin URL</code>	(Read-only parameter.) If HP Web Jetadmin discovers this device, the URL to access HP Web Jetadmin is specified.
<code>Web JetAdmin Name</code>	(Read-only parameter.) If HP Web Jetadmin discovers this device, the name of the HP Web Jetadmin host is specified (if known).
<code>support-contact</code>	Name of a person to contact for support of this device.
<code>support-number</code>	Phone or extension number to call for support of this device.
<code>support-url</code>	Web URL address for product information on this device over the Internet or an intranet.
<code>tech-support-url</code>	Web URL address for technical support over the Internet or an intranet.

Menu Interface

An optional Menu interface is displayed when you type the `menu` command during a Telnet session with the HP Jetdirect print server. The Menu interface provides structured menu lists for easy access to configuration parameters.


[Figure 3-1 Example: Using the Menu Interface on page 61](#) illustrates the Menu interface, using the TCP/IP menus as an example.

- From the `Main Menu` screen, select and enter a menu number. If there are submenus, select and enter a submenu number.
- To change a setting, enter `Y` (for Yes) when prompted.

Edit the setting, using the `Backspace` key. If you enter an unrecognized value, the correct entry options are displayed.

 **NOTE:** Changes are not saved on the HP Jetdirect print server until you exit a menu and choose to save your changes.

Figure 3-1 Example: Using the Menu Interface

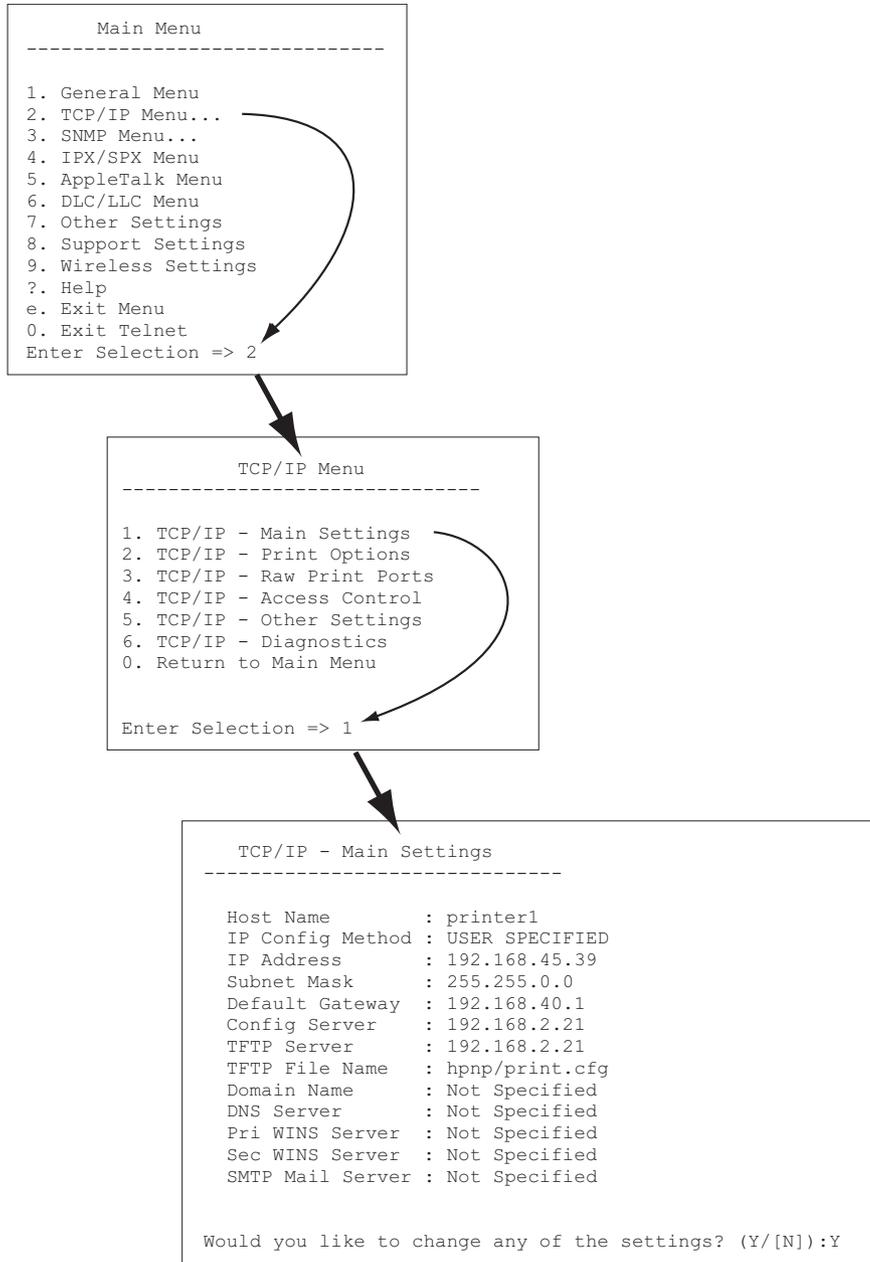

To edit these parameters, enter **Y**. Use the **Backspace** key to edit the parameters.

Changes are not saved until you save them when you exit the session.

Use Telnet to remove an IP address

To erase the IP address during a Telnet session, use the following command line entries:

1. Type `cold-reset`, then press **Enter**.
2. Type `quit`, then press **Enter** to exit Telnet.
3. Turn the print server off and then on.

 **NOTE:** This procedure resets all TCP/IP parameters. Parameters for other subsystems such as IPX/SPX or AppleTalk are not affected.

To reset all parameters to factory default values, see [Troubleshoot the HP Jetdirect print server on page 125](#).

Move to another network (IPv4)

When moving an HP Jetdirect print server that is configured with an IP address to a new network, make sure that the IP address does not conflict with addresses on the new network. You might need to change the IP address of the print server, or remove the current IP address and configure another address after it is installed. See [Troubleshoot the HP Jetdirect print server on page 125](#) for instructions to reset the print server to factory default settings.

 **NOTE:** If you use an HP Jetdirect wireless print server, this section assumes that a wireless network connection is established.

Moving an HP Jetdirect wireless print server to another network requires a new wireless connection to that network.

If the current BOOTP server is not reachable, you might configure the print server to use a different BOOTP server.

If the print server was configured using BOOTP, DHCP, or RARP, update the appropriate system files. If the IP address was manually set (from the printer control panel or Telnet), reconfigure IP parameters as described in this chapter.

Use the HP Embedded Web Server

You can use the HP Embedded Web Server on the HP Jetdirect print server to configure or view IPv4 and IPv6 parameters. For more information, see [HP Embedded Web Server \(V.40.xx\) on page 64](#).

Use the printer control panel

HP Jetdirect EIO or embedded print servers provide a configuration menu that you can open from the printer's control panel. Using this menu, you can enable or disable network protocols and set basic network parameters.

 **NOTE:** Control panel configuration support of specific IPv4/IPv6 and IPsec networking parameters depends on the HP Jetdirect print server and printer.

For instructions about using the control panel for your printer, see your printer documentation.

When accessing the HP Jetdirect menu from the printer's control panel, some TCP/IP network configuration parameters that you can set include the following (see [HP Jetdirect control panel menus \(V.40.xx\) on page 177](#) for additional parameters):

- IP host name
- TCP/IPv4 settings
- TCP/IPv6 settings
- Other network protocols (IPX/SPX, AppleTalk, DLC/LLC)

- Security settings
- Link configuration settings

To configure TCP/IP parameters not available from the control panel configuration, use an alternate configuration tool, such as Telnet/IPv4 or the HP Embedded Web Server.

If the HP Jetdirect print server is configured with TCP/IP parameters from the printer control panel, the configuration is saved on the print server when turned off and then on.

4 HP Embedded Web Server (V.40.xx)

HP Jetdirect print servers contain the HP Embedded Web Server, which is accessible from a compatible Web browser over an intranet. The HP Embedded Web Server provides access to configuration and management pages for the HP Jetdirect print server and the attached network device, such as a printer or multifunction peripheral (MFP) device.


Tabs across the upper portion of your browser window provide access to device and networking pages. The tabs and functions displayed vary depending on the capabilities of the device and the HP Jetdirect print server firmware version.

For a description of the device pages, see the HP Embedded Web Server documentation supplied with your printer or MFP device.

The **Networking** tab is displayed and controlled by the HP Jetdirect print server.

A typical **Networking** tab displayed by the HP Jetdirect print server is shown in [Figure 4-1 HP Jetdirect Networking Tab on page 64](#).

Figure 4-1 HP Jetdirect Networking Tab

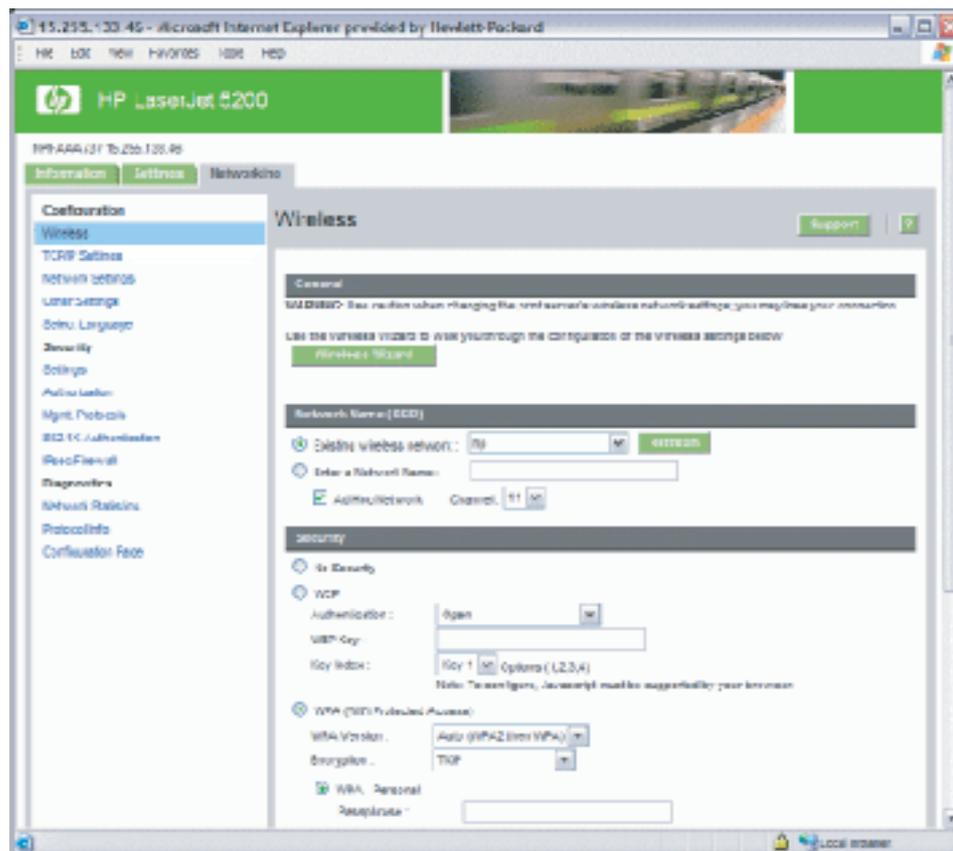

For network parameter descriptions, see "[Networking tab on page 68](#)".

Requirements

Compatible Web browsers

To access the HP Embedded Web Server, you must use a compatible Web browser. In general, you can use those Web browsers that support HTML 4.01 and cascading style sheets.

Hewlett-Packard recommends using one of the following browsers:

- Microsoft Internet Explorer 6.x or greater
- Firefox 2.x or greater
- Opera 9.0 or greater

Supported HP Web Jetadmin version

HP Web Jetadmin is a browser-based, enterprise management tool for network devices. HP Web Jetadmin is available at:

www.hp.com/go/webjetadmin

To use the improved security features, HP Web Jetadmin version 8.0 or greater is recommended for operation with the HP Embedded Web Server. Using HP Web Jetadmin, you can enable the IPv4/IPv6 SNMP v3 agent and create an SNMP v3 account on the print server.

 **NOTE:** HP Web Jetadmin 8.0 does not support SNMP configuration over IPv6 protocols. However, you can view HP Jetdirect MIB configuration objects (such as IPv6 and IPsec objects) over IPv4.

Currently, browser support between HP Web Jetadmin and the HP Embedded Web Server might differ. For supported browsers with HP Web Jetadmin, visit www.hp.com/go/webjetadmin.

View the HP Embedded Web Server

 **NOTE:** This section assumes that a wireless network connection is established.

If a wireless network connection is not established, you can use the HP Embedded Web Server to configure the HP Jetdirect wireless print server with wireless settings for your network.

Before you can use the HP Embedded Web Server, configure the HP Jetdirect print server with an IP address.

Using IPv6 protocols, addresses are typically configured automatically on the print server, although manual configuration is available. For basic information on IPv6 addresses, see [TCP/IP configuration on page 14](#).

Using IPv4 protocols, you can automatically configure IP parameters over the network, using BOOTP or DHCP each time the print server is turned on. Or, you can manually configure IP parameters using the printer's control panel (for selected printers), Telnet, the arp and ping commands, HP Web Jetadmin or other management software. For more information on TCP/IP configuration options, see [TCP/IP configuration on page 14](#).

When turned on, an HP Jetdirect print server that cannot retrieve a valid IP address from the network automatically assigns itself either the default IPv4 address 192.0.0.192 or a link-local address in the range 169.254.1.0 to 169.254.254.255. You can determine the IP address configured on your print

server by inspecting the HP Jetdirect configuration page. See [TCP/IP configuration on page 14](#) for more information.

If the default IPv4 address 192.0.0.192 is assigned, you must temporarily set up your computer with the same IP network number or establish a route to the print server before you can use the HP Embedded Web Server.


To access the HP Embedded Web Server, perform the following steps:

1. Run a supported Web browser.
2. Enter the IP address or FQDN of the print server as the URL.

 **NOTE:** For browsers that support direct IPv6 address entries, an IPv6 address is typically enclosed in brackets ([]). See your system documentation.

If you do not know the FQDN for the device (for example, *printer1.support.hp.com*), enter the host name (in this example, *printer1*). Your system might resolve an IP address for the device.

Figure 4-2 Entering an IP Address or Fully Qualified Domain Name

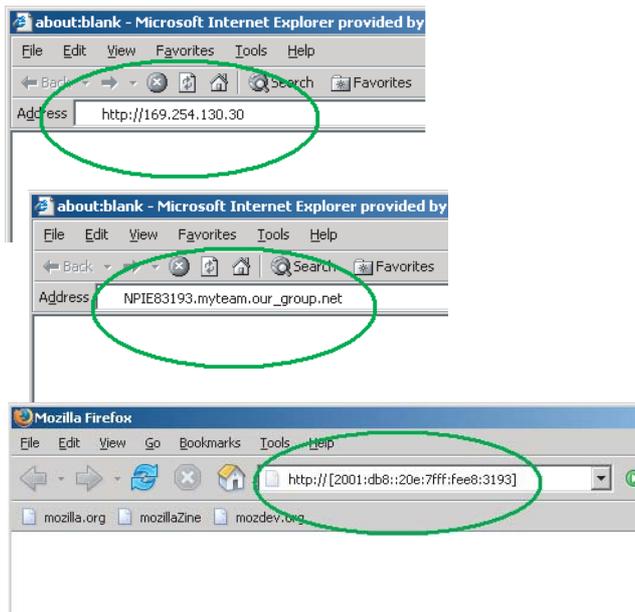

3. If prompted with security alerts, click **Yes** to proceed.

By factory default, HP Jetdirect print servers and printers/MFPs with IPsec support are configured as a secure site, using an X.509v3-compliant certificate installed on the print server for identification. Encrypted browser communications through HTTPS is required for initial access.

Although not recommended, you can use your **Internet Options** menu to configure your browser to ignore security warnings if the print server is configured to operate through HTTPS. See [Mgmt. Protocols on page 99](#).

4. An HP Embedded Web Server page is displayed. The printer/MFP typically provides the initial page that is displayed.

Operating notes

- If you enter or change a configuration parameter value, click **Apply** to enable your change, or click **Cancel** to erase your change.
- The HP Embedded Web Server provides access to wireless network connection parameters on HP Jetdirect wireless print servers.

△ **CAUTION:** If you change the wireless network settings, you can lose your connection. To reconnect, you might need to adjust your system to the new settings.

If the print server loses its network connection, you might need to reset it to a factory-default state and reinstall it.
- Changes to the IP address close the connection to the HP Embedded Web Server. To re-establish a connection, use the new IP address.

△ **CAUTION:** Changes to the IP address on the HP Jetdirect print server can cause printing failures on any clients configured with the previous IP address to print to this printer.
- For Novell NetWare networks, use the **IPX/SPX** tab on the **Network Settings** page to configure NDS queue server mode parameters. Note that the HP Embedded Web Server cannot create NDS objects (print server, printer, and print queue) on the Novell server. Instead, use a Novell NetWare utility, such as NWAdmin, or configure the IPX/SPX stack for NDS using an HP utility, such as HP Web Jetadmin.

HP Jetdirect Home tab

The **Home** tab displays the HP Jetdirect home page if a Web server in the attached device cannot be accessed or does not exist. The HP Jetdirect home page displays a generic printer graphic to represent the attached device. The HP Jetdirect print server's product model, firmware version, and network addresses are displayed along with any device information. [Table 4-1 HP Jetdirect Home Page Items on page 67](#) provides a summary of the items displayed on the HP Jetdirect home page.

 **NOTE:** The information displayed depends on the HP Jetdirect print server and device. Value-featured print servers provide limited information.

Table 4-1 HP Jetdirect Home Page Items

Item	Description
Home tab	HP Jetdirect Home page. This tab is not displayed if Web pages provided by the attached device are accessible.
Networking tab	Access to network configuration, security, and diagnostic parameters. For more information, see Networking tab on page 68 .
Device Info	Device information, such as the product name, model name, and serial number of the printer or MFP device that is connected to the network through the HP Jetdirect print server. Can also display other retrieved information such as Page Count or Control Panel status. The information varies depending on the features of the attached device.
Select Language	Displayed if the HP Jetdirect Web pages support multiple languages. You can also select supported language by using language preference settings in your browser. To display supported non-English languages, enable cookies in your browser settings.

Table 4-1 HP Jetdirect Home Page Items (continued)

Item	Description
Host Name	IP host name assigned to the device and stored on the HP Jetdirect print server. The default host name is NPIxxxxxx, where xxxxxx are the last six digits of the LAN hardware (MAC) address. See TCP/IP on the Networking tab on page 68 .
System Up Time	Length of time since either the HP Jetdirect print server or the network device was last turned off and then on.
System Contact	A text string (stored on the HP Jetdirect print server) for the name of a person to contact for this device. See TCP/IP on the Networking tab on page 68 .
System Location	Text string stored on the HP Jetdirect print server that identifies the physical location of this device. See the Networking TCP/IP configuration pages.
HP Jetdirect product	Product number of the HP Jetdirect print server (for example HP J7982E).
Firmware Version	Operating instruction version installed on the HP Jetdirect print server.
IP Address	IP address configured on the HP Jetdirect print server.
Hardware Address	LAN hardware (or MAC) address of the HP Jetdirect print server. This unique address is assigned by Hewlett-Packard, but can be locally administered.
LAA	LAA that replaces the LAN hardware (MAC) address. The LAA is configured under local control by a network administrator. By default, the LAA is the factory-assigned LAN hardware address.
Admin Password	<p>Indicates whether an administrator password is set. Can be configured through a Telnet session with the HP Jetdirect print server, or from HP Web Jetadmin.</p> <p>Because passwords are synchronized with selected printers, the password might have been set through printer security Web pages.</p> <p>Use the Admin Password page to set or clear administrator passwords.</p> <p>If an administrator password is set, you are prompted for a User Name and Password to access network parameters. For more information, click Help, or see Admin. Account on page 94.</p>

Device tabs

Instead of the Home tab, various device tabs are displayed if the attached network device also contains a supported HP Embedded Web Server. Device tabs provide access to the HP Embedded Web Server pages provided by the device. For information on Device tab features, see the HP Embedded Web Server guide for the device. This guide is supplied with HP LaserJet printers and MFPs that support an HP Embedded Web Server.

Networking tab

The **Networking** tab provides access to HP Jetdirect network configuration parameters and status. At the top of the page, the printer/MFP model, host name, and IP address are displayed. These items are persistent on all network configuration pages. The menu items in the left margin provide access to configuration and status pages.

 **NOTE:** The information displayed depends on the HP Jetdirect print server and device. Value-featured print servers provide limited information and capabilities.

Table 4-2 Networking Menu Items

CONFIGURATION section
<ul style="list-style-type: none">• Wireless on page 69• TCP/IP Settings on page 74• Network Settings on page 81• Other Settings on page 85• Select Language on page 91
SECURITY section
<ul style="list-style-type: none">• Security: Settings on page 91• Authorization on page 94• Mgmt. Protocols on page 99• 802.1X Authentication on page 101• IPsec/Firewall on page 103
DIAGNOSTICS section
<ul style="list-style-type: none">• Network Statistics on page 104• Protocol Info on page 104• Configuration Page on page 104

Wireless

 **NOTE:** You can use HP Jetdirect wired/wireless print servers in a wired or wireless networking environment. To specify the connection type, see **Misc. Settings on page 85**.

Use the Wireless pages to create or change your wireless network configuration parameters for your IEEE 802.11 wireless Ethernet connection.

The configuration parameters are summarized in [Table 4-3 Wireless configuration parameters on page 70](#).

The **Wireless** page displays all wireless configuration parameters required to make a wireless connection to your network. Click **Apply** to set, or **Cancel** to ignore, your configuration entries. To reset to factory-default values, click **Restore Defaults**.

Alternatively, you can click the **Wireless Wizard** button in the General section of the **Wireless** page to configure your wireless network connection. This launches a configuration wizard that guides you through the required 802.11 wireless configuration parameters and, depending on your choices, bypasses unnecessary parameters.

 **NOTE:** If you improperly exit the wizard, for example by failing to use the Cancel button, an **Operation Failed** screen might appear. If so, wait approximately two minutes before restarting the wizard.

An HP Jetdirect wireless print server with factory-default settings (ad hoc mode) is easily accessible by unauthorized clients. Therefore, do not turn on a print server with factory default settings any longer than necessary. Ensure that you verify any configuration settings.

Table 4-3 Wireless configuration parameters

Item	Description
Wireless Radio	When the print server is set to wired mode, you can disable the wireless radio.
Network Name (SSID)	<p>Select a network name that the HP Jetdirect print server connects to from the Existing wireless network list, or, provide a network name in the Enter a Network Name field. The network name is also called the service set identifier (SSID) and identifies the extended service set (ESS) that is normally associated with larger infrastructure mode networks. The print server lists the detected SSIDs.</p> <p>An empty (or blank) SSID field is accepted, for example, on networks that rely on signal strength, encryption and authentication methods to control network access.</p> <p>The factory-default SSID configured on the HP Jetdirect print server is "hpsetup". To initially communicate with the print server, your wireless computer's SSID must also be "hpsetup".</p> <p>NOTE: The SSID characters are case sensitive. Ensure you use the appropriate lowercase or uppercase characters.</p>
Refresh	Click this button to refresh the list of network names detected by the print server.
Ad Hoc Network (peer-to-peer)	<p>Wireless communication topology in which the wireless devices on a network communicate directly with each other. Access points are not used. Other terms used for ad hoc include independent basic service set (IBSS), and computer-to-computer mode.</p> <p>The factory-default mode configured on the HP Jetdirect print server is ad hoc. To initially communicate with the print server, your wireless computer must be set up for ad hoc.</p>
Channel	<p>(Ad hoc mode only) Identifies the radio frequency that the print server uses to broadcast its availability if it fails to associate with the specified ad hoc network on any channel.</p> <p>By factory default, channel 11 (2462 MHz) is used. However, channel 10 (2457 MHz) is also available.</p> <p>The factory-default mode configured on the HP Jetdirect print server is ad hoc. To initially communicate with the print server, your wireless computer must be set up for ad hoc.</p>
No Security	(No encryption or authentication. Open system.) Your wireless network does not require device authentication or security to access the network. However, your network might still use WEP encryption keys for data privacy.

Table 4-3 Wireless configuration parameters (continued)

Item	Description
WEP – Personal	<p>(Requires a WEP key.) Each device on your wireless network uses a shared encryption key (a shared password value) for network access and communications. Each device on the network must use the same key. The HP Jetdirect print server supports IEEE 802.11 wired equivalent privacy (WEP) keys for encrypted network communications. If you select WEP encryption, you must configure one or more WEP keys. Provide the following if you select WEP:</p> <ul style="list-style-type: none"><li data-bbox="624 468 1449 604">● Authentication — Select Open System authentication if your wireless network does not require authentication for network access. (Your network might use WEP encryption keys for data security.) Select Shared Key authentication if your network requires that each device be configured with the same WEP key for network access. Choose Auto to automatically select open or shared.<li data-bbox="624 632 1433 684">● WEP Key — The WEP key format is programmatically determined and validated using either alphanumeric ASCII (8-bit) characters or hexadecimal (4-bit) digits.<li data-bbox="624 711 1449 758">● Key Index — Specify the WEP key index position (1, 2, 3, 4) that the print server uses for encrypted communications.

Table 4-3 Wireless configuration parameters (continued)

Item	Description
WEP — Enterprise	<p>Select WEP — Enterprise security if your network uses WEP with EAP/802.1x authentication. This type of security utilizes a central authentication server, such as RADIUS, to authenticate users on the network. For WEP — Enterprise, the HP Jetdirect print server supports these server-based authentication protocols: LEAP PEAP EAP-TLS. Provide the following if you select WEP — Enterprise:</p> <ul style="list-style-type: none">• Enabled Protocols: Select LEAP, PEAP, or EAP-TLS. LEAP (Lightweight Extensible Authentication Protocol) is a proprietary protocol from Cisco Systems that uses passwords for mutual authentication (the client and the server authenticate each other). PEAP (Protected Extensible Authentication Protocol) is a mutual authentication protocol that uses digital certificates for server authentication and passwords for client authentication. For additional security, the authentication exchanges are encapsulated within TLS (Transport Level Security). EAP-TLS (EAP using Transport Level Security) is a mutual authentication protocol based on digital certificates.• User Name: Enter an EAP/802.1X user name, which cannot exceed 128 characters, for this device. The default user name is the default host name of the print server, NPIxxxxxx, where xxxxxx are the last six digits of the LAN hardware (MAC) address.• Password and Confirm Password: Enter an EAP/802.1X user password (up to 128 characters) for this device and then confirm the password by entering it again.• Server ID: Specify the Server ID validation string identifying and validating the authentication server. This string is specified on the digital certificate issued by a trusted Certificate Authority (CA) for the authentication server. The entry can be a partial string unless you select Require Exact Match.• Encryption Strength: Specify the minimum encryption strength to use during communications with the authentication server. You can select Low, Medium, or High encryption strength. For each encryption strength, ciphers are specified to identify the weakest cipher allowed.• Jetdirect Certificate: A self-signed HP Jetdirect certificate is preinstalled and used to validate the identity of the HP Jetdirect device to clients and to network authentication servers. This allows the HP Embedded Web Server to use HTTPS and appear as a secure site when accessed by a Web browser. Click Configure to update the certificate or install a new one.• CA Certificate: To validate the authentication server's identity, a CA (or Root) certificate must be installed on the print server. This CA certificate must be issued by the Certificate Authority who signed the authentication server's certificate. Click Configure to configure or install a CA certificate.
WPA (WiFi Protected Access)	<p>Your network uses WPA. Choose WPA – Personal, which uses a pre-shared key typically generated by a passphrase. Or, select WPA – Enterprise which is commonly used in enterprise-level networks. A dedicated server verifies the identity of a user or device requesting access to the network before granting that access.</p> <p>Select the WPA Version (Auto, WPA, or WPA-2), and then select the Encryption, using Auto, advanced encryption standard (AES), or temporal key integrity protocol (TKIP).</p>

Table 4-3 Wireless configuration parameters (continued)

Item	Description
WPA — Personal	<p>Choose WPA– Personal, which uses a pre-shared key typically generated by a passphrase.</p> <p>Enter the Passphrase to use when generating the pre-shared key for WPA — Personal authentication on your network. A passphrase must be from 8 to 63 ASCII characters in the hexadecimal range 21 through 7E (characters 0–9, a–z, A–Z and numerous special characters including !, @, #, \$, %, ^, &, (,), _ +, =, -, {, }, [,], \, /, ", <, >, ?, ", ', ~).</p>
WPA — Enterprise	<p>Select WPA — Enterprise security if your network uses WPA with EAP/802.1x authentication. This type of security utilizes a central authentication server, such as RADIUS, to authenticate users on the network. For WPA — Enterprise, the HP Jetdirect print server supports these server-based authentication protocols: LEAP PEAP EAP-TLS. Provide the following if you select WPA — Enterprise:</p> <ul style="list-style-type: none">• Enabled Protocols: Select LEAP, PEAP, or EAP-TLS. LEAP (Lightweight Extensible Authentication Protocol) is a proprietary protocol from Cisco Systems that uses passwords for mutual authentication (the client and the server authenticate each other). PEAP (Protected Extensible Authentication Protocol) is a mutual authentication protocol that uses digital certificates for server authentication and passwords for client authentication. For additional security, the authentication exchanges are encapsulated within TLS (Transport Level Security). EAP-TLS (EAP using Transport Level Security) is a mutual authentication protocol based on digital certificates.• User Name: Enter an EAP/802.1X user name, which cannot exceed 128 characters, for this device. The default user name is the default host name of the print server, NPIxxxxxx, where xxxxxx are the last six digits of the LAN hardware (MAC) address.• Password and Confirm Password: Enter an EAP/802.1X user password (up to 128 characters) for this device and then confirm the password by entering it again.• Server ID: Specify the Server ID validation string identifying and validating the authentication server. This string is specified on the digital certificate issued by a trusted Certificate Authority (CA) for the authentication server. The entry can be a partial string unless you select Require Exact Match.• Encryption Strength: Specify the minimum encryption strength to use during communications with the authentication server. You can select Low, Medium, or High encryption strength. For each encryption strength, ciphers are specified to identify the weakest cipher allowed.• Jetdirect Certificate: A self-signed HP Jetdirect certificate is preinstalled and used to validate the identity of the HP Jetdirect device to clients and to network authentication servers. This allows the HP Embedded Web Server to use HTTPS and appear as a secure site when accessed by a Web browser. Click Configure to update the certificate or install a new one.• CA Certificate: To validate the authentication server's identity, a CA (or Root) certificate must be installed on the print server. This CA certificate must be issued by the Certificate Authority who signed the authentication server's certificate. Click Configure to configure or install a CA certificate.
Restore Defaults	<p>Click this button to restore 802.1X configuration settings to factory default values.</p>

TCP/IP Settings

The **TCP/IP Settings** menu provides access to the following tabs:

- [Summary tab on page 74](#)
- [Network Identification tab on page 75](#)
- [TCP/IP\(v4\) tab on page 76](#)
- [TCP/IP\(v6\) tab on page 77](#)
- [Config Precedence tab on page 78](#)
- [Advanced tab on page 79](#)

Summary tab

This tab provides a summary of the TCP/IP configuration. Items on this page are described in the following table.

Table 4-4 TCP/IP Summary tab

Item	Description
Host Name	IP host name assigned to the device and stored on the HP Jetdirect print server. To configure a host name, see the Network Identification tab.
IPv4 Status	Status of the IPv4 protocol. You cannot disable IPv4 from the HP Embedded Web Server in this release.
Fully Qualified Domain Name (IPv4/IPv6)	Consists of the device's host name and domain name. Unless the network administrator segments domains into separate IPv4 and IPv6 hosts, you can use the FQDN on either IPv4 or IPv6 networks simultaneously.
IPv4 Address	IPv4 address, subnet mask and default gateway for the print server.
Config By	IPv4 parameters configured using: DHCP, BOOTP, Manual, or Auto IP.
DHCP Lease Time	Duration of the DHCP IP address lease (in seconds) for the print server. Populated if DHCP configuration is used.
IPv6 Status	Status of the IPv6 protocol. Enable or disable using the HP Embedded Web Server.
Fully Qualified Domain Name (IPv6 only)	Consists of the device's host name and domain name. Depending on the network architecture, it can be the same as, or different from, the printer's IPv4 FQDN. If assigned, it applies to the IPv6 network only.

Table 4-4 TCP/IP Summary tab (continued)

Item	Description
IPv6 Address list	<p>IPv6 addresses configured on the print server. For each address, the following items are specified:</p> <ul style="list-style-type: none">• Prefix length: Number of bits that comprise the fixed portion of the address. Typically, it is 64 and identifies network/subnet portion of the address.• Config By: How the address was configured, such as auto-configuration through link-local addressing, by a router, by a DHCP(v6) server, or configured manually.• Valid Lifetime: Length of time (lifetime) that the address can be used, after which the address becomes invalid. Determined during the auto-configuration process.• Preferred Lifetime: Length of time (lifetime) that the address can be used without limitation. After this time, the address is deprecated (its use is discouraged). The preferred lifetime is a subset of the valid lifetime, and is determined during the auto-configuration process.
Default Route Information	<p>IPv6 address and the length of time until it expires. (Used when a router advertises itself to the print server as a default router on the local link.)</p>

Network Identification tab

This tab provides TCP/IP network identification. Items on this page are described in the following table.



NOTE: Names, such as host and domain, must begin with a letter and can contain only letters, numbers, periods (for domain names only), or hyphens. The underline character () is not allowed.

Table 4-5 TCP/IP Network Identification tab

Item	Description
Host Name	<p>Readable IP name (the SNMP SysName object) for the network device. Must start with a letter and can end in a letter or number, and be up to 32 ASCII characters in length. The default name is NPIxxxxxx, where xxxxxx are the last six digits of the LAN hardware (MAC) address.</p>
Domain Name (IPv4/IPv6) Domain Name (IPv6 only)	<p>DNS domain name that the HP Jetdirect print server resides in (for example, support.hp.com). This name is not the host name or the FQDN (such as printer1.support.hp.com).</p> <p>The IPv4 and IPv6 domain names can be the same or different depending on the network. A separate IPv6 domain name can be assigned on networks where segmentation of IPv4 and IPv6 hosts is desirable. If you assign an IPv6 domain name, it applies to the IPv6 network only.</p>
DNS (IPv4)	<p>Primary and secondary DNS servers on your IPv4 or IPv6 networks.</p>
DNS (IPv6)	<p>Primary: IP address of the primary DNS server.</p> <p>Secondary: IP address of a secondary DNS server to use if the primary DNS server is unavailable.</p>

Table 4-5 TCP/IP Network Identification tab (continued)

Item	Description
DNS Suffixes (IPv4/IPv6)	<p>Printer domain names. You can create and store a DNS suffix list on the print server to assist in resolving the printer's host name with its IP address. (FQDN consists of a domain name appended to a host name. FQDNs are used, for example, by DNS servers to resolve an IP address associated with a device.) The DNS suffix list can contain up to 32 entries. DNS suffix entries can contain up to 256 alphanumeric characters and periods.</p> <p>To add an entry to the suffix list, enter a domain name (text string) in the field next to the Add button, and then click Add. To delete an entry from the list, select it, and then click Delete.</p>
WINS (IPv4 only)	<p>Preferred and alternate WINS server on your IPv4 network. Like DNS, WINS provides IP address and name resolution services for network computers and devices.</p> <p>Preferred (Primary): IP address of the preferred WINS server.</p> <p>Alternate (Secondary): IP address to use if the preferred WINS Server is unavailable.</p>
Bonjour	<p>Bonjour service name (previously listed as Multicast Domain Name System [mDNS Service Name]), or the assigned Bonjour domain name.</p> <ul style="list-style-type: none">• Bonjour Service Name: Used to resolve a particular device or service if socket information (such as the IP address) changes from session to session. The name is persistent. <p>The default service name is the printer model and the last six digits of the LAN hardware (MAC) address. Enter up to 64 alphanumeric characters.</p> <ul style="list-style-type: none">• Bonjour Domain Name: (Read-only parameter.) Bonjour domain name assigned to the device, in the form <host name>.local. If a host name is not assigned, the default host name NPIxxxxxx is used, where xxxxxx are the last 6 digits of the LAN hardware (MAC) address.

TCP/IP(v4) tab

Use the **TCP/IP(v4)** tab to configure basic IPv4 settings on the print server. For additional parameters, see the **Advanced** tab.

Table 4-6 TCP/IP(v4) tab

Item	Description
IP Configuration Method	<p>Method that the HP Jetdirect print server uses for its IP configuration parameters: BOOTP (default), DHCP, Manual, or Auto IP.</p> <p>BOOTP or DHCP IP parameters are automatically configured by a BOOTP or DHCP server each time the print server is turned on.</p> <p>Manual Enter IP parameters using this Web page or using other available tools.</p> <p>Auto IP A unique link-local address 169.254.x.x is assigned.</p> <p>For more information, see TCP/IP configuration on page 14.</p>

Table 4-6 TCP/IP(v4) tab (continued)

Item	Description
IP Address	Manually assign the IP address on the HP Jetdirect print server. This IP address uniquely identifies a node on a TCP/IP network. Duplicate IP addresses on a TCP/IP network are not allowed.
Subnet Mask	Manually assign a subnet mask if subnetting is used. A subnet mask is a 32-bit number. When applied to an IP address, the subnet mask determines which bits specify the network and subnet, and which bits uniquely specify the node.
Default Gateway	IP address of a router or computer that is used to connect to other networks or subnetworks.

TCP/IP(v6) tab

Use the **TCP/IP(v6)** tab to enable IPv6 operation, view IPv6 auto-configuration addresses, or manually configure IPv6 addresses. For basic information on IPv6 addresses on the print server, see [TCP/IP configuration on page 14](#). For additional parameters that you can configure, see the **Advanced** tab.

Table 4-7 TCP/IP(v6) tab

Item	Description
IPv6 Enable	Select or clear the check box to enable or disable IPv6 operation.
Link-Local Address	(Read only parameter.) Print server's IPv6 link-local address and prefix length. The print server configures this address automatically. The link-local address allows the print server to communicate with other IPv6 hosts on the local link without routers.
Stateless Addresses	Select or clear the check box to enable or disable the use of stateless addresses. NOTE: Changes to the stateless addresses normally takes place when the print server is turned off then turned on. You can immediately implement any stateless address changes by clearing and then selecting the IPv6 Enable check box. (Read only parameters.) The stateless addresses and prefix lengths configured on the print server are listed. Stateless addresses are assigned under the control of a router.

Table 4-7 TCP/IP(v6) tab (continued)

Item	Description
DHCPv6 Addresses	<p>Select the DHCPv6 policy that the print server uses for stateful addresses, assigned by a DHCPv6 server.</p> <p>Select one of the following:</p> <ul style="list-style-type: none">• Perform DHCPv6 only when requested by a router Allow the router to control stateful addressing.• Perform DHCPv6 when stateless configuration is unsuccessful or disabled Attempt to use DHCPv6 if stateless addressing by a router fails.• Always perform DHCPv6 on startup Always attempt DHCPv6 for configuration each time it is turned on. <p>If DHCPv6 is used for stateful addressing, the addresses (and associated prefixes) configured on the print server are listed.</p>
Manual Address	<p>Set an IPv6 address on the print server and select whether to use it.</p> <p>Select the Enable check box to use a manually configured IPv6. Clear this check box to disable the address.</p> <p>Enter the IPv6 address and its prefix length using the Address and Prefix length fields. If IPv6 address prefixes (for example, supplied by a router) are stored on the print server, you can select a prefix from the Prefix field, and then click Add to copy the prefix into the Address field. Then enter the remainder of the address.</p>

Config Precedence tab

Specify the order of precedence of the print server configuration methods. For example, to ensure that IPv4 parameters configured by a TFTP server cannot be overwritten by a manual configuration method (such as the printer control panel, Telnet, or the HP Embedded Web Server), you can indicate that TFTP takes precedence over manual configuration.

The factory-default precedence order is indicated in the following table.

Table 4-8 TCP/IP Config Precedence tab

Item	Description
Configuration Methods	<p>Precedence of the configuration methods. The default precedence order is shown, where manual configuration has the highest priority. To change the order of the list, select an entry and use the up or down arrows to move it.</p> <p>Manual Use the printer control panel, Telnet, HP Embedded Web Server, installation and management software.</p> <p>TFTP Use a TFTP file from a TFTP server, typically identified during a BootP/DHCP configuration.</p> <p>DHCP/Bootp Use a BootP or DHCPv4 server.</p> <p>DHCPv6 Use a DHCPv6 server.</p> <p>Default: Factory default configuration.</p>
Reset to default scheme	Reset the precedence table to the default sequence.

Table 4-8 TCP/IP Config Precedence tab (continued)

Item	Description
Reinitialize Now	Save the new precedence table, clear the configuration method to its factory-default setting, and restart the IP stack.
Clear Previous Values and Reinitialize Now	Save the new precedence table, clear the configuration method to its factory-default setting, clear current TCP/IP parameter settings, and restart the IP stack.
Apply Cancel	Click Apply to save the changes to the Configuration Methods precedence table. Depending on the changes made, you might need to turn the print server Off/On to implement. Click Cancel to cancel your changes to the precedence table. CAUTION: Clicking Cancel does not reverse changes made by the Reinitialize Now or Clear Previous Values and Reinitialize Now buttons.

Example: To set all parameters configured through DHCP to Read-only, and allow manual configuration only of parameters that are not configured through DHCP, use the following steps:

1. Turn on the print server so that it obtains its DHCP configuration.
2. Change the precedence table to the following:

BOOTP/DHCPv4
DHCPv6
TFTP
Manual
Default

3. Press **Clear Previous Values and Reinitialize Now**.

Advanced tab

Use this tab to configure additional TCP/IP parameters.

Table 4-9 TCP/IP Advanced tab

Item	Description
Idle Timeout	(IPv4 or IPv6) Number of seconds that an idle connection is allowed to remain open. The default is 270 seconds. Enter up to 3600 seconds. If set to 0, the timeout is disabled and TCP/IP connections remain open until closed by the device at the other end of the network, such as a workstation. (TCP/IP connections related to the print protocol are closed. Telnet or FTP connections remain open.)
LPD Banner Page	(IPv4 or IPv6) Print an LPD banner page for print jobs. For currently supported print servers, only Port 1 is available.
System Contact	(IPv4 or IPv6) Person who administers or services this device. If set, displayed on the Protocol Info page, and the HP Jetdirect Home tab, if available.

Table 4-9 TCP/IP Advanced tab (continued)

Item	Description
System Location	(IPv4 or IPv6) Physical location of the device or related information. Enter up to 64 alphanumeric characters. If set, displayed on the Protocol Info page, and the HP Jetdirect Home tab, if available.
Automatic	(IPv4 only) Web proxy discovery is automatically initiated (default).
Manual cURL	(IPv4 only) Web proxy server is automatically selected using a configuration script that is based on the user location. Specify the script by entering the URL in this field.
Manual Settings	(IPv4 only) Web proxy defaults are set manually using the following methods:
Proxy Server	(For printers/MFPs that support this feature) (IPv4 only) Proxy server to use by embedded applications in your printer/MFP. Enter up to 64 alphanumeric characters. A proxy server is typically used by network clients for Internet access. It caches Web pages and provides a degree of Internet security for those clients. Enter its IP address or FQDN. On some networks, you might need to contact your ISP for the proxy server address.
Proxy Server Port	(For printers/MFPs that support this feature) (IPv4 only) Port number used by the proxy server for client support. Enter a value from 0 to 65535. The port number identifies the port reserved for proxy activity on your network.
Proxy Server User Name	(For printers/MFPs that support this feature) (IPv4 only) If a user account is set on the proxy server, enter the user name.
Proxy Server Password	(For printers/MFPs that support this feature) (IPv4 only) If a user account is set on the proxy server, enter the user password.
Proxy Server Exception List	(For printers/MFPs that support this feature) (IPv4 only) Web addresses, host names, or domain names not requiring access through the proxy server. Use a semicolon (;) to separate entries.
Disable	Do not automatically search for the web proxy.
Default IP	(IPv4 only) IP address to use when the print server cannot obtain an IP address from the network during a forced TCP/IP re-configuration. This situation can occur if the print server is configured to use BOOTP/DHCP. LEGACY_DEFAULT_IP Set the legacy default IP address 192.0.0.192. AUTO_IP Sets a link-local IP address 169.254.x.x. The initial setting is determined by the IP address obtained when first turned on.
Send DHCP requests if IP address is Auto IP (169.254.x.x) or Legacy Default IP	(IPv4 only) Periodically transmit DHCP requests when a legacy default IP address 192.0.0.192 or link-local IP address 169.254.x.x is automatically assigned. Select or clear the check box to enable (default) or disable DHCP requests.

Table 4-9 TCP/IP Advanced tab (continued)

Item	Description
Use Stateless DHCPv4 When Manually Configured	(IPv4 only) Allow additional IPv4 parameters to be automatically configured from a DHCPv4 server even when the print server is statically configured, such as a manually configured IP address, subnet mask or default gateway. Select or clear the check box to enable (default) or disable stateless DHCPv4 configuration.
Enable DHCPv4 FQDN compliance with RFC 4702	By default, HP Jetdirect uses the Host Name and Domain Name settings to derive the FQDN. Selecting this option forces HP Jetdirect to ignore the Host Name and Domain Name settings and instead use the host name and domain name returned by FQDN.
Hop Limit/WSD	Set the WSD-Discovery hop limit for the site local IPv6 multicast packet.
TTL/SLP	(IPv4 only) IP multicast time-to-live (TTL) discovery setting for SLP packets. Enter from 1 to 15. The default value is 4 hops (the number of routers from the local network). Set to -1 to disable multicast capability. For print servers configured for Auto IP (link-local) addresses, this setting is ignored. TTL on outbound packets is always set to 255 and limited to the link-local network.
Syslog Server	(IPv4 only) IP address of a host computer that is configured to receive syslog messages from the HP Jetdirect print server. If a syslog server is not specified, syslog messages are disabled.
Syslog Protocol	(IPv4 only) Select whether to transport syslog messages to the syslog server using the TCP or UDP protocol.
Syslog Port	(IPv4 only) Valid port number to use for transporting syslog messages to the syslog server using the TCP or UDP protocol.
Syslog Maximum Messages	(IPv4 only) Maximum number of syslog messages sent by the HP Jetdirect print server per minute. Allows you to control the log file size. The default is 10 per minute. If set to zero, no maximum number is defined.
Syslog Priority	(IPv4 only) Filter syslog messages sent to the syslog server. Enter from 0 to 7, with 0 being the most specific and 7 being the most general. Only messages that are lower than the specified filter level (that is, higher in priority) are reported. The default value 7 reports all syslog messages. A value of 8 disables syslog reporting.

Network Settings

Use the **Network Settings** pages to set or change configuration parameters for **IPX/SPX** on page 81, **AppleTalk** on page 83, **DLC/LLC** on page 83, and **SNMP** on page 83 protocols. To assign a parameter setting, enter the desired value and click **Apply**.

 **NOTE:** The features displayed depend on the print server. Value-featured print servers provide limited protocol support.

IPX/SPX

Use the **IPX/SPX** tab to configure IPX/SPX parameters on the HP Jetdirect print server. IPX/SPX protocols are used for operation on a Novell NetWare or compatible IPX/SPX network (such as a Microsoft network). For a description of the items, see [Table 4-10 IPX/SPX tab settings on page 82](#).

△ **CAUTION:** If you are using direct-mode printing over IPX/SPX on a Microsoft network, **do not** disable IPX/SPX.

For a Novell NetWare network:

- Use the HP Embedded Web Server to select Queue Server Mode parameters in a Novell Directory Services (NDS) environment.
- Do not use the HP Embedded Web Server to create the NDS print server, printer, and queue objects. Instead, use another tool or utility.

Table 4-10 IPX/SPX tab settings

Item	Description
IPX/SPX Enable	Select the check box to use IPX/SPX protocols.
IPX/SPX Frame Type	<p>IPX/SPX frame type to use on your network. After a frame type is configured, all others are counted and discarded.</p> <ul style="list-style-type: none">● All Frame Types (Auto) Sense all types and configure the first one detected (default).● Ethernet 802.3 (EN_8023) Use IPX over IEEE 802.3 frames.● Ethernet II (EN_II) Use IPX over Ethernet frames.● Ethernet 802.2 (EN_8022) Use IPX over IEEE 802.2 with IEEE 802.3 frames.● Ethernet SNAP (EN_SNAP) Use IPX over SNAP with IEEE 802.3 frames.
SAP Interval	Time interval (in seconds) that the HP Jetdirect print server waits to send SAP messages, which are broadcast to advertise its service capabilities on a Novell NetWare network. The default is 60 seconds. Enter zero (0) to disable.
Print Server Name	NetWare printer name for the HP Jetdirect print server. The default name is NPxxxxxx, where xxxxxx are the last six digits of the HP Jetdirect print server's LAN hardware (MAC) address.
NDS Tree Name	Name of the NDS tree for this device. Refers to the name of the organizational tree used by your network. To disable NDS support, leave the field blank.
NDS Context	<p>NDS container or organizational unit that contains the print server object. Print queue and device objects can be located anywhere within the NDS tree, but the HP Jetdirect print server must be configured with the fully qualified print server object name.</p> <p>For example, if the print server object is found in the container "marketing.mytown.lj", the fully qualified print server context name (CN) is:</p> <p>"OU=marketing.OU=mytown.O=lj"</p> <p>In the example, OU is an organization unit container and O is an organization container within the NDS tree. The print server also accepts "marketing.mytown.lj".</p> <p>To disable NDS support, leave the field blank.</p> <p>NOTE: You cannot create NDS objects using the HP Embedded Web Server.</p>

Table 4-10 IPX/SPX tab settings (continued)

Item	Description
Job Poll Interval	Time interval in seconds that the HP Jetdirect print server waits to check for print jobs in a print queue.
PJL Configuration	Set the printer job language (PJL) parameters. Select or clear the check box to enable or disable the following: <ul style="list-style-type: none">• Banner Page Print separator pages between print jobs.• End-Of-Job Notification Forward an end-of-job message to a client application (if received from the printer).• Toner Low Notification Forward a toner low message to a client application (if received from the printer).

AppleTalk

Use the **AppleTalk** tab to configure selected settings on the HP Jetdirect print server. For a description of the items, see [Table 4-11 AppleTalk tab settings on page 83](#).

 **NOTE:** The displayed AppleTalk parameters include the printer types that are advertised on the network.

The HP Jetdirect print server supports AppleTalk Phase 2 only.

Table 4-11 AppleTalk tab settings

Item	Description
AppleTalk Enable	Select the check box to enable the AppleTalk protocol. Current AppleTalk parameters stored on the print server are displayed. NOTE: On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.
AppleTalk Name	Name of the printer on the AppleTalk network. If you enter a name that is already assigned on your network, a number is used to indicate the duplicate name.
Type	Printer type advertised on the network. Display up to two types (for example, HP LaserJet and LaserWriter).
Zone	AppleTalk network zone for the printer. By default, the current zone is displayed. Click the Refresh selected zone Info button to refresh the list of available zones.

DLC/LLC

Select or clear the check box to enable or disable DLC/LLC protocols on the HP Jetdirect print server.

 **NOTE:** On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.

SNMP

Use the SNMP tab to specify or change the provided parameters. For a description of the items, see [Table 4-12 SNMP tab settings on page 84](#).

△ **CAUTION:** Hewlett-Packard recommends using HP Web Jetadmin to configure SNMP v3 and other security settings on the print server.

If you use the HP Embedded Web Server, existing SNMP v3 accounts are removed. In addition, you must implement the SNMP v3 account information on the SNMP management application. For more information, see [SNMP v3 on page 99](#).

Table 4-12 SNMP tab settings

Item	Description
Enable SNMPv1/v2 read-write access	<p>Select the check box to enable the SNMP v1/v2c agents on the print server. Configure custom community names to control management access to the print server.</p> <p>Set Community Name is a password to send (or write) SNMP information on the HP Jetdirect print server.</p> <p>Get Community Name is a password to retrieve (or read) SNMP information on the HP Jetdirect print server.</p> <p>An incoming SNMP SetRequest or GetRequest command must contain the appropriate Set or Get community name for the print server to respond.</p> <p>Enter up to 255 alphanumeric characters for the community names.</p> <p>Select the check box to disable the default Get community name <code>public</code>.</p> <p>NOTE: If <code>public</code> is disabled, some port monitors or discovery utilities might not operate properly.</p>
Enable SNMPv1/v2 read-only access	<p>Enable the SNMP v1/v2c agents on the print server, but limit access to read-only. Write-access is disabled. The default Get community name <code>public</code> is automatically enabled.</p>
Disable SNMPv1/v2	<p>Disable the SNMP v1/v2c agents on the print server. This is recommended for secure environments.</p> <p>NOTE: If you disable SNMP v1/v2c, some port monitors or discovery utilities might not operate correctly.</p>
Enable SNMPv3	<p>(Full-featured HP Jetdirect print servers only) Enable the SNMP v3 agent on the print server.</p> <p>You must create an SNMP v3 account on the print server, and implement the account information on the SNMP v3 management application. To create the account, provide the following information:</p> <p>User Name SNMP v3 account user name.</p> <p>Authentication Key A 16 byte (MD5) hexadecimal value used to validate credentials.</p> <p>Privacy Key A 16 byte hexadecimal value used to encrypt the data portion of the packet using the data encryption standard (DES) algorithm.</p> <p>Context Name Context in which this user can access SNMP objects. This is always Jetdirect.</p>

Other Settings

Use this tab to provide access to a variety of management and printing configuration options. The following tabs are discussed:

- **Misc. Settings** on page 85 Enable miscellaneous advanced protocols and functions
- **Firmware Upgrade** on page 87 Update your HP Jetdirect print server with new features and enhancements
- **LPD Queues** on page 87 Set up print queues used in printing with line printer daemon (LPD) printing services
- **USB Settings** on page 90 (External print servers only.) Configure USB connection parameters
- **Support Info** on page 90 Set up the **Support** link located under **Other Links** in the left margin
- **Refresh Rate** on page 90 Set the time interval (in seconds) for HP Embedded Web Server diagnostic page updates

Misc. Settings

Use the **Misc. Settings** tab to set a variety of advanced protocols and features, as described in [Table 4-13 Miscellaneous Settings on page 85](#).

Table 4-13 Miscellaneous Settings

Item	Description
SLP Config	Enable SLP, which is used by certain client application software to automatically discover and identify the HP Jetdirect print server. If SLP uses multicast protocols, you must enable Multicast IPv4.
Telnet Config	Use Telnet to access to HP Jetdirect configuration parameters. For more information, see TCP/IP configuration on page 14 .
Bonjour	Use Bonjour services (formerly listed as Multicast Domain Name System [mDNS] services). Bonjour is typically used for IP address and name resolution (through UDP port 5353) where a conventional DNS server is not used. For Bonjour operation, you must enable Multicast IPv4.
Multicast IPv4	Use the receipt and transmission of IP version 4 multicast packets by the print server. NOTE: If disabled, other protocols that use multicast protocols, such as Bonjour and SLP, might also be disabled.
9100 Config	Use port 9100 services. This is an HP-proprietary raw TCP/IP port on the HP Jetdirect print server and is the default port for printing. It is accessed by HP software, such as the HP Standard Port.
FTP Printing	Use FTP services available on the HP Jetdirect print server for printing. For more information, see FTP printing on page 173 .
LPD Printing	Use LPD services on the HP Jetdirect print server. LPD provides line printer spooling services for TCP/IP systems. For more information, see LPD printing on page 163 .

Table 4-13 Miscellaneous Settings (continued)

Item	Description
IPP Printing	Use IPP on the HP Jetdirect print server. If the printer is properly connected and accessible, IPP allows printing to this device over the Internet (or intranet). A properly configured IPP client system is also required. For information on IPP client software, see HP software solutions summary on page 7 .
HP XML Services	Allow access by HP Web service applications to XML-based data on the HP Jetdirect print server.
Certificate Mgmt Service	Allow HP Web Jetadmin to access and service your certificate configuration.
Web Services Print	Use the Microsoft Web Services for Devices (WSD) Print services supported on the HP Jetdirect print server.
WS-Discovery	Use the Microsoft Web Services Dynamic Discovery (WS Discovery) protocols on the print server.
LLMNR	Indicates whether link local multicast name resolution (LLMNR) requests are responded to over IPv4 and IPv6.
Link settings	<p>(For wired 10/100/1000T Ethernet) Set the print server's link speed and communication mode. The available selections depend on the print server model.</p> <p>CAUTION: If you change the link setting, network communications with the print server and network device might be lost.</p> <ul style="list-style-type: none"> ● AUTO (default) Use auto-negotiation to configure itself with the highest link speed and communication mode allowed. If auto-negotiation fails, either 100TX HALF or 10TX HALF is set, depending on the detected link speed of the hub/switch port. (A 1000T half-duplex selection is not supported.) ● 10T-Full 10 Mbps, full-duplex operation. ● 10T-Half 10 Mbps, half-duplex operation. ● 100TX-Full 100 Mbps, full-duplex operation. ● 100TX-Half 100 Mbps, half-duplex operation. ● 100TX-AUTO Limit auto-negotiation to a maximum link speed of 100 Mbps. ● 1000T FULL 1000 Mbps, full-duplex operation.
Locally Administered Address	<p>(Supported print servers only) Warning: Changing the locally administered address results in the loss of connectivity to the browser.</p> <p>Specify a locally administered address (LAA) to replace the factory assigned LAN Hardware (MAC) address. If used, enter a string of exactly 12 hexadecimal digits.</p> <p>For Ethernet print servers, the LAA address must start with hexadecimal X2, X6, XA, or XE, where X is any hexadecimal digit 0 through F.</p> <p>The default address is the factory assigned address.</p>
Syslog Facility	Identify the source facility of a message. Typically used to identify the source of selected messages during troubleshooting. By default, the HP Jetdirect print server uses LPR as the source facility code. However, you can use values of local0 through local7 to isolate individual or groups of print servers.
HTTP Idle Timeout	<p>Length of time after which an idle HTTP connection is closed. Applies to the time after an HTTP request or response completes. Enter from 5 to 60 seconds. The default is 15.</p> <p>Set to zero (0) to disable. (The TCP/IP idle timeout value is used.)</p>

Table 4-13 Miscellaneous Settings (continued)

Item	Description
Dynamic Raw Port Setting	Specify additional ports for printing to TCP port 9100. Valid ports are 3000 to 9000, which are application-dependent.
Bonjour Highest Priority Service	Specify the highest Bonjour priority service to use for printing: 9100 Printing Raw IP printing through HP-proprietary port 9100. IPP Printing Internet Printing Protocol printing. LPD Printing (RAW) Default LPD raw queue printing. LPD Printing (TEXT) Default LPD text queue printing. LPD Printing (AUTO) Default LPD auto queue printing. LPD Printing (BINPS) Default LPD binary PostScript queue printing. LPD Printing (<user-defined>) List up to 5 LPD queues (if configured), where <user-defined> is the name of the user-specified LPD print queue. The default depends on the printer, typically 9100 Printing or LPD Printing (BINPS) .
Erase Data	Indicate whether to erase all configuration settings during a cold reset. If you select this check box, all settings stored on the printer/MFP (including stored certificates) are erased during a cold reset. CAUTION: Selecting this option erases all settings stored on the printer/MFP including stored certificates.

Firmware Upgrade

For print servers that support firmware upgrades, use this tab to upgrade the print server with new features.

The firmware upgrade file for the print server must be available on your system. To identify and retrieve the appropriate upgrade file, click HP Jetdirect Firmware Updates (Internet access required), or visit HP online support at:

www.hp.com/go/webjetadmin_firmware

From the HP online firmware upgrade page, use the following steps:

1. Locate the print server model (or product number) and the upgrade file.
2. Check the upgrade file version and verify that it is more recent than the print server's installed version. If it is, then download the file. If not, then you do not need to upgrade.

To upgrade the print server using the HP Embedded Web Server:

1. Enter the path to the upgrade file (Firmware File), or click **Browse** to locate it.
2. Click **Upgrade Firmware**.

LPD Queues

Use the **LPD Queues** page to specify LPD print queues on the HP Jetdirect print server. For more information on LPD printing and print queues, see [LPD printing on page 163](#).

You must enable LPD printing on the print server before you can set LPD queues. If LPD is disabled, go to the [Misc. Settings on page 85](#) tab and enable it.

If LPD printing is enabled, ten different named print queues are available. Four of these queues are configured automatically and their parameters cannot be changed. You can configure the remaining six queues.

 **NOTE:** Value-based print servers do not support user-defined LPD queues.

You can set up the six modifiable queues with character strings, such as job control commands, that are automatically added before or after the print job. You can define up to eight named strings, setting each queue so that the named string either precedes (**Prepend String Name**) or follows (**Append String Name**) the print data.

To set up a user-defined print queue, first define string names to prepend or append to the print job using the appropriate queue type. You specify print queue use by setting up an LPD printer that uses that queue. For example, if you set up a string "a" with a value of "abc" and string "z" with a value of "xyz", you can define print queue "az_queue" with a prepend string of "a", and append string of "z", and a queue type of RAW. When you send a print job consisting of <formatted_text> through queue az_queue, the job sent to the printer is "abc<formatted_text>xyz".

 **CAUTION:** Avoid using lowercase and uppercase characters to differentiate queue names. Management of LPD queues by other tools (such as Telnet) can yield unpredictable results.

LPD Queue Parameters for setting up LPD queues are described in [Table 4-14 LPD Queues tab settings on page 88](#).

Table 4-14 LPD Queues tab settings

Item	Description
Queue Name	Queue name. Enter up to 32 alphanumeric characters. Define up to six queues.
Prepend String Name	<p>Enter the prepend string name. (These precede the print data.) You define string names/values using the String Table at the bottom of the page.</p> <p>You can concatenate multiple string names using a plus (+) character. For example, to prepend two separate strings, enter the following:</p> <pre><stringname1>+<stringname2></pre> <p>In the example, stringname1 and stringname2 are specified as two separate string names with different values.</p>
Append String Name	<p>Enter the append string name. (These follow the print data.) You define string names/values by using the String Table at the bottom of the LPD Queues page.</p> <p>You can concatenate multiple string names using a plus (+) character. For example, to append two separate strings, enter the following:</p> <pre><stringname1>+<stringname2></pre> <p>In the example, stringname1 and stringname2 are specified as two separate string names with different values.</p>

Table 4-14 LPD Queues tab settings (continued)

Item	Description
Queue Type	<p>Processing instruction for the queue. Choose from these four queue types:</p> <ul style="list-style-type: none"> • RAW No processing. Treats the data in a raw queue as a print job that is already formatted in PCL, PostScript, or HP-GL/2, and sends it to the printer without modification. (Prepend or Append strings are added to the job in the appropriate position.) • TEXT Carriage return added. Treats data in text queues as unformatted or ASCII text, and adds a carriage return to each line before sending it to the printer. • AUTO (Automatic) Uses auto-sensing to determine whether the print data is sent as raw or text. • BINPS (Binary PostScript) Instructs the PostScript interpreter to interpret the print job as Binary PostScript data.
Default Queue Name	Queue name to use if the queue specified for a print job is unknown. By default, this is AUTO .
String Name	Name of a character string to use in the prepend/append queue table. Enter up to 32 alphanumeric characters. You can define up to eight character strings for use in LPD queues.
Value	<p>Define the value for the associated string name used in the prepend/append queue table. This value is sent to the printer before or after the print data (as appropriate).</p> <p>Character values can be in the extended ASCII range of 0 to 255 (hex 00 to FF). You can specify a non-printing character using its hexadecimal value by entering a backslash (\) followed by two hexadecimal characters. For example, to enter the escape character (hex 1B), type "\1B". If your string includes the back slash character itself, specify it as "\5C". Enter up to 240 characters in this field. The characters in the field are checked for hexadecimal values, converted if necessary, and stored internally. The maximum number of characters stored internally in the string is 80; any characters that exceed this are discarded.</p>

Instructions for setting up an LPD printer are different for different operating systems. See [LPD printing on page 163](#) for details.

Example To reset an LPD printer at the start of each print job, you can create a print queue named `clear_printer` that issues a PCL reset command (Escape-E) at the beginning of each job.

First, set up the print queue:

- a. Name the string: Type `reset_string` into the **String Name** field in row 1.
- b. Define the string's value: Type `"\1BE"` (Escape-E) into the **Value** field in row 1. (Alternatively, you could type `"\1B\45"`.)
- c. Name the queue: Type `clear_printer` into the **Queue Name** field in row 5.
- d. Set up the prepend string: Type `reset_string` into the **Prepend String** field in row 5.
- e. Leave the **Append String** field in row 5 blank.
- f. Set the queue type: Set the **Queue Type** field in row 5 to **RAW**.

Then, set up the printer to use the queue, making sure to specify `clear_printer` when asked for a queue name. (For details about setting up the printer, see [LPD printing on page 163](#).) After that, any print jobs sent to the printer either from the server or from a client computer that has set up that printer, includes a reset command at the beginning of the job.

USB Settings

If the HP Jetdirect external print server provides a USB connection to the network device (such as a USB printer), a link to USB configuration parameters is displayed.

Table 4-15 USB Settings tab

Item	Description
USB Speed	<p>(Read-only parameter, for USB 2.0 print servers only.) The auto-negotiated communication speed over the USB connection between the print server and the device.</p> <ul style="list-style-type: none">• Full Speed 12 Mbits/sec as specified in the USB v2.0 specifications, compatible with USB v1.1 specifications.• Hi-Speed 480 Mbits/sec for USB v2.0 devices only.• Disconnected USB port is not connected.
Preferred USB Communication Mode	<p>Highest level of USB communication capabilities when the print server tries to establish a communication level with the printer. If you change the current setting, unplug and then reconnect the USB cable, or turn the print server off and then on, to activate it.</p> <ul style="list-style-type: none">• AUTO (default) Automatically attempt to set the highest level available, starting with multiple interface (composite) USB devices, followed by IEEE 1284.4 and Multiple Logical Channels (MLC). If not successful, subsequent levels are attempted.• IEEE 1284.4 Allows multiple channels of simultaneous print, scan, and status communication, but without composite USB support. If not successful, subsequent levels are attempted.• Multiple Logical Channels (MLC) An HP-proprietary protocol that allows multiple channels of simultaneous print, scan, and status communication.• Bidirectional Basic two-way printer communications. Print data is sent to the printing device, and status information is returned.• Unidirectional One-way printer communication from the print server to the printing device. (This is the lowest communication level.) <p>The communication level set by the print server is reported on the HP Jetdirect configuration page.</p>
Status Page Language	<p>Page description language (PDL) for the HP Jetdirect configuration page data sent to the printer. Available options include PCL, ASCII, PostScript and HPGL2.</p> <p>When set to AUTO (default), the print server automatically attempts to detect and select a language supported by the device. Typically, HP-PCL is selected if available.</p>

Support Info

Configure links for support assistance. You can designate a support person and the phone number of an administrator for this device, as well as URL addresses for Web-based product and technical support.

Refresh Rate

Time period (in seconds) that the diagnostic pages are automatically updated. A value of zero (0) disables the refresh rate.

Select Language

This item is displayed if the HP Jetdirect Web pages support multiple languages. You can also select supported languages by using the language preference settings in your browser (see your browser's Help).

To display supported non-English languages, you must enable cookies in your browser settings.

Security: Settings

In the **SECURITY** section, the **Settings** item provides access to the following tabs: **Status** (default), **Wizard**, **Restore Defaults**. The available settings depend on your particular print server model.

Status

Select the **Status** tab to display the current security configuration settings of the print server. The settings displayed depend on the features supported by the print server.

Wizard

 **NOTE:** If you use HP Web Jetadmin to manage your devices, do not use this wizard. Instead, use HP Web Jetadmin to configure your network security settings.

Select the **Wizard** tab to open the initial **Wizard** page. If prompted with security alerts, click **Yes** to proceed.

The **Wizard** page identifies the current security level last configured on the print server. If a security level was not configured, the security level is **None**. However, if HTTPS is required for access to the networking pages, the default setting indicates **Custom**.

This page also allows you to run the HP Jetdirect Security Configuration Wizard to set or change the current security level. This wizard guides you through the print server's security configuration settings for your network. Click **Start Wizard** to run the wizard and open the **Security Level** page.

The optional configuration parameters presented by the wizard depend on your choice of security level. For an overview, see [Table 4-16 Wizard Security Levels on page 92](#).

 **NOTE:** If you improperly exit the wizard (for example, by failing to use the **Cancel** button), an **Operation Failed** screen appears. If this occurs, wait approximately two minutes and restart the wizard.

Table 4-16 Wizard Security Levels

Security Level	Description
Basic Security	<p>Requires that you configure an administrator password for configuration management. The administrator password is shared with other management tools, such as Telnet and SNMP applications. However, some management tools, such as Telnet, use plain-text communications and are not secure.</p> <p>Use the Admin. Account page to enter the administrator password. The administrator password is also used as the SNMP v1/v2 Set Community Name for SNMP management applications.</p> <p>NOTE: To clear the administrator password, apply blank entries using Custom Security, or see the Admin. Account page accessed through the Authorization menu.</p> <p>The Configuration Review page displays all the current settings that affect security. Click Finish to set your security selections.</p>

Table 4-16 Wizard Security Levels (continued)

Security Level	Description
Enhanced Security (Recommended)	<p>Adds to Basic Security by automatically disabling management protocols that do not use secure, encrypted communications (such as Telnet and FTP firmware updates, RCFG, SNMP v1/v2c). To change individual protocol settings, see Mgmt. Protocols on page 99.</p> <p>Use the Admin. Account page to enter the administrator password.</p> <p>NOTE: To clear the administrator password, apply blank entries using Custom Security, or see Admin. Account on page 94.</p> <p>Use the SNMP Configuration pages to configure specific SNMP settings:</p> <ul style="list-style-type: none">• Enable SNMPv3 (Full-featured print servers only) Enable SNMP v3 and create an SNMP v3 account. Not recommended if you manage devices using HP Web Jetadmin. See SNMP on page 83.• Enable SNMPv1/v2 read-only access Support current tools that rely on SNMP v1/v2 for device discovery and status. <p>The Configuration Review page displays all the current settings that affect security. Click Finish to set your security selections.</p>
Custom Security	<p>Manually set all available security settings supported by your print server. For more information on specific parameters and selections, see Mgmt. Protocols on page 99 and Authorization on page 94.</p> <p>Use the Admin. Account page to enter the administrator password.</p> <p>NOTE: To clear the Administrator Password, enter blank entries, or see Admin. Account on page 94.</p> <p>Use the Web Mgmt. page for HTTPS configuration, including certificates and encryption levels.</p> <p>Use the Management Tools page to configure management protocols that are not secure (such as RCFG, Telnet and FTP firmware updates).</p> <p>Use the SNMP Configuration pages to configure the following SNMP settings:</p> <ul style="list-style-type: none">• Enable SNMPv1/v2 Allow management software that uses SNMP v1/v2. If selected the SNMPv1/v2 Configuration page is displayed to configure SNMP community names.• Enable SNMPv3 (Full-featured print servers only) Create an SNMP v3 account. Do not create an SNMP v3 account if you manage devices using HP Web Jetadmin. See SNMP on page 83. <p>Use the Access Control page to control host access to the device. Available on selected full-featured print servers only.</p> <p>Use the Print Protocols and Services page to enable or disable network printing, print services, and device discovery protocols that can affect security.</p> <p>Use the Configuration Review page to display all the current settings that affect security. Click Finish to set your security selections.</p>

Restore Defaults

Restore the listed configuration parameters to factory default values. The parameters displayed depend on the features supported by the print server.

Only the configuration settings listed are restored to factory defaults. Other configuration settings are not affected.

Authorization

Use the **Authorization** page to control access to the device and to the device configuration and management features. You can also configure certificates for client and server authentication.

Admin. Account

Use this tab to set an administrator password for controlled access to HP Jetdirect configuration and status information. The administrator password is shared by HP Jetdirect configuration tools, such as the HP Embedded Web Server, Telnet, and HP Web Jetadmin. On selected printers, the password is shared with the printer (see [Printer Password Synchronization on page 94](#)).

If a password is set, and you attempt to access HP Jetdirect print server settings, you are prompted for a user name and *this password* before you are allowed access.

 **NOTE:** You can clear the administrator password by applying blank entries, or by a cold reset of the print server to factory-default settings.

You can synchronize HP Web Jetadmin and the SNMP v1/v2c Set Community Name by using the check box in the **Basic User Configuration** section. The administrator password is also used as the SNMP Set Community Name for SNMP v1/v2c management applications.

 **NOTE:** If you subsequently change the SNMP Set Community Name through the SNMP tab on the **Network Settings** page or by using HP Web Jetadmin, the two settings are no longer synchronized.

Printer Password Synchronization

(EIO and embedded print servers only.) Most printers provide password-protected access to printer configuration and status settings. The password is set through security Web pages provided by the printer. For these, the administrator password for the printer and the HP Jetdirect print server are synchronized so that the same password is used to access both printer and networking configuration pages. For printers that support password synchronization, the same password is used regardless of the HP Embedded Web Server page (printer security pages, or the HP Jetdirect **Admin. Account** page) in which the password was set.

If password synchronization is lost on these printers, recovery might require one of the following procedures:

- Restore both the printer and the HP Jetdirect print server to factory-default states (for example, through a cold reset), and then reconfigure your settings.
- Manually set the same administrator password using both the printer security page and the HP Jetdirect **Admin. Account** page.

Certificates

Use this tab to install, configure, and manage services for X.509v3 digital certificates. A digital certificate is an electronic message containing, among other things, a key (a short string used for encryption and decryption) and a digital signature. Certificates are typically issued and signed by a trusted third party (commonly called a certificate authority, or CA), which exists internal or external to the organization. Certificates can also be self-signed.

 **NOTE:** While self-signed certificates are permitted and allow data encryption, they do not ensure valid authentication. A self-signed certificate is similar to validating your own identity.

The **Certificates** page provides the status of the certificates installed on the HP Jetdirect print server:

- **Jetdirect Certificate** Used to validate the identity of the HP Jetdirect device to clients and to network authentication servers.

By factory default, a self-signed HP Jetdirect certificate is pre-installed, which allows the HP Embedded Web Server to use HTTPS and appear as a secure site when accessed by a Web browser.

Click **View** to view the contents of an installed HP Jetdirect certificate, or click **Configure** to update or install a new one. For more information, see [Configure certificates on page 95](#).

When installed, an HP Jetdirect certificate is saved after a cold reset, which is used to restore the print server to factory-default values.

- **CA Certificate.** (Full-featured print servers only) A certificate from a trusted third party, or certificate authority (CA), is used to validate the identity of a network authentication server during 802.1X authentication methods that use EAP. The authentication server's identity is validated when information on the CA certificate matches the information on a certificate received from the authentication server.

A CA certificate for the print server is used to sign the authentication server's certificate. Therefore, the certificate authority for the authentication server's certificate must also be used for the CA certificate.

Click **View** to view the contents of an installed HP Jetdirect certificate, or click **Configure** to update or install a new one. For more information, see [Configure certificates on page 95](#).

A CA certificate is not saved when the print server is reset to factory-default values.

Configure certificates

To update or install a certificate, click **Configure** to start the certificate management wizard. The screens displayed depend on the type of certificate (HP Jetdirect or CA) and your selections. [Table 4-17 Certificate configuration screens on page 95](#) provides a description of the screens and configuration parameters that are displayed.

 **NOTE:** If you improperly exit Certificates configuration by failing to use the **Cancel** button, for example, an **Operation Failed** screen appears. If this occurs, wait approximately two minutes and restart the wizard.

Table 4-17 Certificate configuration screens

Certificate Options screen. The options displayed depend on your print server model.

Table 4-17 Certificate configuration screens (continued)

- **Update Pre-Installed Certificate** Update the pre-installed, self-signed certificate. The certificate is overwritten. You can update the following item:

Certificate Validity Period

The browser identifies the certificate as self-signed for each new Web session, which can cause a security alert message. You can bypass this message by adding the certificate to the browser's certificate store or by disabling browser alerts (not recommended).

Self-signed certificates are not necessarily secure because the certificate owner is merely confirming his own identity instead of verification by a trusted third party. Certificates from a trusted third party are considered more secure.

- **Create Certificate Request** You are prompted for specific device and organizational information in the following screen:

Certificate Information

Use this option when an authentication protocol requires that you install an HP Jetdirect certificate issued by a trusted third party or certificate authority.

- **Install Certificate** Displayed only if there is a pending HP Jetdirect certificate request (to a trusted third party). When the certificate is received, use this option to install it. Once installed, this certificate overwrites the pre-installed certificate. You are prompted for information in the following screen:

Install Certificate

The certificate to be installed must be associated with a previous certificate request generated by the HP Embedded Web Server.

- **Install CA Certificate** (Full-featured print servers only) Displayed when you click **Configure** to install a CA certificate required for selected authentication protocols. You are prompted for information in the following screen:

Install Certificate

- **Import Certificate and Private Key** Import a previously acquired and known certificate as the HP Jetdirect certificate. If you import a certificate, the currently installed certificate is overwritten. You are prompted for information in the following screen:

Import Certificate and Private Key

- **Export Certificate and Private Key** Export the HP Jetdirect certificate currently installed on the print server for use on other print servers. You are prompted for information in the following screen:

Export the HP Jetdirect certificate and private key

- **Delete CA Certificate** (Full-featured print servers only) Remove the CA certificate installed on the HP Jetdirect print server. Displayed when a CA certificate for EAP authentication is installed.

CAUTION: If the CA Certificate is deleted, EAP authentication is disabled and network access is denied.

The CA Certificate is also removed on a cold-reset of the print server, where factory-default settings are restored.

Certificate Validity screen. Specify how long the HP Jetdirect self-signed certificate is valid.

Table 4-17 Certificate configuration screens (continued)

- Displays only when a self-signed certificate is pre-installed and you click **Edit Settings** to update the validity period. It specifies the current coordinated universal time (UTC).

Validity Start Date Calculated from the PC's clock settings.

Validity Period Number of days (1 to 3650) that the certificate is valid, starting from the **Validity Start Date**. A valid entry (1 to 3650) is required. The default is 5 years.

Certificate Information screen. Enter information for requesting a certificate from a Certificate Authority.

- **Common Name** (Required) For HP Jetdirect print servers, specify the FQDN or a valid IP address for the device.

Examples

Domain Name: `myprinter.mydepartment.mycompany.com`

IP address: `192.168.2.116`

The **Common Name** is used to uniquely identify the device. For HP Jetdirect print servers using EAP authentication, some authentication servers can require configuration with the **Common Name** as specified on the certificate.

If the default IP address 192.0.0.192 is set on the HP Jetdirect print server, it is probably invalid for your network. Do not use this default address to identify your device.

- **Organization** (Required) Specify the full legal name for your company.
- **Organizational Unit** (Optional) Specify your department, division, or other subgroup of your organization.
- **City/Locality** (Required) Enter the city or locality in which your organization is located.
- **State/Province** (Required for all countries/regions) Must contain at least three characters.
- **Country/Region** Two-character ISO 3166 country/region code. For example, use gb Great Britain or us for USA (required).

Install Certificate or **Install CA Certificate** screens.

Use the **Install Certificate** screen to install an HP Jetdirect certificate. (The **Install Certificate** option is not presented if there is no pending request.)

Use the **Install CA Certificate** screen to install a trusted certificate authority (CA) certificate for use during EAP authentication. (Full-featured print servers only.)

- Install a privacy enhanced mail (PEM/Base64) encoded certificate.
To install a certificate, specify the name and path of the file that contains the certificate. Or, click **Browse** to browse your system for the file.
Click **Finish** to complete the installation.
To install a certificate, it must be associated with a pending certificate request by the HP Embedded Web Server.

Import Certificate and Private Key screen. Import an HP Jetdirect certificate and private key.

Table 4-17 Certificate configuration screens (continued)

- Import an HP Jetdirect certificate and private key. When imported, the existing certificate and private key are overwritten.

The file format must be PKCS#12 encoded (.pfx).

To import a certificate and private key, specify the name and path of the file that contains the certificate and private key. Or, click **Browse** to browse your system for the file. Then enter the password that was used to encrypt the private key.

Click **Finish** to complete the installation.

Export the HP Jetdirect certificate and private key screen. Export the installed HP Jetdirect certificate and private key to a file.

- To export a certificate and private key, enter a password to use to encrypt the private key. Enter the password again to confirm it. Then click **Save As** to save the certificate and private key in a file on your system. The file format is PKCS#12 encoded (.pfx).

Access Control

Use this tab to display the access control list (ACL) on the HP Jetdirect print server. An ACL (or host access list) specifies individual host systems, or networks of host systems, that are allowed to access the print server and the attached network device. You can add up to 10 entries. If the list is empty (no hosts are listed), any supported system can access the print server.

 **NOTE:** Not all print servers or devices support ACL, and support is limited to IPv4 networks. For improved security and performance, use the IPsec/Firewall feature (if available) instead of ACL.

By default, hosts with HTTP connections (such as, the HP Embedded Web Server or IPP) can access the print server regardless of access control list entries. To disable HTTP host access, clear the **Allow Web Server (HTTP) access** check box at the bottom of the list.

 **CAUTION:** You can lose communication with the HP Jetdirect print server if your system is not properly specified in the list, or access via HTTP is disabled.

To use the access control list as a security feature, see [Security features \(V.40.xx\) on page 121](#).

Specify host systems by their IPv4 address or network number. If the network contains subnets, you can use an address mask to identify whether the IP address entry designates an individual host system or a group of host systems.

Examples:

IP Address	Mask	Description
192.0.0.0	255.0.0.0	Allow all hosts with network number 192.
192.1.0.0	255.1.0.0	Allow all hosts on network 192, subnet 1.
192.168.1.2		Allow the host with IP address 192.168.1.2. The mask 255.255.255.255 is assumed and is not required.

To add an entry to the access control list, specify a host using the **IP Address** and **Mask** fields, select the **Save** check box, and then click **Apply**.

To delete an entry from the list, clear the **Save** check box for that entry, and then click **Apply**.

To clear the entire access control list, clear all **Save** check boxes, and then click **Apply**.

Mgmt. Protocols

Use this item to access the management communications and other protocols that affect security.

Web Mgmt.

Use this tab to manage communications with the HP Embedded Web Server from Web browsers.

Secure, encrypted Web-based communication is provided through the HTTPS protocol. If configured to require HTTPS, the HP Embedded Web Server routes HTTPS communications through port 443, the well known port for HTTPS traffic. Although ports 80, 280, or 631 continue for IPP use, other non-secure communications, such as HTTP, are redirected to HTTPS. Redirection of your browser to use HTTPS can be transparent depending on your browser's capabilities.

 **NOTE:** IPP is not supported on value-based print servers.

By factory default, HP Jetdirect print servers and printers with IPsec support require HTTPS.

Although not recommended, you can allow non-secure HTTPS and HTTP communications by clearing the **Encrypt All Web Communication** check box.

To support the use of HTTPS communications, you must install an HP Jetdirect certificate. A factory default, self-signed certificate is installed for initial use. Click the **Configure** button to update the installed certificate, or to install a new one. For more information, see [Configure certificates on page 95](#).

The minimum encryption strength allowed must be specified when using an HP Jetdirect certificate. Select **Low** (default), **Medium**, or **High** encryption strength. For example, select **Low** to allow use of medium or high encryption levels. Select **High** to use only high encryption levels.

For each encryption strength, specify ciphers to identify the weakest cipher allowed.

 **NOTE:** Cipher suites support different levels of encryption strength. The cipher suites currently supported for encryption and decryption are data encryption standard (DES, 56-bit), RC4 (40-bit or 128-bit), and 3DES (168-bit).

Enter the **Web session Timeout** in minutes. This is the maximum amount of a time that a user can be idle before automatic logout occurs.

SNMP

Use this tab to enable or disable SNMP v1, v2c and v3 agents on the print server, depending on the print server model. For a description of SNMP selections, see [Table 4-12 SNMP tab settings on page 84](#).

SNMP v3

Full-featured HP Jetdirect print servers include an SNMP v3 agent for enhanced SNMP security. The SNMP v3 agent employs a user-based security model for SNMP v3 (RFC 2574), which features user authentication and data privacy through encryption.

The SNMP v3 agent is enabled when you create an initial SNMP v3 account on the print server. Once created, any properly configured SNMP management application can access or disable the account.

- △ **CAUTION:** Creating SNMP v3 accounts with the HP Embedded Web Server removes existing accounts. Also, you must implement the account information on the SNMP management application.

It is recommended that you use HP Web Jetadmin to configure SNMP v3 and other security settings on the print server.

To prevent access or interception during SNMP v3 account creation, disable Telnet and enable secure embedded Web communication using HTTPS.

Create the initial SNMP account by specifying the HMAC-MD5 authentication and CBC-DES data privacy encryption keys used by your SNMP v3 management application.

- △ **CAUTION:** SNMP v1 and v2c agents can coexist with the SNMP v3 agent. However, to fully secure SNMP access, you should disable SNMP v1 and v2c.

Other

Use this tab to enable or disable various protocols supported by the print server for printing, print services, and management. The items are described in [Table 4-18 Other protocols on page 100](#).

Table 4-18 Other protocols

Item	Description
Enable Print Protocols	<p>Select the print protocols to use: IPX/SPX, AppleTalk, or DLC/LLC. (Disable unused protocols to prevent access.)</p> <p>For network environments that use these protocols, see Introducing the HP Jetdirect print server on page 1.</p> <p>Because the HP Embedded Web Server uses TCP/IP, you cannot disable this protocol.</p> <p>NOTE: On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by factory default.</p>
Enable Print Services	<p>Select the print services to use: port 9100, LPD, IPP, FTP, or Web Services Print. (Disable unused print services to prevent access.)</p>

Table 4-18 Other protocols (continued)

Item	Description
Enable Device Discovery	<p>Select device discovery protocols supported by the print server:</p> <p>SLP</p> <p>If enabled, the HP Jetdirect print server sends SLP packets, which are used by system applications for automated discovery and installation.</p> <p>If disabled, SLP packets are not sent.</p> <p>If SLP uses multicast protocols, you must enable multicast IPv4.</p> <p>Bonjour</p> <p>If enabled, Bonjour services are provided. Bonjour is typically used on for IP address and name resolution (through UDP port 5353) where a conventional DNS server is not used.</p> <p>For Bonjour operation, you must enable multicast IPv4.</p> <p>Multicast IPv4</p> <p>If enabled, the print server sends and receives IP version 4 multicast packets. If disabled, other protocols that use multicast protocols (such as Bonjour and SLP), might be disabled without notification.</p> <p>WS-Discovery Microsoft Web Services Dynamic Discovery (WS Discovery) protocols on the print server.</p>
Naming Resolution	<p>Indicates whether link local multicast name resolution (LLMNR) requests are responded to over IPv4 and IPv6.</p>
Enable Management Protocols	<p>Select the management protocols to use: Telnet, FTP Firmware Update, or RCFG. Telnet and FTP are not secure protocols and device passwords can be intercepted.</p> <p>RCFG, a remote IPX configuration protocol used by older management tools to configure Novell NetWare parameters. Disabling RCFG does not affect direct mode printing using IPX/SPX.</p> <p>It is recommended that you disable Telnet, FTP firmware upgrades, and RCFG.</p>

802.1X Authentication

(Full-featured print servers only) Use this item to configure 802.1X authentication settings on the HP Jetdirect print server as required for client authentication on your network. You can also reset the 802.1X authentication settings to factory default values.

△ **CAUTION: If you change the 802.1X authentication settings, you can lose your connection.** If communication with the printer/MFP device is lost, you might need to reset the print server to a factory default state and then reinstall the device.

For most 802.1X networks, the infrastructure components (such as LAN switches) must use 802.1X protocols to control a port's access to the network. If these ports do not allow partial or guest access, you might need to configure the print server with your 802.1X parameters prior to connection.

To configure initial 802.1X settings before connecting to your network, use an isolated LAN, or a direct computer connection using a cross-over cable.

The supported 802.1X authentication protocols and associated configuration depend on the print server model and firmware version. Available configuration settings are listed in [Table 4-19 802.1X configuration settings on page 102](#).

Table 4-19 802.1X configuration settings

Item	Description
Enable Protocols	<p>Enable (check) the supported protocols used for 802.1X authentication on your network.</p> <ul style="list-style-type: none"> • LEAP A Cisco Systems proprietary protocol that uses passwords for mutual authentication (that is, the client and the server authenticate each other). • PEAP Uses digital certificates for network server authentication and passwords for client authentication. PEAP requires an EAP User Name, EAP Password, and CA Certificate. Dynamic encryption keys are also used. • EAP-TLS Uses a mutual authentication protocol based on digital certificates for authentication of both the client and the network authentication server. EAP-TLS requires an EAP User Name, HP Jetdirect certificate and CA certificate. Dynamic encryption keys are also used.
User Name	EAP/802.1X user name (up to 128 characters maximum) for this device. The default is the default host name of the print server, NPIxxxxxx, where xxxxxx are the last six digits of the LAN hardware (MAC) address. You can also use DOMAIN\username, where DOMAIN is the Windows NT 4 style DOMAIN name, username@domain, or username.
Password, Confirm Password	EAP/802.1X password (up to 128 characters maximum) for this device. Enter the password again in the Confirm Password field to verify.
Server ID	Server ID validation string to identify and validate the authentication server. The string is specified on the digital certificate issued by a trusted certificate authority (CA) for the authentication server. Can contain a partial string (right-most characters) unless the Require Exact Match check box is selected.
Encryption Strength	Minimum encryption strength used during communication with the authentication server. Select Low , Medium , or High encryption strength. For each encryption strength, ciphers are specified to identify the weakest cipher allowed.
Jetdirect Certificate	A self-signed HP Jetdirect certificate is pre-installed. To install a replacement, click Configure .
CA Certificate	<p>To validate the authentication server's identity, the authentication server's certificate or a CA (or "Root") certificate must be installed on the print server. This CA certificate must be issued by the certificate authority who signed the authentication server's certificate.</p> <p>To configure or install a CA certificate, click Configure.</p>
Authentication Behavior: Reauthenticate on Apply	<p>Control authentication when you click Apply on this page, assuming valid configuration entries were made.</p> <p>NOTE: Does not apply to security or other configuration wizards. Changes to parameters through a wizard always causes the print server to re-authenticate.</p> <p>If disabled (default), the print server does not attempt re-authentication unless configuration changes cause the print server to disconnect and reconnect to the network.</p> <p>If enabled, the print server always attempts to re-authenticate using the configuration values.</p>
Restore Defaults	Restore 802.1X configuration settings to factory default values.

IPsec/Firewall

Configure or view the IPsec or Firewall policy for the print server. You can enable or disable IPsec/Firewall operation on the print server, and configure the *default* rule for IP packets that are not covered by IPsec/Firewall rules.

Rules that define the IPsec/Firewall policy are configured through an IPsec/Firewall wizard, which is run when you click **Add Rules**. For more information, see [IPsec/Firewall configuration \(V.40.xx\)](#) on page 105.

Assessment

Use the **Assessment** tab to verify that the print server attempting connection to network resources is in full compliance with corporate governance policy. You can require that server policy and device configuration changes are current before allowing connection. HP Jetdirect, acting as an assessment client, collects the information and passes it to the assessment server. The assessment server then determines which network resources the client can access.

By default, assessment is enabled and all assessment types are selected.

Item	Description
Enable Assessment	Select the check box to enable assessment. Clear this check box to disable assessment. (By default, assessment is enabled.)
DHCP	Select the check box to use DHCP as the transport method for moving assessment data between the device (client) and the assessment server.
802.1x	Select the check box to use 802.1x to transport assessment data between the device and the assessment server.
Primary Server	Select the address type (Preconfigured, IPv4, IPv6, or FQDN/Host Name), and provide the IP address, FQDN, or Host Name, and the port number for the primary assessment server. If the primary server is not accessible, the backup server is used.
Backup Server	Select the address type, and provide the IP address, FQDN, or host name, and the port number for the secondary assessment server. The backup server is used if the primary server is not accessible.
Check for Assessment Server Policy Changes Every nn Days	Enter the number of days (between 1 and 7) to wait before checking the assessment server for corporate governance policy changes.
Check for Device Configuration Changes Every nn Hours	Enter the number of hours (between 1 and 24) to wait before checking the assessment server for device configuration changes.

Network Statistics

Select the **General** tab to display counter values and other status information currently stored on the HP Jetdirect print server. This information is often useful to diagnose performance and operational problems associated with the network or network device.

Protocol Info

List the various network configuration settings on the HP Jetdirect print server for each protocol. Use these lists to validate your settings.

Configuration Page

Provides a view of the HP Jetdirect configuration page that contains a summary of the status and configuration information. The contents of this page are described in [HP Jetdirect configuration pages on page 135](#).

Other Links

? (Help)

On **Networking** tab pages, click **?** to display a Help page, which provides a quick summary of the HP Embedded Web Server features. In the Help page, links to HP support documents that provide updated information are available (Internet access is required).

Support

Display the values set in the [Support Info on page 90](#) tab in the [Other Settings on page 85](#) menu. Information can include the name and telephone number of a support person, or Web links to product and technical support pages. The default Web links include HP online support and HP product information Web pages (Internet access is required).

5 IPsec/Firewall configuration (V.40.xx)

(Full-featured print servers only) IPsec/Firewall features provide network-layer security on both IPv4 and IPv6 networks. The Firewall provides simple control of IP addresses that are allowed access. Internet protocol security (IPsec, RFC 2401) provides the additional security benefits of authentication and encryption,

IPsec configuration is relatively complex. However, because IPsec provides security at the network layer and can be relatively independent of application layers, the opportunity for secure host-to-host communications over a widespread network, such as the Internet, is greatly enhanced.

- If IPsec is supported, you can control IP traffic using both Firewall and IPsec protection.
- If IPsec is not supported, you can control IP traffic using Firewall protection.

 **NOTE:** In addition to Firewall and IPsec protection at the network layer, the print server also supports an SNMPv3 agent at the application layer for management application security, and open secure sockets layer (SSL) standards at the transport layer for secure client-server applications, such as client-server authentication or HTTPS Web browsing.

For IPsec/Firewall operation on the print server, you must configure an IPsec/Firewall policy to apply to specified IP traffic. IPsec and Firewall policy pages are accessed through the HP Embedded Web Server and displayed by your Web browser. Typical IPsec and Firewall policy pages are shown below.

 **NOTE:** To ensure communications with an HP Jetdirect print server configured with an IPsec policy, ensure that computer systems communicating with the print server are properly configured. IPsec policies configured on the print server and computer systems must be compatible. Otherwise, connections will fail.

After a policy is configured, it is not activated until you click **Apply** button.

Figure 5-1 Firewall Policy page


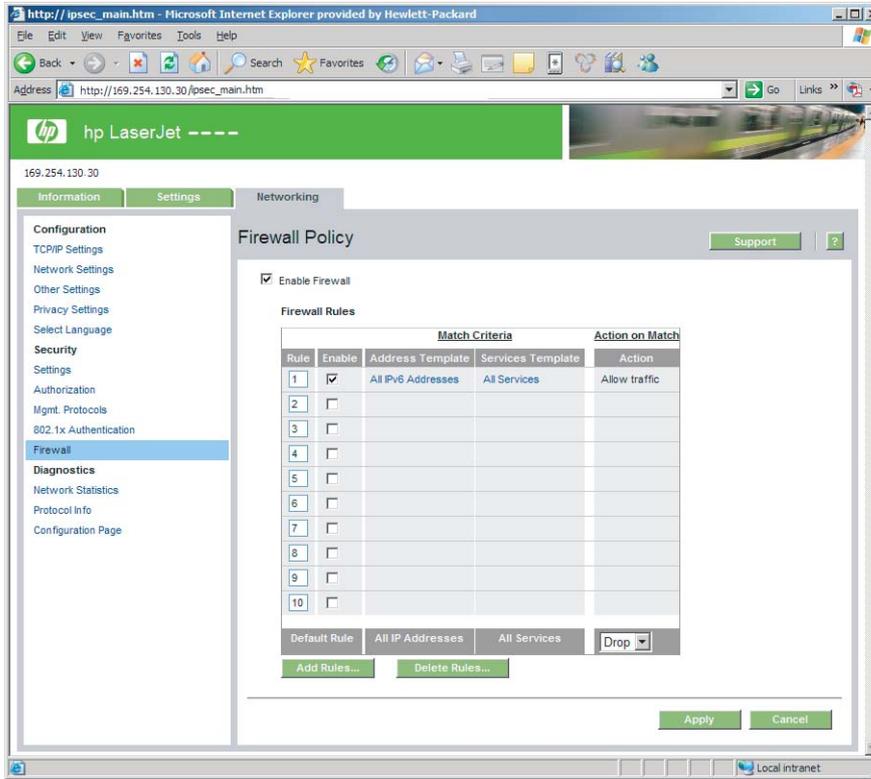


Figure 5-2 IPsec Policy page

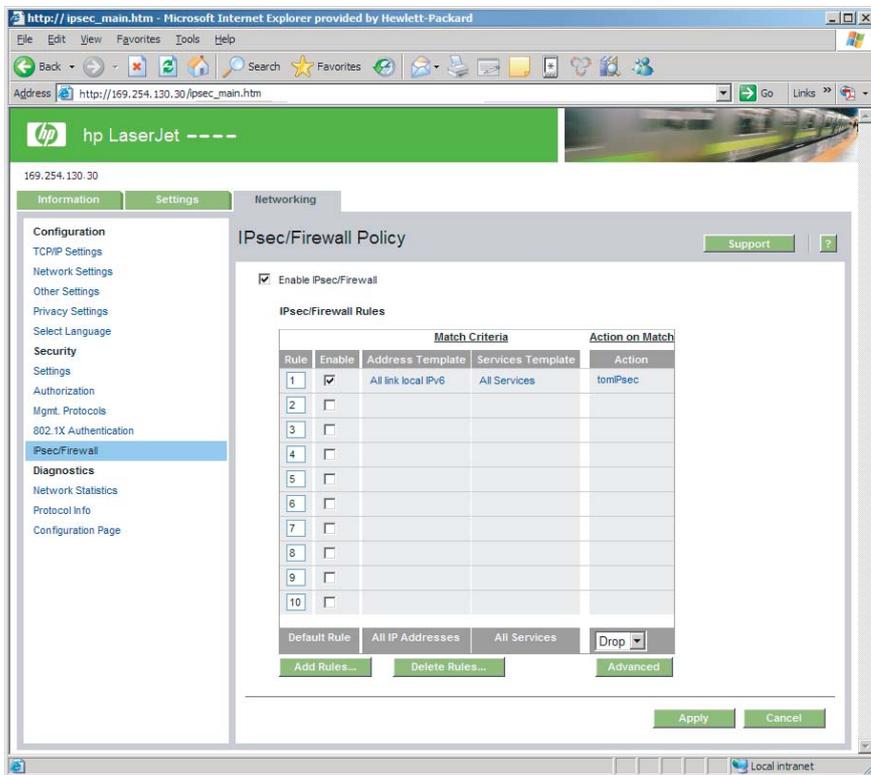

The items on the IPsec/Firewall policy pages are described in the following table:

Table 5-1 IPsec/Firewall Policy page

Item	Description
Enable IPsec/Firewall or Enable Firewall	Select the check box to enable your IPsec or Firewall policy. Clear this check box to disable IPsec/Firewall operation.
IPsec/Firewall Rules	<p>Configure up to ten rules in descending order of precedence. For example, Rule 1 is higher in precedence than Rule 2.</p> <p>Define each rule using the following fields:</p> <ul style="list-style-type: none">• Enable Select whether a configured rule is enabled or disabled for the policy.• Address Template Set the IP addresses for which the rule applies. Select among several predefined templates, or specify a custom template. Click on a template entry to view or modify the template configuration.• Services Template Identify the services for which the rule applies. Select among several predefined templates, or specify a custom template. Click on a template entry to view or modify the template configuration. <p>CAUTION: If the All Services template for a rule is not specified, a security risk can exist. Future networking applications deployed after the IPsec Policy is in place might not be IPsec-protected unless the All Services template is used.</p> <p>For example, installing a third-party Chai service plug-in, or upgrading firmware for the printer or print server, can result in a new service that is not covered by the IPsec policy. Review policies whenever firmware is updated or a new Chai applet is installed.</p> • Action on Match Define how to process the IP traffic that contains the addresses and services specified. <p>For Firewall operation, the traffic is allowed or dropped, depending on the action specified by the rule.</p> <p>For IPsec operation, the traffic is allowed without IPsec protection, dropped, or IPsec-protected using an IPsec template specified for the rule. Click on a template entry to view or modify the template configuration.</p>
Default Rule	<p>Indicate whether the default rule drops or allows the traffic. The default rule specifies whether to process IP packets that do not match the configured rules.</p> <p>Select Drop (default) to discard traffic not covered by the configured rules.</p> <p>Select Allow to allow traffic that is not covered by the configured rules. Allowing IP packets that do not match the configured rules is not secure.</p> <p>For an example, see Default Rule example on page 108.</p>
Add Rules	Select Add Rules to configure rules using the IPsec wizard..
Delete Rules	Select Delete Rules to remove one or more rules from the policy.
Advanced	<p>Configure a Failsafe feature to prevent lock out of the print server over HTTPS (secure Web browser access) during IPsec/Firewall policy set up.</p> <p>You can allow selected multicast and broadcast traffic to bypass your IPsec/Firewall policy. This might be required for device discovery by system installation utilities.</p>

Default Rule example

The following illustrates the print server behavior depending on whether the default rule is set to **Allow** or **Drop** (default).

IPsec Policy Configuration Example: IPsec is enabled on the print server with the following rule:

- **All IPv4 Addresses**
- **All Jetdirect Print Services**
- A simple IPsec template for these addresses and services is configured.

If the **Default Rule** is set to **Allow**, then:

- An IP packet that is not IPsec-protected, but with an IPv4 address directed to printing port 9100 is *not* processed (dropped) because it violates the configured rule.
- An IP packet that is not IPsec-protected, but with an IPv4 address to a service port other than port 9100 (such as Telnet), is allowed and processed.

If the **Default Rule** is set to **Drop**, then:

- An IP packet that is not IPsec-protected, but with an IPv4 address directed to printing port 9100 is *not* processed (dropped) because it violates the configured rule.
 - An IPsec packet with IPv4 address directed to printing port 9100 is allowed and processed because it matches the rule.
 - A non-IPsec packet with IPv4 address to the Telnet port is dropped because it violates the default rule.
-

IPsec security associations (SA)

If a packet is IPsec-protected, there must be an IPsec security association (SA) for it. A security association defines how an IP packet from one host to another is protected. Among many things, it defines the IPsec protocol to use, the authentication and encryption keys, and duration of key use.

An IPsec SA is unidirectional. A host can have an inbound SA and an outbound SA associated with particular IP packet protocols and services, and the IPsec protocol used to protect them.

When properly configured, the IPsec rules define the security associations for IP traffic to and from the HP Jetdirect print server and can ensure all traffic is secure.

HP Jetdirect IPsec/Firewall wizard


Use the IPsec/Firewall wizard to create one or more rules to be applied to IP traffic. Click **Add Rules** to start the IPsec/Firewall wizard.

Enter up to ten rules, each rule specifying the host addresses, services, and the action to take for those addresses and services. Depending on whether IPsec is supported by the print server and device, the following actions are available:

- Allow traffic. If IPsec/Firewall is supported, allow IP traffic that is not protected by the IPsec/Firewall policy.
- Drop traffic. Do not process (discard) the specified IP traffic.
- Require traffic to be protected with the IPsec/Firewall policy. You are prompted to configure an IPsec template indicating the IPsec authentication/encryption settings to apply to the specified IP traffic.

See the following illustration.

Figure 5-3 Use the IPsec Wizard to configure rules

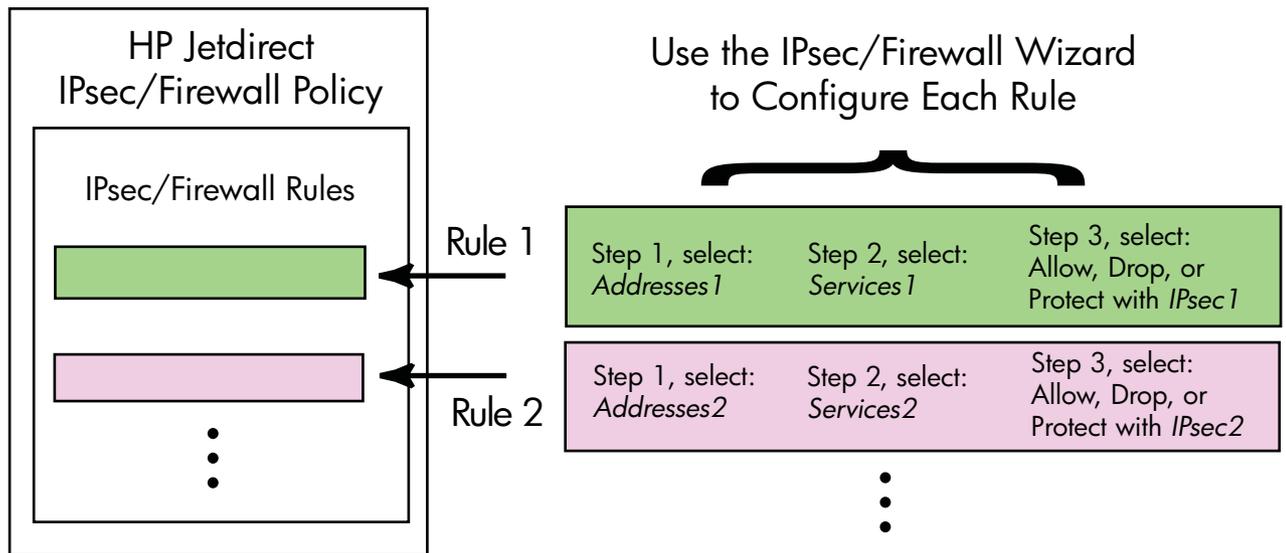

Limitations to rules, templates and services

Limitations to rules, templates, and services are summarized in the following table.

Table 5-2 Limitations to rules, templates and services

Item	Limit
Maximum number of rules.	10
Maximum number of Address Templates.	8

Note the following:

- **All IP Addresses** Results in two (2) address template rules. One for all IPv4 addresses, and another for all IPv6 addresses.
- **All non link local IPv6** Results in four (4) address template rules:
 - :: to FE7F:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF for both local and remote addresses
 - :: to FE7F:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF for local addresses
 - FE81:: to FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF for remote addresses

Table 5-2 Limitations to rules, templates and services (continued)

Item	Limit
<ul style="list-style-type: none"> ◦ FE81:: to FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF for local addresses, :: to FE7F:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF for remote addresses ◦ FE81:: to FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF for both local and remote addresses ● All Broadcast/Multicast Addresses Results in four (4) address template rules: <ul style="list-style-type: none"> ◦ 224.0.0.0 to 239.255.255.255 IPv4 local addresses and all IPv4 remote addresses ◦ A single IPv4 local address, and all IPv4 remote addresses ◦ 255.255.255.255 local address, and all IPv4 remote addresses ◦ FF00:: / 8 local IPv6 addresses, and all IPv6 remote addresses <p>NOTE: To avoid multiple rules for these predefined address templates, you can create custom address templates.</p>	
Maximum number of user-defined address templates.	8
Maximum number of services you can add to a user-defined service template.	64
<p>NOTE: The predefined All Services template is not subject to this limitation and includes all services supported by the print server.</p>	
Maximum number of services you can add to the policy.	64
For example, if a user-defined service template consists of 64 services, then it is the only service template you can use.	
Maximum number of service templates in the policy.	10
Maximum number of user-defined custom service templates.	10
Maximum number of IPsec templates in the IPsec policy.	5
Maximum number of user-defined custom IPsec templates.	5

Step 1: Specify Address Template

When you select **Add Rules**, the available address templates are listed in the **Address Templates** field by name. Select a predefined template, or click **New** to create a custom template using the **Create Address Template** page, described below.

To view or delete a template in the list, select it and click **View** or **Delete** (you cannot delete some predefined templates).

After selecting an address template, click **Next**.

Create Address Template

Items on the **Create Address Template** page are described in the following table:

Table 5-3 Create Address Template page

Item	Description
Address Template Name	Name of the custom address template. The name is added to the Specify Address Template page. NOTE: The address template name must be unique.
Local Address	Select or specify the IP addresses for which this rule applies. These addresses are assigned to the HP Jetdirect print server and used, for example, when DHCP servers assign IP addresses from a scope of addresses. Specify a unique IP address directly or through a prefix.
Remote Address	Select or specify the IP addresses for which this rule applies. These addresses are associated with remote hosts and are used, for example, when DHCP servers assign IP addresses from a scope of addresses. Specify unique IP address ranges directly or through a prefix.

Step 2: Specify Service Template

The available service templates for which a rule applies are listed in the **Service Templates** field by name. Select a predefined template, or click **New** to create and add a custom template to the list.

- △ **CAUTION:** If the **All Services** template for a rule is not specified, a security risk can exist. Future networking applications that are deployed after the IPsec Policy is in place might not be IPsec-protected unless the **All Services** template is used.

To view or delete a template in the list, select it and click **View** or **Delete** (you cannot delete some predefined templates).

Select a service template, then click **Next**.

Create Service Template

Items on the **Create Service Template** page are described in the following table.

Table 5-4 Create Service Template page

Item	Description
Service Template Name	Name for a custom service policy template. This name is added to the list of available services on the Specify Service Template page. NOTE: The service template name must be unique.
Selected Services	Specify services associated with the Service Template Name . To add services, click Manage Services .
Manage Services	Create standard or custom services for this service template. This opens the Manage Services page.

Manage Services

Items on the **Manage Services** page are described in the following table.

1. Select one or more services for your service template. To select a listed service, click the check box for the service.
2. To create and add a custom service to the list, click **Manage Custom Services**.
3. After the desired services are selected, click **OK**.

Table 5-5 Manage Services page

Item	Description
Custom Services	List of user-defined custom services.
Common Printer/MFP Services	List of common printer/MFP services supported by the print server.
Manage Custom Services	Click to create and manage user-defined services.

Manage Custom Services

Use this page to add or remove *custom* services to the **Manage Services** page. To add a custom service, use the following steps:

1. Enter a name for the custom service.
2. Specify the **Protocol**, **Service Type**, and **Service Port** or **ICMP Message Type** for this custom service.
3. Click **Add** to add the service to the **Configured Custom Services** list.
4. Click **OK** to save your changes. Or, click **Cancel** to discard your changes.

Table 5-6 Manage Custom Services page

Item	Description
Name	Name for the custom service. NOTE: The custom service name must be unique.
Protocol	Protocol for this custom service. The default protocol is TCP. Other selections include UDP, ICMPv4/v6, and IGMPv2. <ul style="list-style-type: none">• For TCP or UDP, specify the local Printer/MFP ports and remote host ports for the service.• For ICMPv4 or ICMPv6, specify an ICMP message type for the service. ICMP message types are based on standards and are well known.• For IGMPv2, local/remote ports or ICMP message types are not configured. All IGMP messages types are assumed.
Service Type	Service type: <ul style="list-style-type: none">• Printer/MFP Service (default): Local service on the HP Jetdirect print server or device.• Remote Service: Service on a remote host.

Table 5-6 Manage Custom Services page (continued)

Item	Description
Service Port	For TCP or UDP, select the ports for this custom service to use on the local printer/MFP, and the remote hosts. The default selection is Any Port . Depending on the service, select Port Range or Specific Port , then enter the port range or port in the fields provided.
ICMP Message Type	For ICMPv4 or ICMPv6, enter the ICMP message type number to use by the service. ICMP does not use ports. Instead, it uses well-known message types. NOTE: ICMP messages are typically used for error, control or information messages between network hosts.
Add	Add the custom service to the Configured Custom Services list.
Configured Custom Services	Custom services that were configured.
Delete	Select the service to delete and click Delete . You cannot delete a custom service that is specified for use by an active service template.

Step 3: Specify Action

Select an action for the print server for the addresses and services specified for this rule. Available actions depend on whether IPsec is supported.

- Allow traffic. If IPsec is supported, allow traffic to pass without IPsec protection.
- Drop traffic. Do not process (discard) the specified IP traffic.
- Require traffic to be protected with an IPsec/Firewall policy. If IPsec/Firewall features are supported, you are prompted to select or configure an IPsec template to be applied to the specified IP traffic.

Specify IPsec/Firewall Template

Any prior IPsec templates (for example, for other rules) are listed in the **IPsec/Firewall Templates** field. Because IPsec templates are network dependent, predefined factory default templates are not supplied.

- If the list is empty, the **Create IPsec Template** page appears instead, so that you can create a template.
- If a desired IPsec template is not in the list, click **New** to create a custom template using the **Create IPsec Template** page.

To view or delete a listed template, select it and click **View** or **Delete** as appropriate.

After an IPsec template is added to the list and selected, click **Next** to complete the rule.

Create IPsec Template

Use this page to create an IPsec template and to specify how security associations (SAs) are created (manually or dynamically). To create an IPsec template, use the following steps:

1. Enter a unique name for the template.
2. Select an authentication type. See the item descriptions in the following table.
3. Click **Next**.

 **NOTE:** The subsequent configuration pages depend on your authentication type selection (Internet Key Exchange or Manual Keys).

Table 5-7 Create IPsec Template page

Item	Description
IPsec Template Name	Custom IPsec template name. This name is added to the Specify IPsec Template page. NOTE: The IPsec template name must be unique.
Authentication Type	Select the authentication type. Hosts specified in the Address template must negotiate IPsec security settings during a session. During negotiation, authentication must occur to validate sender/receiver identities. <ul style="list-style-type: none">• Internet Key Exchange (default) Use Internet key exchange (IKE) protocols for authentication and encryption and to create security associations.<ul style="list-style-type: none">◦ Version Select the IKE version (IKEv1 or IKEv2).◦ Set IKE Defaults Select a default security profile for IKE operation. Several predefined profiles are provided. To configure a custom security profile, select the Specify Custom Profile option.◦ Preview IKE Defaults View the settings for a selected IKE default security profile.If you select IKE for authentication and a default security profile, click Next to display the Identity Authentication page.• Manual Keys Configure IPsec authentication/encryption protocols and keys manually. Click Next to display the IPsec Protocols page.

Identity Authentication

Use this page to choose an identity authentication method:

- **Pre-Shared Key**
- **Certificates**
- **Kerberos**

Identity Authentication page items are described in the following table.

Table 5-8 Identity Authentication page

Item	Description
Pre-Shared Key	<p>Select the Identity Type. Choose from Distinguished Name, FQDN, E-mail, Key-ID, or IP Address.</p> <p>Enter the Identity for the identity type that you selected.</p> <p>Indicate whether the Identity is ASCII or Hex.</p> <p>Enter a pre-shared key (ASCII string) in the Key field. This pre-shared key is shared by all hosts specified by this rule. If used, it should be protected. Any host that knows this key can be authenticated.</p>
Certificates	<p>Use certificates for authentication. A self-signed HP Jetdirect certificate is pre-installed by factory default, which you can replace. In addition, you must install a CA certificate for server authentication.</p> <ul style="list-style-type: none"><li data-bbox="651 667 1158 688">● Status Indicates whether a certificate is installed.<li data-bbox="651 716 1254 737">● View Display the certificate data of an installed certificate..<li data-bbox="651 764 1094 785">● Configure Manage or install a certificate. <p>For information on requesting, configuring and installing certificates, see Configure certificates on page 95.</p>
Kerberos	<p>Use Kerberos authentication.</p> <p>The status is displayed (Configured or Not Configured).</p> <p>To view data for a configured authentication, click View. To configure a new authentication, click Configure.</p>

Kerberos

You can configure the HP Jetdirect print server for Kerberos authentication manually, or by importing configuration files. Items on the **Kerberos** page are described in the following table.

Table 5-9 Kerberos page

Item	Description
Manually Specify Configuration	Manually configure the print server for Kerberos authentication. Click Next to display the Kerberos Settings page.
Import Configuration Files	<p>Configure the print server for Kerberos authentication by importing configuration files.</p> <ul style="list-style-type: none">• conf File Enter or browse to the krb5.conf file. In the <code>libdefaults</code> section, include the <code>default_realm</code> and <code>clockskew</code> tag entries. In the <code>realms</code> section, include the <code>kdc</code> tag entry.• keytab File Enter or browse to a Kerberos keytab file. Use the <code>Ktpass.exe</code> command-line tool (the version prior to Windows Server 2008 Support Pack 1) to generate the keytab file. Use the principal name type <code>KRB5_NT_PRINCIPAL</code>, and the encryption type <code>DES-CBC-MD5</code>.• Time Sync Period Specify the time interval (in minutes) that the HP Jetdirect print server requests to synchronize its clock with a simple network time protocol (SNTP) time server.• SNTP Server Specify the FQDN or IP address of an SNTP time server, if required. By default, the SNTP server is the server used as the key distribution center (KDC). <p>Click Next to return to the Identity Authentication page, and confirm that Kerberos status indicates that it is Configured.</p>

Kerberos Settings

Use the wizard to manually configure Kerberos account settings on the print server.

1. Use the **Kerberos Settings** page to provide Kerberos account and configuration settings.
2. Click **Next** to return to the **Identity Authentication** page, and confirm that Kerberos status indicates **Configured**.

Table 5-10 Kerberos Settings page

Item	Description
KDC Server	<p>FQDN of the domain controller used as the Kerberos KDC.</p> <p>The FQDN consists of the device's host name and domain name. For example, <code>kdc01.support.hp.com</code> is a fully qualified domain name, where <code>kdc01</code> is the host name and <code>support.hp.com</code> is the domain name.</p>
Principal Realm	<p>Kerberos principal realm in the form principal@REALM.</p> <p>A unique <i>principal</i> name is associated with each Kerberos account. For the HP Jetdirect print server active directory account, the principal is the user name for the print server.</p> <p>A Kerberos realm is similar in concept to a Windows domain and contains all the users, computers and services within a Kerberos installation. The realm is case-sensitive, and is typically the DNS domain name specified in all uppercase characters. For example, if the domain name is <code>hp.com</code>, the realm is <code>HP.COM</code>.</p>
Password	Password for the HP Jetdirect account configured on active directory.
Encryption Type	Encryption type supported by the HP Jetdirect print server.

Table 5-10 Kerberos Settings page (continued)

Item	Description
Key Version Number	Version number for the encryption keys associated with the principal and password.
Clock Skew	<p>Clock skew is a measure of allowed differences between clocks during transactions. A Kerberos installation uses clocks that are reasonably synchronized. When the HP Jetdirect print server checks time stamps of incoming packets from clients, the clock skew specifies the time interval (in seconds) within which the HP Jetdirect print server accepts a packet. If the time interval is exceeded, the packet is discarded.</p> <p>NOTE: Timing differences between the HP Jetdirect print server and a domain controller depends on the clock skew configuration on the domain controller.</p>
Time Sync Period	Time interval (in minutes) that the HP Jetdirect print server requests to synchronize its clock with an SNTP time server.
SNTP Server	FQDN or IP address of an SNTP time server, if required. By default, the SNTP server is the server used as the KDC.

IKEv1/IKEv2 Phase 1 (Authentication)

Use IKE to create security associations dynamically. Configure SA parameters for authentication and to securely generate IPsec session keys for encryption and authentication algorithms. Items on this page are described in the following table.

Table 5-11 IKEv1/IKEv2 Phase 1 (Authentication) page

Item	Description
Negotiation Mode	<p>(Required) IKE provides two modes of negotiation during an exchange for keys and security services to be used for a Security Association:</p> <p>Main Uses identity protection between the hosts. This method is slower but secure.</p> <p>Aggressive Uses half the message exchanges. It is faster, but less secure.</p>
Cryptographic Parameters	<p>(Required) Diffie-Hellman Groups Allows a secret key and security services to be securely exchanged between two hosts over an unprotected network. A Diffie-Hellman group determines the parameters to use during a Diffie-Hellman exchange. Multiple well-known Diffie-Hellman groups are listed.</p> <p>IKEv1 supports up to DH-18.</p> <p>IKEv2 supports up to DH-24.</p> <p>To change the entries in the list, click Edit. Selecting all the groups results in a single negotiated group.</p>
Encryption and Authentication	<p>(Required) Encryption methods and strengths, and the authentication methods to use.</p> <p>Selecting all the methods results in a single negotiated method.</p>
Security Association	<p>(Required) Specify the SA Lifetime, in seconds (30 to 86400), that the keys associated with this security association are valid.</p>

IKEv1/IKEv2 Phase 2 / Quick Mode (IPsec Protocols)

Items on this page are described in the following table.

Table 5-12 IKEv1/IKEv2 Phase 2 / Quick Mode Settings (IPsec Protocols) page

Item	Description
Encapsulation Type	Specify how the selected IPsec protocols (ESP or AH) are encapsulated: <ul style="list-style-type: none"> • Transport (default) Protect only the user data in each IP packet. Do not protect the IP packet header. • Tunnel Protect all packet fields, including the header.
Cryptographic Parameters	Set the encryption methods and strengths, and the authentication methods used: <ul style="list-style-type: none"> • ESP IPsec encapsulating security payload (ESP) protocol for IP packets. ESP headers are inserted in packets to ensure privacy and integrity of packet contents. Select among the supported encryption methods and strengths and the authentication methods to use for data protection. • AH IPsec authentication header (AH) protocol for IP packets. AH headers are inserted in packets to protect integrity of packet contents through cryptographic checksums. Select among the supported authentication methods. <p>CAUTION: IPsec AH might not function properly in environments that use network address translation (NAT).</p> <p>NOTE: You cannot use ESP authentication if AH is enabled. If you enable ESP and AH, you must select AH authentication methods.</p>
Security Association	SA Lifetime Security association lifetime in seconds (30 to 28800), the number of kilobytes (10 to 4294967295 Kb), or both. Within the limits specified, shorter lifetimes provide improved security depending on the frequency of SA use. Set to zero (0) to disable.
Advanced IKE Settings	Click to configure advanced IKE settings.

Advanced IKE Settings

The **Advanced IKE Settings** page contains the configuration settings described in the following table.

Table 5-13 Advanced IKE Settings page

Item	Description
Replay Detection	Set the IPsec anti-replay algorithm. IPsec protocols support anti-replay services to prevent message interception for later use, such as attempting to gain access to resources.
Key Perfect Forward Secrecy (Session PFS)	Set session perfect forward secrecy (PFS) for key protection. When secret keys are periodically replaced, PFS indicates that the new keys are independently derived and unrelated to the prior keys. This can ensure that data protected by the new keys is secure. While PFS provides additional security, it requires additional processing overhead.
Sequence Number	Set the sequence number at 32 bit, 64 bit, or both 32 and 64 bit.
Diffie-Hellman Groups	Diffie-Hellman Groups (For Session PFS only) Multiple well-known Diffie-Hellman groups that can be used are listed. To change the entries in the list, click Edit .

IPsec Protocols (Manual Keys)

Items on the **IPsec Protocols** page are described in the following table.

 **NOTE:** You cannot use IPv4 address ranges with manual keys. Instead, use a specific IP address.

To use manual keys for key negotiation, use the following steps:

1. Specify IPsec protocol encryption and authentication methods to use for security associations (SA) in this rule. Configuration of manual keys depends on your selections.
2. Click **OK**, and then configure the manual keys for this template.

Table 5-14 IPsec Protocols (Manual Keys) page

Item	Description
Encapsulation Type	<p>Specify how the selected IPsec protocols (ESP or AH) are encapsulated:</p> <ul style="list-style-type: none">• Transport (default): Only the user data in each IP packet is protected, the IP packet header is not protected.• Tunnel: All packet fields are protected, including the IP packet header.
Cryptographic Parameters	<p>Set the encryption method/strength and the authentication methods used:</p> <ul style="list-style-type: none">• ESP IPsec encapsulating security payload (ESP) protocol for IP packets. ESP headers are inserted in packets to ensure privacy and integrity of packet contents. Select among the supported encryption methods/strengths and authentication methods to be used for data protection.• AH IPsec authentication header (AH) protocol for IP packets. AH headers are inserted in packets to protect integrity of packet contents through cryptographic checksums. Select among the supported authentication methods. <p>CAUTION: IPsec AH might not function properly in environments that use network address translation (NAT).</p> <p>NOTE: For manual keys, you can select only one authentication method. You cannot use ESP authentication if AH is enabled. If you enable ESP and AH, you must select an AH authentication method.</p>

Manual Keys

Items on the **Manual Keys** page are described in the following table. Use this page to configure encryption keys and Security Associations (SA) manually. Because the applicable hosts are also manually configured, authentication and dynamic key generation are not needed.

Table 5-15 Manual Keys page

Item	Description
SPI Format	Use hexadecimal or decimal values to specify SPI values.
ESP SPI	<p>(ESP SPI fields are listed if ESP is enabled on the IPsec Protocols page.) A 32-bit field in an ESP header used to identify the IPsec security association (SA).</p> <p>In Value for an SA to use for packets received by the device.</p> <p>Out Value for an SA to use for packets sent by the device.</p>

Table 5-15 Manual Keys page (continued)

Item	Description
AH SPI	<p>(AH SPI fields are listed if AH is enabled on the IPsec Protocols page.) A 32-bit field in an authentication header used to identify the IPsec SA.</p> <p>In Value for an SA to use for packets received by the device.</p> <p>Out Value for an SA to use for packets sent by the device.</p> <p>CAUTION: IPsec AH might not function properly in environments that use network address translation (NAT).</p>
Key Format	Specify authentication entries using hexadecimal values or ASCII characters.
Encryption	<p>Specify encryption keys.</p> <p>In Encryption keys for packets received by the device.</p> <p>Out Encryption keys for packets sent by the device.</p>
Authentication	<p>Specify authentication keys. These must be the same for ESP and AH protocols if both are enabled.</p> <p>In Authentication keys for packets received by the device.</p> <p>Out Authentication keys for packets sent by the device.</p>

Rule Summary

This page provides summary information for the IPsec/Firewall rules created. To complete the procedure, use the following steps:

1. Click **Create Another Rule** to define another IPsec/Firewall rule before returning to the IPsec/Firewall Policy page.
2. Click **Finish** to add all the configured rules to the policy page.
3. Indicate whether to enable the IPsec/Firewall policy, and whether to enable the **Failsafe** feature.

Configure Windows systems

To configure IPsec on supported Windows systems, consult your system documentation, or search for IPsec on the Microsoft Web site.

6 Security features (V.40.xx)

The HP Jetdirect print server security features minimize unauthorized access to network parameters and other stored data. The features differ depending on the print server product and the firmware version, and are limited on value-featured print servers.

△ **CAUTION:** Although the basic HP Jetdirect security features can protect sensitive data, no method can fully prevent unauthorized access.

For advanced security needs, contact HP Consulting services.

A summary of the basic security features provided by HP Jetdirect print servers are listed in the following table.

Table 6-1 Summary of HP Jetdirect security features

Secure Embedded Web Server Management
<ul style="list-style-type: none">● Securely access the HP Embedded Web Server. A pre-installed, self-signed HP Jetdirect certificate provides HTTPS access to the HP Embedded Web Server from your Web browser.● Install a digital certificate issued by a trusted third party to configure the print server as a trusted site.● Configure security settings using the security configuration wizard.● Configure full-featured print servers with EAP/802.1X port-based authentication.
IPsec/Firewall
<ul style="list-style-type: none">● Control IP traffic using Firewall or IPsec policies. Use Firewall rules to allow or drop IP traffic based on IP addresses and services. Internet protocol security (IPsec) rules add the security benefits of authentication and encryption.
Network Protocol Control
<ul style="list-style-type: none">● Enable or disable network printing, printing services, device discovery, and management protocols on the HP Jetdirect print server. Prevent unauthorized access by disabling unused or unnecessary protocols.● Enable or disable protocols using Telnet (IPv4), the HP Embedded Web Server, or HP Web Jetadmin (IPv4).
IP Administrator Password
<ul style="list-style-type: none">● Restrict access to HP Jetdirect configuration parameters by setting the administrator password. The password is required by Telnet (IPv4), HP Web Jetadmin (IPv4), and the HP Embedded Web Server.● Use up to 16 alphanumeric characters.● Set the password using TFTP (IPv4), Telnet (IPv4), the HP Embedded Web Server services, or HP Web Jetadmin (IPv4).● Synchronize as the SNMP Set Community Name used in HP Web Jetadmin (IPv4) SNMP v1/v2c Set commands, if configured through the HP Embedded Web Server.● Cleared by cold reset of the print server to factory default settings.
IPv4 Access Control List

Table 6-1 Summary of HP Jetdirect security features (continued)

NOTE: The **Firewall** feature provides improved security and can be used in place of the IPv4 ACL.

- Specify up to 10 IPv4 host systems, or IPv4 networks of host systems, that are allowed access to the HP Jetdirect print server and the attached network device. (If the list is empty, then all hosts are allowed access.)
- Access is generally limited to host systems specified in the list.
- Host systems that use HTTP, such as the HP Embedded Web Server or IPP, are not checked against entries in the access list and are allowed access. However, you can disable HTTP host access using the HP Embedded Web Server.
- Configured on the HP Jetdirect print server using TFTP (IPv4), Telnet (IPv4), the HP Embedded Web Server, or SNMP (IPv4) management software.

Telnet Control

- Telnet (IPv4) access is not secure. You can disable Telnet using the HP Embedded Web Server (see [HP Embedded Web Server \(V.40.xx\) on page 64](#)).

Authentication and Encryption

Certificate management for X.509v3 digital certificates is provided through the HP Embedded Web Server, for both client-based and server-based authentication. A self-signed HP Jetdirect certificate is pre-installed, which can be replaced. On full-featured print servers, a CA certificate can also be installed.

IPv4/IPv6 SNMP v1/v2c Set Community Name (IP/IPX)

(SNMP v1/v2c only)

- A password on the HP Jetdirect print server that allows incoming SNMP Set commands to write (or set) HP Jetdirect configuration parameters.
- SNMP Set commands must contain the user-assigned community name, which is authenticated by the print server before the command is performed.
- On IP networks, you can restrict authentication of SNMP Set commands to systems on the ACL.
- Configured on the HP Jetdirect print server using TFTP (IPv4), Telnet (IPv4), the HP Embedded Web Server, or Management application services.
- SNMP v1/v2c uses plain text, which you can disable.

IPv4/IPv6 SNMP v3

(For full-featured print servers only)

- SNMP v3 agent on the HP Jetdirect print server provides secure, encrypted communications with an SNMP v3 management application, such as HP Web Jetadmin.
- Supports creation of an SNMP v3 account when it is enabled through the HP Embedded Web Server. The account information can be integrated on SNMP v3 management applications.
- Supports seamless SNMP v3 account creation and management from HP Web Jetadmin.

HP Web Jetadmin (IPv4) Password and Profiles

- Access control to HP Jetdirect configuration parameters through the HP Jetdirect IP administrator password, which you can configure from HP Web Jetadmin (IPv4), Telnet (IPv4), or the HP Embedded Web Server.
- HP Web Jetadmin provides access control through user profiles, which allow password protection for individual profiles and controlled access to HP Jetdirect and printer features.
- (For full-featured print servers only) You can use HP Web Jetadmin to enable the IPv4/IPv6 SNMP v3 agent on the print server, and create an SNMP v3 account for secure, encrypted management.

Table 6-1 Summary of HP Jetdirect security features (continued)

Printer Control Panel Lock
<ul style="list-style-type: none">Selected HP printers provide a control panel lock that prevents access to HP Jetdirect print server configuration parameters. In many cases, management applications (such as HP Web Jetadmin) can remotely set the lock. To determine whether your printer supports a control panel lock, see your printer documentation.
Configuration Precedence Table
<ul style="list-style-type: none">To control the configuration of various TCP/IP parameters using the different tools supported by the print server, a Configuration Methods precedence table is provided. Access the precedence table using the HP Embedded Web Server. By default, manual configuration methods have precedence over other methods (such as DHCP or TFTP). By changing the precedence order, the control of configuration parameters can be enhanced.

Limit access to security features

You can control access to HP Jetdirect configuration parameters using the available security features. Examples of various settings and associated levels of access control are provided in [Table 6-2 Settings for Access Control on page 123](#).

Table 6-2 Settings for Access Control

Settings	Level of Access Control
<ul style="list-style-type: none">Accessible using HTTP (HP Embedded Web Server), SNMP v1/v2c applications, or TelnetAdministrator password not setDefault SNMP v1/v2c community namesNo authentication or encryptionAccess control list empty or Firewall disabled.	<p>Low</p> <p>Best suited for trusted environments.</p> <p>Any system can access the HP Jetdirect configuration parameters through the HP Embedded Web Server, Telnet, or SNMP management software. Passwords are not required.</p>

Table 6-2 Settings for Access Control (continued)

Settings	Level of Access Control
<ul style="list-style-type: none">• Administrator password set• User-specified SNMP v1/v2 Set Community Name set• Access control list contains host entries and checks HTTP connections• Telnet and other non-secure protocols disabled.	<p>Medium</p> <p>Limited security for non-trusted environment.</p> <p>If the Administrator password and SNMP v1/v2c Set Community Name are known, access is limited to:</p> <ul style="list-style-type: none">• Systems listed in the access control list• SNMP v1/v2c management applications
<ul style="list-style-type: none">• Unused protocols disabled• HTTPS access enabled using certificates issued by trusted sources• Full-featured HP Jetdirect print servers configured for EAP/802.1X port-based authentication and encryption• Full-featured HP Jetdirect print servers with SNMP v3 enabled, SNMP v1/v2c disabled• Telnet disabled• Passwords set• Access control list contains specified entries and checks HTTP connections• Printer control panel locked• IPsec/Firewall policy is enabled and configured	<p>High</p> <p>High security for non-trusted, professionally managed environments.</p> <p>Access is controlled by IPsec. Encryption provides data privacy; network communication in plain text is not used.</p> <p>CAUTION: Configuration settings from a BootP/TFTP or DHCP/TFTP server can change when the print server is turned off and then on. Verify any settings that might change when the print server is turned off and then on.</p>

7 Troubleshoot the HP Jetdirect print server

This chapter describes how to diagnose and correct problems associated with the HP Jetdirect print server.

A flowchart guides you to the correct procedures for troubleshooting the following:

- Printer problems
- HP Jetdirect hardware installation and connection problems
- Network-related problems

To troubleshoot your HP Jetdirect print server, have the following items available:

- HP Jetdirect configuration page (see [HP Jetdirect configuration pages on page 135](#))
- Printer configuration or diagnostic page
- Documentation provided with your printer
- Documentation provided with your HP Jetdirect print server
- Diagnostics tools and utilities provided with your network software, such as Novell NetWare utilities, TCP/IP utilities, or network printer management applications, such as HP Web Jetadmin.

 **NOTE:** For frequently asked questions about installing and configuring HP Jetdirect print servers, search for your product at www.hp.com/support/net_printing.

Reset to factory defaults

Use the following procedures to reset parameters on the HP Jetdirect print server to factory default values.

△ **CAUTION:** A cold reset clears **all** data from memory and resets **all** values to their factory defaults. Before proceeding, print an HP Jetdirect configuration page.

An HP Jetdirect X.509v3 certificate is saved after a cold reset. However, a CA certificate installed to validate a network authentication server is not saved.

A reset can affect user-specified printer settings.

Network clients can lose their connection to the printer.

- **HP Jetdirect External Print Servers**
Hold down the **Test** button on the print server while connecting the power cord.
- **HP LaserJet Printer with Internal EIO Print Server**

Use the appropriate procedure to perform a cold reset on the printer/MFP model. (In most cases this resets the HP Jetdirect internal print server.)

- For older HP LaserJet printers, perform a cold reset by turning the printer off and then on again while pressing the **Go**, **Start**, or **Pause/Resume** button.
- For recent HP LaserJet printers and MFPs, you can generally use the procedures described in [Example: Cold reset using the service menu on page 126](#).
- For other printers, or if you have questions about performing a cold reset, see your printer service manuals. Or, visit www.hp.com/support and search for document file bpi02300.html.

- **HP LaserJet Printers/MFPs with Embedded HP Jetdirect Print Server**

HP Jetdirect embedded print servers can be reset to factory defaults when a cold reset is performed on the printer.

 **NOTE:** The **Restore Factory Settings** menu item in the printer control panel menu does **not** reset the HP Jetdirect print server.

- For recent LaserJet printers and MFPs, use the printer's Service menu accessed during the initial turn-on sequence. See [Example: Cold reset using the service menu on page 126](#).
- For other printers, see your printer service manuals.

Example: Cold reset using the service menu

To perform a cold reset on many recent HP LaserJet printers and MFPs, use the following steps:

1. Turn the printer on and watch for the memory count to begin.
2. Press and hold the **Select** ✓ button (or the 6 button on MFPs with numeric keypads) until the three control panel lights (**Ready**, **Data**, **Attention**) blink and then remain on.
3. Release the **Select** ✓ button (or 6 button). The control panel displays `Select Language`.
4. Press the down arrow ▼ button (or 9 button) until `Cold Reset` appears.
5. Press the **Select** ✓ button (or 6 button) to perform a cold reset and then continue its turn-on sequence.

Disable an HP Jetdirect embedded print server (V.40.xx)

 **NOTE:** You can disable HP Jetdirect EIO and external print servers by disconnecting them from the printer/MFP.

You can disable an HP Jetdirect embedded print server by using the printer/MFP Service menu. This can help you isolate faults to either the printer or the print server. To disable the print server, use the following steps:

1. Turn the printer on and watch for the memory count to begin.
2. Press and hold the **Select** ✓ button (or the 6 button on MFPs with numeric keypads) until the three control panel lights (**Ready**, **Data**, **Attention**) blink and then remain on.


3. Release the **Select** ✓ button (or 6 button). The control panel displays *Select*.
4. Press the down arrow ▼ button (or 9 button) until *Embedded LAN disable* appears.
5. Press the **Select** ✓ button (or 6 button) to disable the embedded print server and then continue its turn-on sequence.
6. Verify whether the printer/MFP properly completes its turn-on sequence.

To enable the embedded print server, use the same instructions except select *Embedded LAN enable* in step 4.

General troubleshooting

Troubleshooting chart - assess the problem

Figure 7-1 Assessing the Problem

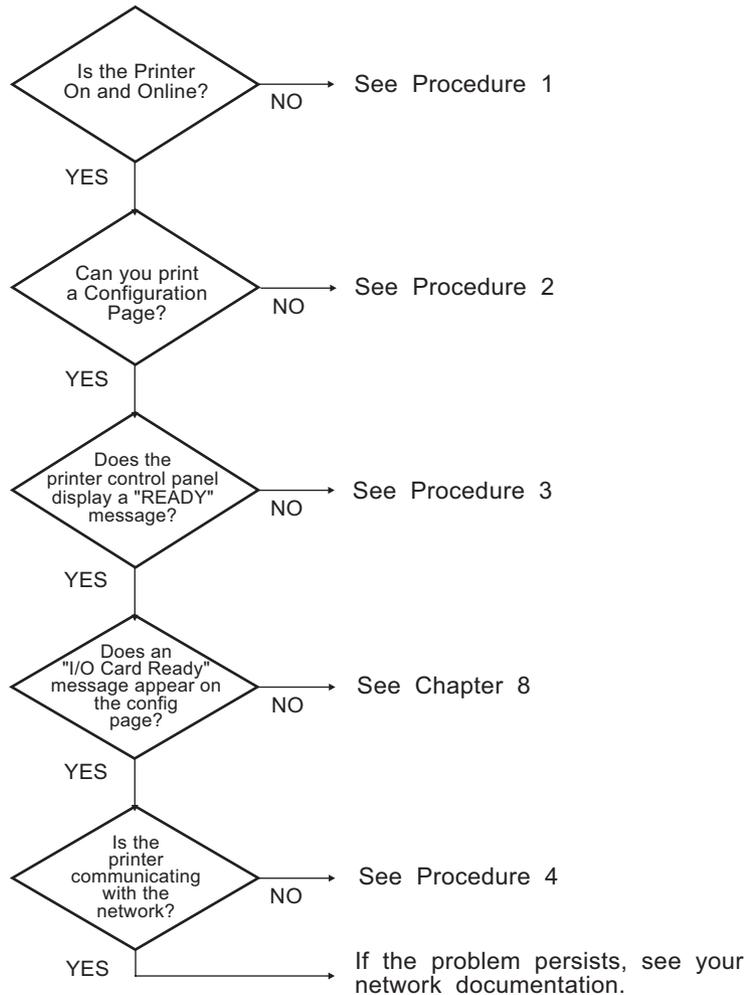

Procedure 1: Verify the printer is on and online

To verify that the printer is ready to print, check the following items:

1. Is the printer plugged in and turned on?

Make sure the printer is plugged in and turned on. If the problem persists, you might have a defective power cable, power source, or printer.

2. Is the printer online?

The online **Ready** light should be lit. If not, press the appropriate buttons (for example, **Start**, **Pause/Resume**, or press ✓ to access the menus) to place the printer online.

3. For printers with a display, is the printer's control panel display blank? If not, verify the following:

- Printer is turned on.
- HP Jetdirect print server is installed correctly.
- Printer is not in Power-Save mode.

4. Does a message other than **READY** appear on the printer control panel display?

- See Procedure 3 in this section for a list of network-related error messages and corrective actions.
- See your printer documentation for a complete list of control panel messages and corrective actions.

Procedure 2: Print an HP Jetdirect configuration page

The HP Jetdirect configuration page is an important troubleshooting tool. This page lists the status of your network and the HP Jetdirect print server. Also, the ability to print a configuration page provides an indication that the printer is operating correctly. See [HP Jetdirect configuration pages on page 135](#) for information on the HP Jetdirect configuration page.

 **NOTE:** For a TCP/IP network, you can view the configuration page from a Web browser by accessing the HP Embedded Web Server. See [HP Embedded Web Server \(V.40.xx\) on page 64](#) for more information.

If the configuration page does not print, check the following items:

1. Did you perform the correct steps on the printer to print the configuration page?

The steps to print a configuration page vary between different printers and print servers. (See the documentation supplied with your print server.) The following are general instructions.

For EIO and embedded print servers, an HP Jetdirect page typically prints along with the printer configuration page. Use the printer control panel menus.

For external print servers, press the **Test** button on the print server.

2. Is there a print job in process?

You cannot print an HP Jetdirect configuration page to the printer while a print job is in process. Wait until the print job is complete, then print the configuration page.

3. Does an error message appear on the printer control panel display?

- See Procedure 3 in this section for a list of network-related error messages and corrective actions.
- See your printer documentation for a complete list of control panel messages and corrective actions.

Procedure 3: Resolve printer display error messages

To resolve network-related error messages that appear on the printer control panel display, use the following steps: *This information assumes you have already printed a configuration page.*

1. For LaserJet printers or MFPs, are there Service Error messages, such as 49.XXXX, 79.XXXX or 8X.XXXX?

- See your printer manuals to interpret the error message.
- If you recently upgraded the HP Jetdirect firmware, turn the print server off and then on. For EIO and embedded HP Jetdirect print servers, turn the printer off and then on.
- Verify all connectors are fully mated.
- Print an HP Jetdirect configuration page and verify all configuration parameters. To interpret the configuration page messages, see [HP Jetdirect configuration pages on page 135](#).
- Disable the embedded HP Jetdirect print server operation, using the Service menu. If the error message disappears when the print server is disabled, it is likely that the print server or network is causing the error. Contact your service provider.
- Record all error codes and contact your service provider. If warranty service is required, include all diagnostic and configuration pages.

2. Does **EIOX INITIALIZING/DO NOT POWER OFF** appear on the display?

Wait for ten minutes to see if it clears. If not, you might need to contact your service provider.

3. Does a **49 ERROR** appear on the printer's control panel display?

The HP Jetdirect print server detected a break in the data communications. When this error occurs, the printer goes offline.

A break in communications can result from a disruption in the network connection or the server going down. If your printer has an Auto Continue feature that is disabled or off, press the appropriate key (**Start** or **Pause/Resume**, for example) on the printer after the communications problem is solved to place the printer back online. On some printers, turn on the **Auto Continue** feature to force the printer to reconnect without intervention. (This does not solve the disconnect problem.)

4. Does an initializing (for example, **INIT**) message appear on the display?

This is a normal message. Wait about 3 minutes for the message to clear, or another message to appear. If another message appears, see the printer's documentation and configuration pages for additional information.

5. Does a message other than **READY** or the messages listed in this section appear on the display?

See your printer documentation for a complete list of control panel messages and corrective actions.

Procedure 4: Resolve printer network communication problems

To verify that the printer is communicating with the network, use the following steps: (*This information assumes you have already printed an HP Jetdirect configuration page.*)

1. Are there any connection problems between the workstation or file server and the HP Jetdirect print server?

Verify network cabling, connections, and router configurations. Verify that network cable lengths meet network specifications.

For wireless print servers, verify that the wireless network parameters are set correctly.

2. Are your network cables connected properly?

Verify that the printer is attached to the network through the appropriate HP Jetdirect print server port and cable. Check each cable connection to make sure it is secure and in the right place. If the problem continues, try a different cable or network port on the hub or switch.

3. For 10/100/1000Base-T print servers, is auto-negotiation properly configured? For applicable HP Jetdirect print servers, auto-negotiation is configured through the HP Jetdirect menu, using the printer's control panel. Auto-negotiation is the factory default setting.

For proper operation, the link speed and communication mode on the print server must match the network.

Depending on the print server and printer/MFP device, indicator lights can identify the link speed used. If LEDs are used, verify that either the 10 Mbps, 100 Mbps, or 1000 Mbps link speed light is on. If all link indicators are off, then a proper link is not established.

The configuration page also contains the port configuration and auto-negotiation settings on the print server. Print and view the configuration page to verify proper settings.

4. If the print server is connected to an 802.1X network, is it properly configured for EAP/802.1X operation?

The network must support the EAP method configured for use on the print server.

Verify the configuration of the network's 802.1X port. If it does not allow guest or temporary access, you might need to pre-configure the HP Jetdirect print server for 802.1X operation before

connection to your network. Do this using an isolated LAN, or through a direct computer-to-printer connection using a cross-over cable.

- 5.** Have any software applications been added to the network?

Make sure the applications are compatible, installed correctly, and use the correct printer drivers.

- 6.** Can other users print?

The problem might be workstation-specific. Check the workstation network drivers, printer drivers, and redirection (capture in Novell NetWare).

- 7.** If other users can print, are they using the same network operating system?

Check your system for proper network operating system setup.

- 8.** Is your protocol enabled on the HP Jetdirect print server?

Check the status of the network protocols on the HP Jetdirect configuration page. See [HP Jetdirect configuration pages on page 135](#) for information on the configuration page. (On TCP/IP networks, you can also use the HP Embedded Web Server to check status of other protocols. See [HP Embedded Web Server \(V.40.xx\) on page 64](#))

- 9.** Is there an error message in the protocol's section on the HP Jetdirect configuration page?

See [HP Jetdirect configuration pages on page 135](#) for a list of error messages.

- 10.** If you are on a TCP/IP network, can you use Telnet to print directly to the printer?

To print directly, use the following Telnet command:

```
telnet <IP address> <port>
```

In the example, <IP address> is the IPv4 address assigned to the HP Jetdirect print server and <port> is 9100, the default printing port of the print server.

In the Telnet session, type in data and press **Enter**. The data should print to the printer (a manual form feed might be required).

- 11.** Does the printer appear in HP Web Jetadmin or other management application?

- Verify network and HP Jetdirect settings on the HP Jetdirect configuration page. See [HP Jetdirect configuration pages on page 135](#) for information on the configuration page.
- Confirm the network settings for the printer using the printer control panel (for printers with control panels).
- See the troubleshooting section in the online help included with the HP Web Jetadmin software.

- 12.** On supported systems, does the printer respond to HP Web Jetadmin?

- Verify network and HP Jetdirect settings on the configuration page. See [HP Jetdirect configuration pages on page 135](#) for information on the configuration page.
- Confirm the network settings for the printer using the printer control panel (for printers with control panels).
- See the troubleshooting section in the online help included with the HP Web Jetadmin software.

Troubleshooting wireless print servers

Unable to communicate during initial setup

If you use wireless communications to set up the print server, verify the following:

- Your wireless computer is configured to match the default wireless network settings on the HP Jetdirect print server:
 - Communication Mode: Ad Hoc
 - Network Name (SSID): hpsetup
 - Encryption (WEP): <Disabled>

 **NOTE:** The network name (SSID) is case-sensitive. Be sure to specify “hpsetup” using lowercase characters.

- The HP Jetdirect print server is turned on and operating properly (print the configuration page).
- You are within range of the HP Jetdirect print server.
- There are fewer than six devices total on the ad hoc network (with SSID “hpsetup”).
- There is no access point in the vicinity that is configured with an SSID of “hpsetup”.
- Multiple print servers are not being configured at the same time. If there are multiple print servers, turn all off except the one you want to configure.

Unable to communicate after initial setup

If you have successfully configured the HP Jetdirect wireless print server with a network connection to your network, but your network computers are unable to communicate with the printer (including a ping command), try the following:

- Print an HP Jetdirect configuration page and verify all configuration settings for your network. Common errors include incorrect entries for the following items:
 - Communication Mode (Ad Hoc or Infrastructure)
 - Network Name (SSID), which is case-sensitive
 - Authentication method
 - Encryption type, encryption key entries, or the specified transmit key
 - IP address
 - Basic service set identifier (BSSID), which distinguishes one wireless LAN from another even though they have the same SSID
- Verify that the printer is within range of the network. See [“Improving reception and performance on page 134”](#) in this chapter.
- Use a wireless PC and its utilities to confirm the signal strength at the printer's location. The detected signal strength should be similar for the print server, as indicated on the HP Jetdirect configuration page.

My configured channel does not match the configuration page

(Ad hoc mode only) The HP configuration tools allow you to select channel 10 or 11 (default) on the HP Jetdirect wireless print server. This channel is only used by the print server to broadcast its network name (SSID) when it fails to detect and join an existing wireless network. If it is able to join a network, it reconfigures its channel to the one used by the network.

The HP Jetdirect configuration page identifies the network channel actually being used on a network. It does not show the broadcast channel used when a network is not detected.

Improving reception and performance

Wireless LAN radio signals can penetrate many indoor structures and can reflect around obstacles. However, wireless communication range and performance depends on a variety of factors, including the number of users, the quality and physical placement of the wireless hardware, and the sources of radio signal interference. For example, microwave ovens and cordless telephones use similar frequencies that can interfere with wireless LAN signals. In general, the HP Jetdirect wireless print server's data transfer rates decrease with increasing distance, obstructions and interference.

Symptoms

- The signal strength is poor or marginal. See the HP Jetdirect configuration page or the HP Embedded Web Server.
- Print jobs are excessively slow.

Corrective actions

- Re-orient the printer or HP Jetdirect wireless print server. In general, having the print server pointed toward the access point or wireless PC improves reception and performance.
- Reduce or remove sources of interference. Metallic objects can absorb or attenuate radio signals, and devices such as microwave ovens and cordless phones operate using similar radio frequencies.
- Reduce the distance between the printer and the access point or wireless PC by doing any of the following:
 - moving the printer
 - moving the access point or wireless PC
 - adding an additional access point (Infrastructure mode only)
- Elevate the access point's antenna. In most office environments, elevating the access point's antenna improves the range and performance of all wireless devices.

Firmware download failure

As with other HP Jetdirect print servers, firmware upgrades can be downloaded using tools such as HP Download Manager (Windows), HP Web Jetadmin, or file transfer protocol (FTP).

If a firmware download failure occurs on an HP Jetdirect wireless print server, simply restart the download process and try again. If it is turned off and then on, the print server regains its previous configuration prior to the download failure.

8 HP Jetdirect configuration pages

The configuration pages are important tools for managing or troubleshooting HP Jetdirect print servers.

The standard configuration page provides identification information, such as the HP Jetdirect product, firmware version, and LAN hardware address, and status and configuration parameters of supported network protocols. Network statistics gathered by the print server are also provided. See [HP Jetdirect configuration page on page 135](#).

For printers with an HP Jetdirect embedded print server installed, an HP Jetdirect configuration page automatically prints after a printer configuration page prints. For instructions, see your printer manuals.

You can also view an HP Jetdirect configuration page over the network from a management utility, such as HP Web Jetadmin, or by accessing the HP Embedded Web Server on the HP Jetdirect print server. See [HP Embedded Web Server \(V.40.xx\) on page 64](#).

If supported by the print server, a Security configuration page provides IPsec status along with general security settings. The Security configuration page is printed from the HP Jetdirect menu accessed through the printer control panel. See [HP Jetdirect Security page on page 157](#).

You can print the HP Jetdirect configuration pages directly on the attached printer. The format of the pages depend on the following:

- Printer model
- HP Jetdirect product and firmware version

HP Jetdirect configuration page

The standard HP Jetdirect configuration page provides overall status and configuration settings on the print server.

Status field error messages

The HP Jetdirect configuration page contains several status fields for the print server and the supported protocols. One or more error codes and related error messages are displayed in a Status field. For information on each error message, see [Table 8-14 Error messages on page 150](#).

Configuration page format

A typical HP Jetdirect configuration page is shown in [Figure 8-1 Typical HP Jetdirect Configuration Page on page 136](#). The configuration page information provided depends on the print server model and firmware version.

Figure 8-1 Typical HP Jetdirect Configuration Page

```

----- General Information -----
Status: I/O Card Ready

Model Number: J8D07G
Hardware Address: 00110AFAAAEE
Firmware Version: sarch n
LAA: 00110AFAAAEE
Network Connection Type: Wired
Data Rate Detected: 100 Mb/s
Link Config: 100Tx-Full
Manufacturing ID: 38014729903801-W
Build Date: 02/22/2009 19:38:59

----- 802.11 Wireless -----
Status: Disabled

Communication Mode: Ad Hoc
Network Name (SSID): hpsetup
Signal Strength: Not Applicable
Access Point / BSSID: Not Applicable
Channel: 10
Encryption Type: Disabled

----- Security Settings -----
802.1X: Not Specified
IPsec: Disabled
Admin Password: Not Specified
Secure Web: HTTPS Required
Cert Expires: 2012-07-01 00:00 UTC
SNMP Versions: 1:2
SNMP Set Cmty Name: Not Specified
SNMP Get Cmty Name: Not Specified
Access List: Not Specified
Secure Web Configuration: Basic
Assessment: Enabled

----- Network Statistics -----
Total Packets Received: 437
Unicast Packets Received: 145
Bad Packets Received: 0
Total Packets Transmitted: 357

----- TCP/IP -----
IPv4: Enabled
IPv6: Enabled
Host Name: NP1FAAAEE
IPv4 Domain Name: asiapacific.hpqcorp.net
IPv6 Domain Name: Not Specified
Primary DNS Server: 16.110.135.51
Secondary DNS Server: 16.110.135.52
DNS(IPv6):
2000::ff
2000::fe
WINS Server: 16.230.57.248
Idle Timeout: 270 sec

----- IPv4 -----
Status: Ready

IP Address: 16.181.223.22
Subnet Mask: 255.255.252.0
Default Gateway: 16.181.220.1
Config By: Manual
BOOTP/DHCP Server: Not Specified
TFTP Server: Not Specified
Bonjour Service Name:
hp LaserJet 4200 [FAAAEE]

----- IPv6 -----
Status: Ready

Link-Local:
fe80::211:aff:fefa:aeee
Stateless:
Not Configured

DHCPv6:
2000::afe5:16fb:de0a:80c3
Manual:
Not Configured
  
```

The HP Jetdirect configuration page is divided into sections, as listed in the following table. Detailed parameter descriptions and settings for each section, including error messages, are provided in the remainder of this chapter.

Table 8-1 Configuration Page Sections

Section Name	Description
HP Jetdirect Configuration or General Information	Identifies the HP Jetdirect print server and general status. See Table 8-2 HP Jetdirect Configuration/General Information on page 137 . For error messages, see Table 8-14 Error messages on page 150 .

Table 8-1 Configuration Page Sections (continued)

Section Name	Description
802.11 Wireless	Provides current status of the wireless connection, and the current values of the wireless network parameters. See Table 8-4 802.11 Wireless settings on page 139 . Error messages are included in the table.
USB Printer Information	(HP Jetdirect external print servers only.) Status of the USB connection to the printer. See Table 8-3 USB Printer Information on page 139 . For error messages, see Table 8-14 Error messages on page 150 .
Security Settings	Status of the configuration and access security parameters. See Table 8-5 Security Settings on page 142 . You can also print an enhanced security page from the HP Jetdirect menu accessed through the printer control panel. See HP Jetdirect Security page on page 157 .
Network Statistics	(HP Jetdirect wired print servers only.) Current values for various network parameters monitored by the HP Jetdirect print server. See Table 8-6 Network Statistics on page 144 .
TCP/IP	Current status and parameter values for TCP/IP network protocols.
IPv4	For general information, see Table 8-7 TCP/IP configuration information on page 144 .
IPv6	For IPv4, see Table 8-8 IPv4 Section on page 145 . For IPv6, see Table 8-9 IPv6 Section on page 147 . (For error messages, see Table 8-14 Error messages on page 150 .)
IPX/SPX	Current status and parameter values for the IPX/SPX network protocols. See Table 8-10 IPX/SPX configuration information on page 148 . For error messages, see Table 8-14 Error messages on page 150 .
Novell/NetWare	Status and parameter values for a Novell NetWare network. See Table 8-11 Novell/NetWare configuration information on page 148 . For error messages, see Table 8-14 Error messages on page 150 .
AppleTalk	(Ethernet Only) Status and parameter values for the AppleTalk network protocols. See Table 8-12 AppleTalk configuration information on page 149 . For error messages, see Table 8-14 Error messages on page 150 .
DLC/LLC	Status and parameter values for the DLC/LLC network protocols. See Table 8-13 DLC/LLC configuration information on page 150 . For error messages, see Table 8-14 Error messages on page 150 .

Configuration page messages

HP Jetdirect Configuration/General Information

The following table provides general HP Jetdirect print server configuration information. For error messages, see [Table 8-14 Error messages on page 150](#).

Table 8-2 HP Jetdirect Configuration/General Information

Message	Description
NETWORK CONNECTION TYPE	Specifies the type of network connection: Wireless or Wired.

Table 8-2 HP Jetdirect Configuration/General Information (continued)

Message	Description
STATUS	<p>Current state of the HP Jetdirect print server.</p> <p>I/O CARD READY, or READY Successfully connected to the network and is awaiting data.</p> <p>I/O CARD INITIALIZING, or INITIALIZING Initializing the network protocols. For more information, see the status line for each protocol on the configuration page.</p> <p>I/O CARD NOT READY, or ERROR Problem detected with the print server or its configuration.</p> <p>An error code and message is displayed if the print server is not ready. For more information, see Table 8-14 Error messages on page 150.</p>
DATA RATE DETECTED	<p>Specifies the network data rate depending on the type of network connection:</p> <p>1–54 Mbps (Wireless 802.11g)</p> <p>10 Mbs, 100 Mbps, 1000 Mbps (Wired Ethernet)</p>
MODEL NUMBER	Product number of the HP Jetdirect print server (for example, J7961G)
LINK CONFIG	<p>Specifies the active link communication mode:</p> <p>802.11: Wireless 802.11g</p> <p>10T HALF: 10 Mbps, half-duplex (wired port)</p> <p>10T FULL: 10 Mbps, full-duplex (wired port)</p> <p>100TX HALF: 100Mbps, half-duplex (wired port)</p> <p>100TX FULL: 100Mbps, full-duplex (wired port)</p>
HARDWARE ADDRESS	The 12-digit hexadecimal network hardware (MAC) address of the HP Jetdirect print server installed in the printer or device. This address is assigned by the manufacturer.
PORT SELECT	<p>(Ethernet only) Specifies the port detected for use on the HP Jetdirect print server:</p> <p>NONE: The print server is not connected to the network.</p> <p>RJ-45: The RJ-45 network port is connected.</p>
FIRMWARE VERSION	Firmware revision number of the HP Jetdirect print server currently installed in the printer.
LAA	Locally administered address (LAA) identifies the specified LAN hardware address of a print server, which is required by some network administrators. The default address is the print server's factory-default LAN hardware address.
MANUFACTURING ID	Manufacturing identification code for use by HP online support personnel.
S/N	HP Jetdirect serial number.
DATE MANUFACTURED	Manufacture date of the HP Jetdirect print server.

USB printer information

Information in this section applies to HP Jetdirect external print servers with USB printer connections only. USB information on the HP Jetdirect configuration page is described in the following table. For non-HP devices, some information might not be available.

Table 8-3 USB Printer Information

Message	Description
Device Name	Name of the attached USB printing device, supplied by the manufacturer.
Manufacturer	Manufacturer of the attached printing device.
Serial Number	Manufacturer's serial number for the attached printing device.
Communication Mode	<p>Current USB communication mode:</p> <ul style="list-style-type: none"> • Composite USB Multiple interface (Composite USB) allows simultaneous print, scan, and status communications. • IEEE 1284.4 IEEE standard protocol for printers and multi-function (All-in-One) devices that allows multiple channels of simultaneous print, scan, and status communication. • MLC Multiple logical channels (HP proprietary) for printers and multi-function (All-in-One) devices that allows multiple channels of simultaneous print, scan, and status communication. • Bidirectional Two-way printer communication, sending print data to the printing device and returning status information from the printing device. • Unidirectional One-way communication to the printing device. • Device not found No connection detected. Check device and cable. • Device not supported Connected device is not a printer (for example, a camera).
USB SPEED	<p>(USB 2.0 print servers only.) Auto-negotiated communication speed over the USB connection between the print server and the device.</p> <p>Full Speed 12 Mbits/sec as specified in the USB v2.0 specifications, compatible with USB v1.1 specifications.</p> <p>Hi-Speed 480 Mbits/sec for USB v2.0 devices only.</p> <p>Disconnected USB port not connected.</p>

802.11 Wireless settings

Wireless status, configuration parameters and error messages are listed in [Table 8-4 802.11 Wireless settings on page 139](#).

Table 8-4 802.11 Wireless settings

Message	Description
Status	Current state of the HP Jetdirect print server. See Table 8-2 HP Jetdirect Configuration/General Information on page 137 for a complete definition.
Model Number	Product number of the HP Jetdirect print server.
Hardware Address	The 12-digit hexadecimal network hardware (MAC) address of the HP Jetdirect print server installed in the printer or device. This address is assigned by the manufacturer.
Firmware Version	Firmware revision number of the HP Jetdirect print server currently installed in the printer.
Network Connection Mode	The type of network connection: Auto, Wireless, or Wired.

Table 8-4 802.11 Wireless settings (continued)

Message	Description
Status	<p>Current 802.11 wireless configuration status.</p> <p>Ready: A wireless connection to the network is established.</p> <ul style="list-style-type: none">Infrastructure Mode: Associated with an access point and authenticated on the network.Ad Hoc Mode: Wireless communications established directly with other network devices (access points are not used in this mode). <p>Initializing: The print server is booting up, performing self-tests, and verifying internal communications.</p> <p>Scanning: The print server is scanning for the specified network. The following status or error messages can display:</p> <ul style="list-style-type: none">Infrastructure Mode: The print server is scanning on all channels for a network (access point) with the specified SSID.Ad Hoc Mode: The print server is scanning on all channels for a network with the specified SSID, or has created a workgroup to which no one has joined. <p>Error: A wireless connection error has occurred that prevents association or authentication with an access point (infrastructure mode), or prevents a connection to an ad hoc network. The following status or error messages can display.</p> <p>Status/Error Messages</p> <ul style="list-style-type: none">NO SIGNAL DETECTED: (Infrastructure Mode only) The print server did not find an access point and did not detect a radio signal.SCANNING FOR SSID: The print server is scanning on all channels for devices on the specified SSID. Check your specified SSID, or check the status of the access point (Infrastructure mode) or other wireless devices. <p>The print server continues to scan for the specified SSID.</p> <ul style="list-style-type: none">AUTHENTICATION IN PROGRESS: Link-level authentication is in progress. In Infrastructure mode, server-based authentication might also be in progress.AUTHENTICATION FAILED. The HP Jetdirect print server cannot access the network because of an authentication error. The error depends on the authentication method used. Verify the authentication method using the "Authentication Type" field.ENCRYPTION REQUIRED: Encryption is required on this network, but encryption is not enabled on the HP Jetdirect print server. Verify encryption configuration.
Communication Mode	<p>Wireless network topology configured on the HP Jetdirect print server:</p> <p>Infrastructure: Wireless connection to an access point (gateway, bridge, base station) that receives and forwards network traffic between all network nodes.</p> <p>Ad Hoc: A direct wireless peer-to-peer connection to all network nodes, without routing through an access point.</p>
Network Name (SSID)	<p>Name of the network (service set identifier) to which the print server is connected.</p>

Table 8-4 802.11 Wireless settings (continued)

Message	Description
Signal Strength (1–5)	<p>Strength of the radio signal received by the print server:</p> <p>Level 1 (Poor)</p> <p>Levels 2 and 3 (Marginal)</p> <p>Level 4 (Good)</p> <p>Level 5 (Excellent)</p> <p>No Signal: Level 0 (No radio signal detected on any channel)</p> <p><blank>: No radio signal detected while the print server is scanning.</p> <p>Not Applicable: Signal strength is not applicable when the print server is in ad hoc mode.</p>
Network Connection Type	<p>Specifies the type of network connection: Wireless or Wired.</p>
Access Point / BSSID	<p>Basic service set identifier (BSSID) is a 6-byte number that distinguishes one wireless LAN (WLAN) from another, even if they have the same network name (SSID).</p> <p>Infrastructure Mode: The MAC address or name of the access point to which the HP Jetdirect wireless print server is connected.</p> <p>Ad Hoc Mode: A random number or name generated by the initiator of the ad hoc network.</p>
Channel	<p>Radio frequency channel that the print server sensed and configured for communication on the network. Because it was automatically sensed from the network, this channel can be different than the user-configured channel, which is only used for broadcasts if the specified network/SSID is not found.</p> <p>Channel number values 1 through 14 might display. The allowed channels are country/region-dependent.</p>
Authentication Type	<p>Level of encryption configured on the HP Jetdirect print server.</p> <p>No Security (Open System): Positive validation of a device's identification is not required for network access unless the network requires EAP authentication. An authentication failure can indicate that an EAP authentication server has rejected network access.</p> <p>WEP: Each device on the network is configured with a shared secret WEP key which is required to gain access to the network. Authentication failures for the HP Jetdirect print server can arise if the installed key is faulty, or the wrong key is active, when multiple keys are configured and stored on the print server.</p> <p>WPA: For enhanced security, Wi-Fi protected access using a pre-shared key is configured. The pre-shared key is generated by the print server through a user-specified network passphrase configured on the print server.</p>
User Name	<p>User identity.</p>
CA Server ID	<p>ID of the CA server.</p>
SSL Certificate	<p>Indicates whether the SSL certificate is Installed or Not Installed.</p>
SSL Version	<p>Version of the installed SSL protocol.</p>
SSL Issuer	<p>Entity issuing the CA certificate.</p>

Table 8-4 802.11 Wireless settings (continued)

Message	Description
SSL Subject	Subject from the CA certificate.
SSL Start Date	Date the SSL certificate is valid.
Encryption Type	Indicates the type. 64-bit WEP, 128-bit WEP, Dynamic (used with WEP, TKIP, or both), Auto, or None (no encryption is used)..
Dynamic Type	Indicates whether dynamic encryption is used. Disabled, Shared (pre-shared keys), or Robust (TKIP or AES)
Available Wireless Networks	Lists the available wireless networks, and their properties which include the SSID, Channel, Strength, Capability, Security, and BSSID.

Security Settings

Information in this section of the HP Jetdirect configuration page is described in the following table.

Table 8-5 Security Settings

Message	Description
802.1X	Indicates which EAP/802.1X client authentication setting was selected. EAP-TLS Use EAP-TLS. EAP-PEAP Use EAP-PEAP. Specified An 802.1X authentication protocol other than EAP-TLS/EAP-PEAP was selected. Not Specified No 802.1X authentication was selected.
IPsec or Firewall	If the print server and printer/MFP device supports IPsec, then IPsec appears. If IPsec is not supported, then Firewall appears. Current IPsec/Firewall status. Enabled IPsec/Firewall is enabled and operating as configured. Disabled IPsec/Firewall is turned off. Policy Failed Print server failed to implement the selected IPsec policy. You might need to reset security (control panel or the HP Embedded Web Server), or perform a cold reset.
Admin Password	IP Administrator password is set on the print server. This password is shared by Telnet, the HP Embedded Web Server, and HP Web Jetadmin to control access to print server configuration parameters. (Consists of up to 16 alphanumeric characters.) Not Specified Password not set. Set Password is set. Clear the password, using a cold reset.
Cert Expires	Expiration date of the digital certificate for SSL/TLS encrypted security. The date is in UTC format (for example, "2012-10-02 12:45 UTC"). Not Applicable Digital certificate is not installed.

Table 8-5 Security Settings (continued)

Message	Description
SNMP Versions	<p>SNMP versions enabled on the print server.</p> <p>Disabled All SNMP versions disabled. No SNMP access is allowed.</p> <p>1;2 SNMP v.1 and SNMP v.2c supported. SNMP v.3 is disabled, or not supported.</p> <p>1;2;3-na/np SNMP v.1, v.2c, and v.3 enabled. v.3 is enabled with the minimum security of no authentication (na) and no privacy (np).</p> <p>1;2;3-a/np SNMP v.1, v.2c, and v.3 enabled. v.3 is enabled with the minimum security of authentication enabled (a) but no privacy (np).</p> <p>1;2;3-a/p SNMP v.1, v.2c, and v.3 enabled. v.3 is enabled with the minimum security of authentication (a) with privacy (p) enabled.</p> <p>3-na/np SNMP v.1 and v.2c disabled. SNMP v.3 is enabled with the minimum security of no authentication (na) and no privacy (np).</p> <p>3-a/np SNMP v.1 and v.2c disabled. SNMP v.3 is enabled with the minimum security of authentication enabled (a) but no privacy (np).</p> <p>3-a/p SNMP v.1 and v.2c disabled. SNMP v.3 is enabled with the minimum security of authentication (a) with privacy (p) enabled.</p>
SNMP Set Cmty Name	<p>SNMP set community name is configured on the HP Jetdirect print server. An SNMP set community name is a password for write access to SNMP control functions (SNMP SetRequests) on the HP Jetdirect print server.</p> <p>Not Specified SNMP set community name is not set.</p> <p>Specified User-specified SNMP set community is set.</p>
SNMP Get Cmty Name	<p>SNMP get community name is configured on the HP Jetdirect print server. This is a password to determine which SNMP GetRequests the HP Jetdirect print server responds to. If a Get community name is set, the print server responds to either a user specified community name or the factory-default.</p>
Access List	<p>(IPv4 only) Access control list is set on the HP Jetdirect print server. The list specifies the IP address of individual systems, or IP network of systems, that are allowed access to the print server and device.</p> <p>Specified Host access list is set.</p> <p>Not Specified Host access list is not set. All systems are allowed access.</p>
Secure Web Configuration	<p>Use encrypted communications between a browser and the HP Embedded Web Server.</p> <p>Optional (HTTPS/HTTP) Allows un-encrypted communication using standard HTTP ports, as well as encrypted communications using HTTPS.</p> <p>HTTPS Required Allow only encrypted communications on HTTPS.</p>
Assessment	<p>When enabled (the default), print servers attempting connection to network resources must be in full compliance with corporate governance policy.</p>
Assessment State	<p>Indicates whether assessment is Enabled or Disabled.</p>
DHCP Enforcement	<p>Use DHCP as the transport method for moving assessment data.</p>
802.1X Enforcement	<p>Use 802.1X to transport assessment data.</p>
Policy Changes Poll Interval	<p>Number of days to wait before checking the assessment server for changes.</p>

Table 8-5 Security Settings (continued)

Message	Description
JD Config Changes Poll Interval	Number of hours to wait before checking the assessment server for device configuration changes.
Primary Address/Host Name	IP address or host name of the primary assessment server.
Primary Port	Port number of the primary assessment server.
Backup Address/Host Name	IP address or host name of the backup assessment server.
Backup Port	Port number of the backup assessment server.

Network Statistics

Information in this section of the HP Jetdirect configuration page is described in [Table 8-6 Network Statistics on page 144](#).

Table 8-6 Network Statistics

Message	Description
TOTAL PACKETS RECEIVED	Total number of frames (packets) received by the HP Jetdirect print server without error. Includes broadcast, multicast packets, and packets specifically addressed to the print server. Does not include packets specifically addressed to other nodes.
UNICAST PACKETS RECEIVED	Number of frames specifically addressed to this HP Jetdirect print server. Does not include broadcasts or multicasts.
BAD PACKETS RECEIVED	Total number of frames (packets) received with errors by the HP Jetdirect print server.
TOTAL PACKETS TRANSMITTED	Total number of frames (packets) transmitted without error.

TCP/IP protocol information

Information in this section of the HP Jetdirect configuration page is described in the following table. For general TCP/IP configuration parameters, see [Table 8-7 TCP/IP configuration information on page 144](#). For IPv4 parameters, see [Table 8-8 IPv4 Section on page 145](#). For IPv6 parameters, see [Table 8-9 IPv6 Section on page 147](#). For error messages, see [Table 8-14 Error messages on page 150](#).

Table 8-7 TCP/IP configuration information

Message	Description
IPv4 and IPv6	Status of IPv4 and IPv6 protocols on the print server: Enabled Protocol is active. Disabled Protocol is inactive.
HOST NAME	Host name configured on the print server. It might be truncated. Not Specified Host name not specified in a BOOTP response or TFTP configuration file. NPIxxxxxx Default name is NPIxxxxxx, where xxxxxx represents the last six digits of the LAN hardware (MAC) address.

Table 8-7 TCP/IP configuration information (continued)

Message	Description
IPV4 DOMAIN NAME	DNS name of the IPv4 domain in which the HP Jetdirect print server resides (for example, support.company.com). This is not the fully qualified DNS name (for example, printer1.support.company.com) because the host printer name is not included. Not Specified Domain name not configured on the print server.
IPV6 DOMAIN NAME	DNS name of the IPv6 domain in which the HP Jetdirect print server resides (for example, support.company.com). This is not the fully qualified DNS name (for example, printer1.support.company.com) because the host printer name is not included. Not Specified Domain name not configured on the print server.
PRIMARY DNS SERVER	IPv4 address of the DNS server. Not Specified Primary DNS server not configured on the print server.
SECONDARY DNS SERVER	IPv4 address of the DNS server. Not Specified Secondary DNS server not configured on the print server.
DNS (IPV6)	IPv6 address of one or more DNS servers. Not Specified IPv6 DNS server not configured on the print server.
WINS SERVER	IP address of the WINS server. Not Specified WINS server's IP address not detected or configured.
IDLE TIMEOUT	Timeout value expressed in seconds after which the print server closes an idle TCP print data connection. Values are integers between 0 and 3600. A value of zero turns off the timeout mechanism. The default value is 270 seconds.

IPv4 section

Items displayed under the IPv4 section of the configuration page are discussed in the following table.

Table 8-8 IPv4 Section

Message	Description
STATUS	Current TCP/IPv4 status. READY Print server is awaiting data over TCP/IP. DISABLED TCP/IP is manually disabled. INITIALIZING Print server is searching for the BOOTP server, or trying to get the configuration file through TFTP. An additional status message can also be displayed. An error code and message is displayed if the print server is not ready. For more information, see Table 8-14 Error messages on page 150 .
IP ADDRESS	IPv4 address assigned to the HP Jetdirect print server. This is a required entry for operation of the print server on a TCP/IP network. During initialization, a temporary value 0.0.0.0 is displayed. After two minutes, a default IP address 169.254/16 or 192.0.0.192 is assigned. Not Specified IP address is not assigned or the value is zero.

Table 8-8 IPv4 Section (continued)

Message	Description
SUBNET MASK	IPv4 subnet mask configured on the HP Jetdirect print server. During initialization, a temporary value 0.0.0.0 is displayed. Depending on configuration parameters, the print server can automatically assign a usable default value. Not Specified Subnet mask is not configured.
DEFAULT GATEWAY	IPv4 address of the gateway used when sending packets off the local network. Only one default gateway can be configured. During initialization, a temporary value 0.0.0.0 is displayed. If not provided, the IP address of the HP Jetdirect print server is used. Not Specified Default gateway is not configured.
CONFIG BY:	Indicates how the HP Jetdirect print server obtained its IPv4 configuration: BOOTP Automatic configuration through a BOOTP server. BOOTP/TFTP Automatic configuration through a BOOTP server and TFTP configuration file. DHCP Automatic configuration through a DHCP server. DHCP/TFTP Automatic configuration through a DHCP server and TFTP configuration file. RARP Automatic configuration through the RARP. USER SPECIFIED Manual configuration through Telnet, the printer's control panel, HP Web Jetadmin, HP Embedded Web Server, or other method. DEFAULT IP Default IP address was assigned. This address might not be a valid address for your network. AUTO IP Link-local IP address (169.254.x.x) was assigned. If the network is a link-local network, this address should be valid. NOT CONFIGURED Not configured with IP parameters. Verify that TCP/IP is enabled, or check for error status.
BOOTP SERVER or DHCP SERVER or RARP SERVER	Displayed if BOOTP, DHCP, or RARP is used for TCP/IP configuration. Specifies the IP address of the system that responds to the HP Jetdirect print server's request for automatic TCP/IP configuration over the network. Not Specified Configuration server's IP address could not be determined or was set to zero in the response packet.
BOOTP/DHCP SERVER	Displayed during initialization while the HP Jetdirect print server attempts to obtain its TCP/IP configuration from a BOOTP or DHCP server. The temporary address displayed is 0.0.0.0.
TFTP SERVER	IP address of the system where the TFTP configuration file is located. During initialization, the temporary address 0.0.0.0 is displayed. Not Specified TFTP server is not set.

Table 8-8 IPv4 Section (continued)

Message	Description
WEB JETADMIN URL	If the HP Jetdirect print server is found on the network by HP Web Jetadmin, the URL of the host system used for HP Web Jetadmin services is displayed. The URL is limited to two lines and can be truncated. Not Specified HP Web Jetadmin host system URL could not be identified or is not set.
BONJOUR SERVICE NAME	Name assigned to this device or service. This name is persistent and is used to resolve a particular device or service if socket information (such as the IP address) changes from session to session. Apple Bonjour displays this service. The default service name is the printer model and the LAN hardware (MAC) address.

IPv6 section

The following table includes items displayed under the IPv6 section of the configuration page.

Table 8-9 IPv6 Section

Message	Description
STATUS	Current TCP/IPv6 status. READY Print server is awaiting data. DISABLED Manually disabled. INITIALIZING Searching for the BOOTP server, or trying to get the configuration file through TFTP. Additional status message might be displayed. An error code and message is displayed if the print server is not ready. For more information, see Table 8-14 Error messages on page 150 .
LINK-LOCAL	IPv6 link local address configured on the print server. Not Configured Address is not set.
STATELESS	IPv6 stateless addresses configured on the print server. Not Configured Address is not set.
DHCPV6	IPv6 stateful address configured by a DHCPv6 server. Not Configured Address is not set.
MANUAL	IPv6 address manually configured on the print server, using the printer control panel or the HP Embedded Web Server. Not Configured Address is not set.

IPX/SPX protocol information

Information in this section of the HP Jetdirect configuration page is described in [Table 8-10 IPX/SPX configuration information on page 148](#). For error messages, see [Table 8-14 Error messages on page 150](#).

Table 8-10 IPX/SPX configuration information

Message	Description
STATUS	<p>Current IPX/SPX protocol status.</p> <p>READY Print server is awaiting data.</p> <p>DISABLED Manually disabled.</p> <p>INITIALIZING Registering the node address or name. An additional status message might also displayed.</p> <p>An error code and message is displayed if the print server is not ready. For more information, see Table 8-14 Error messages on page 150.</p>
PRIMARY FRAME TYPE	<p>Frame type selection.</p> <p>AUTO SELECT Automatically sense and limit to the first one detected.</p> <p>EN_8023 Limit to IPX over IEEE 802.3 frames. All others are counted and discarded.</p> <p>EN_II Limit to IPX over Ethernet frames. All others are counted and discarded.</p> <p>EN_8022 Limit to IPX over IEEE 802.2 with IEEE 802.3 frames. All others are counted and discarded.</p> <p>EN_SNAP Limit to IPX over SNAP with IEEE 802.3 frames. All others are counted and discarded.</p>
NETWORK FRAME TYPE RCVD	<p>Network column specifies the network number associated with a protocol frame type used for communication between a server and the HP Jetdirect print server.</p> <p>UNKNOWN Determining which network number to use.</p> <p>Frame Type column identifies the frame type used with the associated network number: EN_8023, EN_8022, EN_II, EN_SNAP. Unless a specific frame type is manually set, the print server automatically determines the protocol frame type by listening to the network data. DISABLED Frame type for that network is manually configured.</p> <p>RCVD column displays the packets received for each frame type.</p>

Novell/NetWare parameters

Information in this section of the HP Jetdirect configuration page is described in [Table 8-11 Novell/NetWare configuration information on page 148](#). For error messages, see [Table 8-14 Error messages on page 150](#).

Table 8-11 Novell/NetWare configuration information

Message	Description
STATUS	<p>Current Novell NetWare configuration status.</p> <p>READY Print server is awaiting data.</p> <p>DISABLED Manually disabled.</p> <p>INITIALIZING Registering the node address or name. Additional status messages might be displayed.</p> <p>An error code and message is displayed if the print server is not ready. For more information, see Table 8-14 Error messages on page 150.</p>

Table 8-11 Novell/NetWare configuration information (continued)

Message	Description
NODE NAME	<p>Queue Server Mode Print server name, which must match a valid print server on the appropriate NetWare file server. The default name is NPIXXXXXX, where XXXXXX is the last six digits of the LAN hardware (MAC) address.</p> <p>Remote Printer Mode Network printer name. The default name is NPIXXXXXX.</p>
NETWARE MODE	<p>Mode used by the HP Jetdirect print server.</p> <p>QUEUE SERVER Receives data directly from the queue.</p> <p>REMOTE PRINTER Print server emulates a Novell NetWare remote printer. (The printer number normally follows this parameter.)</p> <p>If the printer is not configured, this field displays QUEUE SERVER.</p>
NDS TREE NAME	<p>Name of the Novell Directory Services (NDS) tree for this printer. NDS is a database of objects on a NetWare network organized in a hierarchical tree structure.</p> <p>Not Specified (or blank) NDS is disabled.</p>
NDS CONTEXT	<p>Fully qualified NDS name where the HP Jetdirect print server object resides in the NDS tree. For example:</p> <p>CN=lj_pserver.OU=support.OU=mycity.OU=mycompany</p> <p>Not Specified (or blank) NDS is disabled.</p>
ATTACHED SERVER	<p>HP Jetdirect discovery method [NSQ] (Nearest Service Query) or [GSQ] (General Service Query) and the name of the proxy file server used to locate the configured bindery servers.</p> <p>Not Specified (or blank) A NetWare server is not configured.</p>
SAP INTERVAL	<p>Time interval in seconds that the print server waits between SAP broadcasts on the network. The default is 60 seconds.</p>

AppleTalk protocol information

Information in this section of the HP Jetdirect configuration page (Ethernet only) is described in [Table 8-12 AppleTalk configuration information on page 149](#). For error messages, see [Table 8-14 Error messages on page 150](#).

Table 8-12 AppleTalk configuration information

Message	Description
STATUS	<p>Current AppleTalk configuration status.</p> <p>READY Print server is awaiting data.</p> <p>DISABLED Manually disabled.</p> <p>INITIALIZING Registering the node address or name. Additional status messages might be displayed.</p> <p>An error code and message is displayed if the print server is not ready. For more information, see Table 8-14 Error messages on page 150.</p>

Table 8-12 AppleTalk configuration information (continued)

Message	Description
NAME	Printer name on the AppleTalk network. A number after the name signifies this is the Nth instance of this name.
ZONE	Name of the AppleTalk network zone on which the printer is located.
TYPE	Printer type advertised on the network. Two types can display.
NETWORK NUMBER	NETWORK NUMBER Network number on which the HP Jetdirect print server is currently operating.
NODE NUMBER	NODE NUMBER Node number that the print server chose for itself as part of its initialization sequence. NOTE: The AppleTalk phase 2 (P2) parameter is pre-configured on the HP Jetdirect print server.

DLC/LLC protocol information

Information in this section of the HP Jetdirect configuration page is described in [Table 8-13 DLC/LLC configuration information on page 150](#).

Table 8-13 DLC/LLC configuration information

Message	Description
STATUS:	Current DLC/LLC protocol status. READY Print server is awaiting data. DISABLED Manually disabled. INITIALIZING Registering the node address or name. Additional status messages might display. An error code and message is displayed if the print server is not ready. For more information, see Table 8-14 Error messages on page 150 .

Error messages

Error codes and messages that might appear in the Status sections of the HP Jetdirect configuration page are described in [Table 8-14 Error messages on page 150](#).

Table 8-14 Error messages

Error Code and Message	Description
02 LAN ERROR - INTERNAL LOOPBACK	During self-test, an internal loopback test error was detected. The print server might be faulty. If the error persists, replace the HP Jetdirect print server.
03 LAN ERROR - EXTERNAL LOOPBACK	Print server is incorrectly connected to your network or is defective. Make sure it is correctly attached to your network by checking the cabling and connectors.

Table 8-14 Error messages (continued)

Error Code and Message	Description
05 NO SIGNAL DETECTED	(802.11 Wireless, Infrastructure Mode only) The print server did not find an access point and did not detect a radio signal. Check for sources of radio signal interference. If possible, elevate the print server or the external antenna (if applicable). Verify other wireless devices are turned on and located in wireless signal range of the print server.
06 ENCRYPTION REQUIRED	Encryption is required on this network, but the encryption settings are incorrect. Check the encryption settings.
07 LAN ERROR - CONTROLLER CHIP	Check the network connections. If they are intact, run the self-test by turning the printer off, and then on again. If the error persists, replace the HP Jetdirect print server.
07 AUTHENTICATION FAILED	Print server could not access the network because of an authentication error. The error depends on the authentication method used. Verify the authentication method and settings.
08 LAN ERROR - INFINITE DEFERRAL	Network congestion problem.
08 AUTHENTICATION IN PROGRESS	Link-level authentication is in progress.
09 SCANNING FOR SSID	(802.11 Wireless) The print server is scanning on all channels for devices on the specified SSID (network name). Check your specified SSID, or check status of the access point (Infrastructure mode) or other wireless devices. The print server continues to scan for the specified SSID.
09 LAN ERROR - BABBLE	Check the network connections. If the connections are intact, run the self-test by turning the printer off, and then on again. If the error persists, replace the print server.
0A LAN ERROR - NO SQE	(Ethernet) Check the network connections. If the connections are intact, run the self-test by turning the print server off, and then on again. If the error persists, replace the print server.
0C LAN ERROR - RECEIVER OFF	Check the cabling and connectors on your Ethernet network. If you cannot find a problem with your network cabling, run the self-test by turning the printer off, and then on again. If the error persists, there might be a problem with the HP Jetdirect print server.
0D LAN ERROR - TRANSMITTER OFF	Check the cabling and connectors on your Ethernet network. If you cannot find a problem with your network cabling, run the self-test by turning the printer off, and then on again. If the error persists, there might be a problem with the HP Jetdirect print server.
0E LAN ERROR - LOSS OF CARRIER	Check the network connections. If the connections are intact, run the self-test: turn the printer off, and then on again. If the error persists, replace the HP Jetdirect print server.
10 LAN ERROR - UNDERFLOW	(Ethernet) Check the cabling and connectors on your network. If you cannot find a problem with your network cabling, run the self-test by turning the printer off, and then on again. If the error persists, there might be a problem with the HP Jetdirect print server.
11 LAN ERROR - RETRY FAULTS	(Ethernet) There is a problem with your network cabling or external network configuration. Verify operation of the hub or switch port.
12 LAN ERROR - NO LINKBEAT	Using a wired Ethernet port, this message is displayed if a link beat is not sensed. Check the network cable, and verify that the concentrator/hub is providing a link beat.

Table 8-14 Error messages (continued)

Error Code and Message	Description
13 NETWORK RECONFIG - MUST REBOOT	Reset or turn the print server off and then on to enable new configuration values.
14 DISCONNECTED	Novell NetWare protocol is disconnected. Check the server and the print server.
15 CONFIGURATION ERROR	(Ethernet) Configuration information for the NetWare functions is not stored correctly on the print server. Use the installation software, HP Embedded Web Server, or other tools to reconfigure the print server. If this error persists, there might be a problem with the HP Jetdirect print server.
16 NOT CONFIGURED	(Ethernet) Print server is not configured for NetWare. Use the installation software, HP Embedded Web Server, or other tools to configure the print server for NetWare networks.
17 UNABLE TO FIND SERVER	(Ethernet) HP Jetdirect print server is unable to find the NetWare print server (Remote Printer mode) or file server (Queue Server mode). (There was no response to service queries for advertising print servers or file servers that matched the configured print server or file server name.) Verify that the print or file server is running and that the name configured on the HP Jetdirect print server matches the actual name used by the print or file server. Verify that all cables and routers are functioning correctly.
18 PASSWORD ERROR	Print server detected that the password for the NetWare print server object is incorrect. Use a NetWare utility (such as PCONSOLE) to erase the print server object password. A new password is set when the HP Jetdirect print server logs on again. NOTE: When multiple file servers are configured, the error is only displayed on the configuration page if none of the file servers are connected.
19 NO QUEUE ASSIGNED	The HP Jetdirect print server object is not assigned any queues to service. Assign queues to the print server object using printer installation or NetWare utilities. NOTE: When multiple file servers are configured, the error is displayed on the configuration page only if none of the file servers are successfully connected.
1A PRINTER NUMBER NOT DEFINED	A NetWare printer number for this printer has not been configured. Assign a valid printer number to the HP Jetdirect print server. Use a NetWare utility (such as PCONSOLE), the HP Embedded Web Server, or other tool to assign a printer number.
1B PRINTER NUMBER IN USE	Assigned NetWare printer number is already in use by another printer. Assign an unused printer number. Can also occur when a print server is turned off and then on. The error clears after the print server times out and detects the lost connection.
1C PRINT SERVER NOT DEFINED	File server does not contain a print server object that corresponds to the specified NetWare node name. Use printer installation software, a NetWare utility (such as PCONSOLE), or another tool to create the print server object. When the HP Jetdirect print server is configured for multiple file servers, the error is displayed on the configuration page only if none of the file servers connected.
1D UNABLE TO CONNECT TO SERVER	Remote printer mode error. Print server is unable to establish an SPX connection with the NetWare print server. Verify the NetWare print server is running and that all cables and routers are functioning correctly.
1E FAIL RESERVING PRINTER NUM	The SPX connection to the print server was lost when the HP Jetdirect print server attempted to reserve the printer number. Can indicate a network or print server problem. Verify all cables and routers are functioning correctly. Try restarting the print server.

Table 8-14 Error messages (continued)

Error Code and Message	Description
1F ERR NEGOTIATING BUFFER SIZE	<p>Failure detected when selecting the buffer size to use when reading print data from the file server. Can indicate a network problem.</p> <p>When the HP Jetdirect print server is configured for multiple file servers, the error is displayed on the configuration page only if none of the file servers successfully connected.</p>
20 UNABLE TO LOGIN	<p>Failure detected when the HP Jetdirect print server tried to log onto the file server. Can be caused if the print server object does not exist on the file server, or when a security check prevents the print server from logging in.</p> <p>Verify the file server name and print server object name are correct. Use PCONSOLE to erase the print server object password, and create a new print server object.</p> <p>When the HP Jetdirect print server is configured for multiple file servers, the error is only displayed on the configuration page if none of the file servers made the connection.</p>
21 UNABLE TO SET PASSWORD	<p>Failure detected when the print server tried to set the print server object password. (If the HP Jetdirect print server is able to log in without a password, it sets the password automatically.) Indicates a networking or security problem. Create a new print server object.</p> <p>When multiple file servers are configured, the error is displayed on the configuration page only if none of the file servers successfully connected.</p>
22 UNABLE TO CONNECT TO SERVER	<p>Queue server mode error. Print server could not establish an NCP connection to the file server. Verify the correct file servers are connected.</p> <p>When multiple file servers are configured, the error is only displayed on the configuration page if none of the file servers successfully connected.</p>
23 UNABLE TO ATTACH TO QUEUE	<p>Failure detected when the HP Jetdirect print server tried to attach to one of the queues assigned to the print server object. Can occur if no servers are allowed to attach to this queue, or if there is a networking or security problem. Use PCONSOLE to verify servers can attach to the queue, to delete the print server object from the list of queue servers (to have the the HP Jetdirect print server service other queues), or to delete the queue and create a new one (add the print server object to the list of queue servers).</p> <p>When the HP Jetdirect print server is configured for multiple file servers, the error is only displayed on the configuration page if none of the file servers made the connection.</p>
24 PSERVER CLOSED CONNECTION	<p>The NetWare print server requested a termination of the connection with the HP Jetdirect print server. No error exists or is indicated. Verify the NetWare print server is running, and restart it if necessary.</p>
25 DISCONNECTING - SPX TIMEOUT	<p>The SPX connection to the print server was lost after the connection was made. Indicates a possible network or print server problem. Verify all cables and routers are functioning correctly. Restart the print server.</p>
26 UNKNOWN NCP RETURN CODE	<p>Print server encountered an unexpected fatal error after successfully connecting to the file server. A number of failures could produce this error message, including a downed file server or a network router failure.</p>
27 UNEXPECTED PSERVER DATA RCVD	<p>The HP Jetdirect print server received data without providing permission. Indicates a possible print server or software problem.</p>

Table 8-14 Error messages (continued)

Error Code and Message	Description
28 OUT OF BUFFERS	The HP Jetdirect print server cannot allocate a buffer from its internal memory. All buffers might be busy due to heavy broadcast traffic or large amounts of network traffic directed to the print server.
29 UNABLE TO SENSE NET NUMBER	The HP Jetdirect print server attempted to determine the NetWare protocol used on the network. (The server attempts for 3 minutes.) Verify that file servers and routers are operating correctly, and that the settings for NetWare frame type and source routing are correct.
2A NDS ERR: EXCEEDS MAX SERVERS	More queues are assigned than the HP Jetdirect print server can service. Remove one or more print queues from the list to be serviced by queue server mode.
2B NDS ERR: UNABLE TO LOGIN	Unable to log onto the NetWare directory tree. Verify the print server object is defined in the directory at the correct context. Clear the print server password using NWADMIN or similar NetWare tool.
2C NDS AUTHENTICATION ERROR	Unable to log onto the NetWare directory tree. Verify the print server object is defined in the directory at the correct context.
2D NDS ERR: CHANGE PSSWRD FAILED	Cannot change the print server password to the value expected by the HP Jetdirect print server.
2E NDS SERVER PUBLIC KEY ERROR	Print server object name mismatch. Unable to read the file server's public key. Verify object names, or contact the NDS administrator.
2F NDS ERR: SRVR NAME UNRESOLVD	Cannot locate the file server on the network. The server is not running or a communications problem exists.
30 NDS PRINT SERVER NAME ERROR	Cannot locate the HP Jetdirect print server object in the specified NDS context.
31 NDS PS PRINTER LIST ERROR	Cannot locate a list of printer objects assigned to the print server object.
32 NDS PRINTER OBJ NOTIFY ERR	Cannot locate the list of notification objects assigned to the printer object.
33 NDS PRINT OBJ QUEUE LIST ERR	Cannot locate the list of print queues assigned to the printer objects.
34 NDS ERR: UNRESOLVD PRNTR OBJ	Cannot locate the printer object in the NDS directory.
35 NDS ERR: INVALID SRVR VERS	Current version of the NetWare file server is not supported.
36 NDS ERR: NO PRINTER OBJECTS	No printer objects are assigned to the print server object configured to this HP Jetdirect print server.
37 NDS ERR: MAX PRINT OBJECTS	Too many printer objects assigned to the print server object. Using NetWare utilities (such as NWADMIN), reduce the number of printer objects assigned to the print server.
38 NDS ERR: NO QUEUE OBJECTS	No print queue objects assigned to the printer objects located in the NDS directory.
39 NDS ERR: MAX QUEUE OBJECTS	Too many print queue objects are assigned to the printer. Reduce the number of queues assigned.
3A NDS ERR: UNABLE TO FIND TREE	Cannot locate the NDS tree. Can occur when the file server is not running or when a network communications problem exists.
3B NDS CONNECTION STATE ERROR	Print server cannot change the NDS connection state. Check licenses on the spooling server.

Table 8-14 Error messages (continued)

Error Code and Message	Description
3C NDS ERR: UNRESOLVED QUEUE	Cannot locate the print queue object in the specified NDS context.
3D NDS ERR: CANNOT READ Q HOST	Cannot locate the file server on the network. The server is not running or a communications problem exists.
3E NDS PRNT SRVR PUBLIC KEY ERR	Print server object name mismatch. Unable to read the print server's public key. Verify object names. Verify that the object key assigned to the HP Jetdirect print server is a print server object and not a printer or other object.
3F UNABLE TO GET NDS SRVR ADDR	Cannot locate or access the NDS server address.
40 ARP DUPLICATE IP ADDRESS	ARP layer detected another node on the network using the same IP address as the HP Jetdirect print server. Extended error information can show the hardware address of the other node.
41 NOVRAM ERROR	HP Jetdirect print server cannot read the contents of its NOVRAM.
42 INVALID IP ADDRESS	The specified IP address for the HP Jetdirect print server (through BOOTP) is invalid for a single node. Check your Bootptab file for proper entries.
43 INVALID SUBNET MASK	Specified IP subnet mask for the HP Jetdirect print server (through BOOTP) is invalid. Check your Bootptab file for proper entries.
44 INVALID GATEWAY ADDRESS	Specified default gateway IP address for the HP Jetdirect print server (through BOOTP) is an invalid for a single node. Check your Bootptab file for proper entries.
45 INVALID SYSLOG ADDRESS	Specified syslog server IP address for the HP Jetdirect print server (through BOOTP) is invalid for a single node. Check your Bootptab file for proper entries.
46 INVALID SERVER ADDRESS	The specified TFTP server IP address for the HP Jetdirect print server (through BOOTP) is invalid for a single node. Check your Bootptab file for proper entries.
47 INVALID TRAP DEST ADDRESS	One of the SNMP trap (Trap PDU) destination IP addresses for the HP Jetdirect print server (through TFTP) is invalid for a single node. Check your TFTP configuration file.
48 CF ERR - FILE INCOMPLETE	The TFTP configuration file contains an incomplete last line (does not end in a newline character).
49 CF ERR - LINE TOO LONG	A TFTP configuration file line is longer than the HP Jetdirect print server can accept.
4A CF ERR - UNKNOWN KEYWORD	A TFTP configuration file line contains an unknown keyword.
4B CF ERR - MISSING PARAMETER	A TFTP configuration file line is missing a required parameter.
4C CF ERR - INVALID PARAMETER	A TFTP configuration file line contains an invalid value for one of the parameters on that line.
4D CF ERR - ACCESS LIST EXCEEDED	TFTP configuration file specified too many access list entries that use the <code>allow</code> keyword.
4E CF ERR - TRAP LIST EXCEEDED	TFTP configuration file specifies too many trap destination list entries that use the <code>trap-destination</code> keyword.
4F TFTP REMOTE ERROR	TFTP transfer of the configuration file from the host to the HP Jetdirect print server failed. The remote host sent a TFTP error packet to the print server.

Table 8-14 Error messages (continued)

Error Code and Message	Description
50 TFTP LOCAL ERROR	TFTP transfer of the configuration file from the host to the HP Jetdirect print server failed. The local print server encountered an inactivity timeout or excessive retransmission situation.
51 TFTP RETRIES EXCEEDED	Retry limit exceeded when transferring the TFTP configuration file from the host to the HP Jetdirect print server.
52 BAD BOOTP/DHCP REPLY	Error detected in the BOOTP or DHCP reply received by the HP Jetdirect print server. The reply contains insufficient data in the UDP datagram for the minimum BOOTP/DHCP header of 236 bytes, has an operation field that is not BOOTPREPLY(0X02), has a header field that does not match the print servers hardware address, or contains a UDP source port that is not the BOOTP/DHCP server port (67/udp).
53 BAD BOOTP TAG SIZE	Tag size in a vendor-specific field in the BOOTP reply is either 0, or greater than the remaining number of unprocessed bytes in the vendor-specified area.
54 BOOTP/RARP IN PROGRESS	Print server is obtaining its basic IP configuration information through BOOTP/RARP.
55 BOOTP/DHCP IN PROGRESS	HP Jetdirect print server is obtaining its basic IP configuration information through BOOTP/DHCP (no errors detected).
56 DHCP NAK	Print server received a negative acknowledgement message from the DHCP server in response to a configuration request.
57 UNABLE TO CONNECT DHCP SVR	The HP Jetdirect print server received IP parameters from a DHCP server, but communication with the server is lost. Check status of the DHCP server. If an infinite lease is assigned, the print server uses the IP address of the most recent DHCP server. Operation can degrade until a DHCP server responds.
58 POSTSCRIPT MODE NOT SELECTED	Printer does not support AppleTalk or AppleTalk extensions.
59 INCOMPLETE F/W - MUST DOWNLOAD	Currently downloading firmware to the HP Jetdirect print server, or the download did not complete properly.
5A TURN PRINTER OFF / ON	Firmware download is complete. Turn the HP Jetdirect print server off and then on.
5C DHCP BAD REPLY	Bad reply received from the DHCP server. Check your DHCP server settings for this print server.
5D DHCP LEASE DURATION TOO SHORT	DHCP lease times for this print server's TCP/IP configuration settings are too short. Re-configure the DHCP lease times on the DHCP server.
5E DHCP LEASE RELEASED	Lease parameters for DHCP, including the IP address, were released through a manual configuration method, such as the printer's control panel.
5F WINS REGISTRATION FAILED	Cannot register the print server's name on the WINS server. Check for duplicate names, or verify the WINS server configuration.
61 AUTO IP CONFIGURED	Cannot retrieve an IP address over the network. The print server defaults to an IP address using link-local addressing in the form 169.254.x.x.
62 DEFAULT IP CONFIGURED	Cannot retrieve an IP address over the network. The print server defaults to a legacy IP address 192.0.0.192.
63 AUTO IP IN PROGRESS	The print server is automatically assigning an IP address using link-local addressing in the form 169.254.x.x.

Table 8-14 Error messages (continued)

Error Code and Message	Description
64 INVALID PASSWORD	An invalid password was specified through TFTP. Verify that the password consists of a maximum of 16 printable characters.
65 DOWNLOAD NOT ALLOWED ON WIRELESS	This print server does not allow firmware upgrade over a wireless network connection.
83 DISCONNECTING FROM SERVER	Server shut down because of a configuration change or reset request. This message automatically clears after a few seconds, unless the printer is offline, is in an error state, or is servicing another I/O port or another network protocol.
84 DHCP LEASE TIMERS ADJUSTED	The print server detected a DHCP lease error due to one of the following conditions: <ul style="list-style-type: none">• Renew time is less than 30 seconds.• Rebind time is less than 52 seconds.• Rebind time is less than, or equal to, the Renew time.• Lease duration is less than, or equal to, the Rebind time.
F1 TRYING TO CONNECT TO SERVER	The HP Jetdirect print server is attempting connection to the NetWare server(s). This is a normal message. Wait until the connection is established or another status message appears.
F2 TFTP IN PROGRESS	The print server is attempting to use TFTP to obtain TCP/IP configuration settings over the network.
F3 BOOTP/RARP IN PROGRESS	The print server is attempting to use BootP or RARP to obtain TCP/IP configuration settings over the network.
F4 BOOTP/DHCP IN PROGRESS	The print server is attempting to use BootP or DHCP to obtain TCP/IP configuration settings over the network.

HP Jetdirect Security page

If the HP Jetdirect print server supports IPsec, you can print an enhanced Security page from the HP Jetdirect menu that is accessed through the printer control panel. The following figure shows a typical Security page:

 **NOTE:** This section describes a typical security page. The actual security page content depends on the HP Jetdirect product and the firmware version.

To print the [HP Jetdirect Security Page](#):

1. On the printer control panel, navigate to the HP Jetdirect menus.
2. In the HP Jetdirect menus, locate and select the [Security](#) menu item.
3. In the [Security](#) menu, locate and select [Print Sec Page](#). (This option is displayed only if IPsec is supported by the print server.)
4. Click [Yes](#) to print the security page.

Figure 8-2 HP Jetdirect Security Page

```

HP Jetdirect Security Page (1/4) ( English - PCL )

----- General Information -----
Admin Password:      Not Specified
SNMP Versions:      1,2
SNMP Set Cmty Name: Not Specified
SNMP Get Cmty Name: Not Specified
Access List:        Not Specified
Secure Web:         HTTPS Required

----- Local IP Addresses -----
16.181.223.22
fe80::211:aff:fefa:aeee
2000::afe5:16f8:de6a:80c3

----- ID Certificate -----
ID Certificate:      INSTALLED
ISSUER CN:          HP Jetdirect OAPFAAKE
Subject CN:         HP Jetdirect OAPFAAKE
Valid From:         2007-07-01 00:00 UTC
Valid To:           2012-07-01 00:00 UTC
Signature Algorithm: MDS
Extended Key Usage: Not Applicable
Thumbprint:
SHA1:edfc0db83fc137acafb35d9dac3868166e7
MD5: 9266f1fc1e7ddee495a185a177elc2b3

----- CA Certificate -----
CA Certificate:      INSTALLED
ISSUER CN:          SPIRootCA
Subject CN:         SPIRootCA
Valid From:         2005-02-04 22:10 UTC
Valid To:           2015-02-02 22:10 UTC
Signature Algorithm: SHA1
Extended Key Usage: Not Applicable
Thumbprint:
SHA1:725cc077631325b49b498b7631553782695
MD5: 657399584a8235c3dd0dbf977ebae5

----- 802.1X Information -----
802.1X Method:      Not Applicable
Encryption Strength: LOW
Server ID:          Not Specified
User Name:
Password:           Not Specified
Require Exact Match: Not Set
Reauthenticate on apply: Not Set

----- 802.1X Error Log -----

HP Jetdirect Security Page (2/4) ( English - PCL )

----- IKE Stats -----
Phase 1 Failures: 0
Quick Mode Failures: 0
Rekeys: 0
IKE Connections OK (I/Q): 0/0

----- IPsec Stats -----
Fragmentation Errors: 0
ESP MAC Errors: 0
AH MAC Errors: 0
Replay Errors: 0
Drop Rule: 0
Reject Rule: 0
No Rule: 0
Generic Drops: 0
ESP (Rx/Tx): 0/0
AH (Rx/Tx): 0/0
Total (Rx/Tx): 0/0

----- Multicast/Broadcast Rules -----
DHCPv4/BOOTP: Enabled
ICMPv4: Enabled
DHCPv6: Enabled
ICMPv6: Enabled
ICMPv6: Enabled
SLP Config: Enabled
IGMPv2: Enabled
Bonjour: Enabled
NTP: Enabled
WS-Discovery: Enabled

----- IPsec/Firewall Rules -----
IPsec/Firewall: Disabled
Allow: 0
DROP: 0
IPSEC: 0
Default: DROP
Fail-safe: Disabled

----- IPsec Error Log -----
Log Entry 1
Log Entry 2
Log Entry 3
Log Entry 4

----- Available Network Services -----
Legend: R - Remote, L - Local, U - Unsecured, S - Secured

```

The parameters in each section of the Security page are described in the following table.

Security settings

This section of the Security page displays similar information to that provided by the standard HP Jetdirect configuration page. See the following table.

Table 8-15 General Information

Message	Description
802.1X	EAP/802.1X client authentication setting to use. EAP-TLS Use EAP-TLS. EAP-PEAP Use EAP-PEAP. Specified Use an 802.1X authentication protocol other than EAP-TLS/EAP-PEAP. Not Specified No authentication specified.

Table 8-15 General Information (continued)

Message	Description
IPsec	<p>Current IPsec status.</p> <p>Enabled Enabled and operating as configured.</p> <p>Disabled Turned off.</p> <p>Policy Failed Print server failed to implement the IPsec policy. You might need to reset security (using the control panel or the HP Embedded Web Server), or perform a cold reset of the print server.</p>
Admin Password	<p>IP Administrator password is configured on the print server. This password is shared by Telnet, the HP Embedded Web Server, and HP Web Jetadmin to control access to print server configuration parameters. (Consists of up to 16 alphanumeric characters.)</p> <p>Not Specified Password is not set.</p> <p>Set Password is set.</p> <p>Clear the password using a cold reset.</p>
Cert Expires	<p>Expiration date of the digital certificate for SSL/TLS encrypted security. The date is in UTC format (for example, 2012-10-02 12:45 UTC).</p> <p>Not Applicable Digital certificate is not installed.</p>
SNMP Versions:	<p>SNMP versions enabled on the print server.</p> <p>Disabled All versions are disabled. No SNMP access is allowed.</p> <p>1;2 SNMP v.1 and SNMP v.2c supported, and SNMP v.3 is disabled, or not supported.</p> <p>1;2;3-na/np SNMP v.1, v.2c, and v.3 are enabled. v.3 is enabled with the minimum security of no authentication (na) and no privacy (np).</p> <p>1;2;3-a/np SNMP v.1, v.2c, and v.3 are enabled. v.3 is enabled with the minimum security of authentication enabled (a) but no privacy (np).</p> <p>1;2;3-a/p SNMP v.1, v.2c, and v.3 are enabled. v.3 is enabled with the minimum security of authentication (a) with privacy (p) enabled.</p> <p>3-na/np SNMP v.1 and v.2c are disabled. SNMP v.3 is enabled with the minimum security of no authentication (na) and no privacy (n).</p> <p>3-a/np SNMP v.1 and v.2c are disabled. SNMP v.3 is enabled with the minimum security of authentication enabled (a) but no privacy (np).</p> <p>3-a/p SNMP v.1 and v.2c are disabled. SNMP v.3 is enabled with the minimum security of authentication (a) with privacy (p) enabled.</p>
SNMP Set Cmty Name	<p>SNMP set community name is set on the HP Jetdirect print server. An SNMP set community name is a password for write access to SNMP control functions (SNMP SetRequests) on the HP Jetdirect print server.</p> <p>Not Specified Set community is not set.</p> <p>Specified Set community is set.</p>

Table 8-15 General Information (continued)

Message	Description
SNMP Get Cmty Name	<p>SNMP get community name is configured on the HP Jetdirect print server. This is a password to determine which SNMP GetRequests the HP Jetdirect print server responds to. If a Get community name is set, the print server responds to either a user specified community name or the factory-default.</p> <p>Not Specified Get community is not set.</p> <p>Specified Get community is set.</p>
Access List	<p>(IPv4 only) Access control list is configured on the HP Jetdirect print server. This list specifies the IP address of individual systems, or IP network of systems, that are allowed access to the print server and device.</p> <p>Specified Host access list is configured.</p> <p>Not Specified Host access list is not configured.</p>
Secure Web	<p>Use encrypted communications between a browser and the HP Embedded Web Server.</p> <p>Optional (HTTPS/HTTP) Allows un-encrypted communication using standard HTTP ports, as well as encrypted communications using HTTPS.</p> <p>HTTPS Required Allow only encrypted communications on HTTPS.</p>

IPsec Error Log

This section provides IPsec error messages contained in the following table.

Table 8-16 IPsec Error Log

Message	Description
Deprecated Template	<p>A Service template from a prior HP Jetdirect firmware version was detected. The template is in one of the following states:</p> <ul style="list-style-type: none"> Configured as a predefined template and available for use. However, it might not be valid. Upgrade the HP Jetdirect firmware to the most recent version. Saved as a custom service template, which might have been replaced by a new predefined version available for use. Review your IPsec/Firewall policy and ensure the appropriate service templates are used.
Upgrade HP Jetdirect Firmware	You should upgrade the firmware version on your HP Jetdirect print server.

Local IP addresses

This section lists the IPv4 and IPv6 addresses configured on the print server.

IPsec Statistics

IPsec statistics gathered and reported by the print server are described in the following table.

Table 8-17 IPsec statistics

Message	Description
Fragmentation Errors	Number of fragmented packets that cannot be reassembled.
ESP MAC Errors	Number of encapsulating security payload (ESP) MAC errors. MAC is used to verify that the received message is the same as the one sent.
AH MAC Errors	Number of authentication header (AH) MAC errors. MAC is used to verify that the message received is the same as the one sent.
Replay Errors	Number of replay attacks, where unauthorized packets are resent.
Drop Rule	Number of dropped packets based on the IPsec rule (set to drop all non-IPsec traffic). Client notification of dropped packets is not provided.
Reject Rule	Number of rejected IPsec packets. Client notification of rejected packets is provided through ICMP error messages.
No Rule	Number of received packets for which an IPsec policy rule is not configured.
Generic Drops	Number of dropped packets that are not counted by other statistics.
ESP (Rx/Tx):	Total number of ESP packets received (Rx) and transmitted (Tx) by the print server.
AH (Rx/Tx)	Total number of AH packets received (Rx) and transmitted (Tx) by the print server.
Total (Rx/Tx)	Total number of all packets received (Rx) and transmitted (Tx) by the print server.

IKE Stats

Internet key exchange (IKE) statistics for the print server are described in the following table.

Table 8-18 IKE Statistics

Message	Description
Phase 1 Failures	Number of authentication failures that occur when the print server is establishing a connection over IPsec. These result in connection failures.
Quick Mode Failures	Number of post-authentication failures that occur during IPsec protocol configuration, which result in connection failures.
Rekeys	Number of times keys were regenerated. For example, this can occur after a key lifetime setting is exceeded and then regenerated.
IKE Connections OK (1/Q)	Number of successful IPsec connections for both Phase 1 and Quick Mode attempts, separated by a slash (Phase 1 count / Quick Mode count).

IPsec Rules

This section of the Security page identifies the IPsec policy of the print server. The IPsec policy consists of rules that control the security of the traffic received and transmitted by the print server. Rules are configured with an IPsec configuration wizard, which is accessed from the HP Embedded Web Server. You can configure up to ten rules.

The heading of this section indicates the default rule for IPsec traffic (Def: Pass or Drop)

- **Pass** Allow all non-IPsec traffic.
- **Drop** Drop all non-IPsec traffic.

For each rule configured, the names of the IP address template, service template, and IPsec template that define the rule are displayed. For more information, see [IPsec/Firewall configuration \(V.40.xx\) on page 105](#).

IPsec Security Associations (SA) table

The IPsec SA Table lists the security associations of cached IPsec sessions between two hosts. For active sessions, all detected security associations are listed in the table. If required, multiple pages print.

Table 8-19 IPsec Security Associations

Message	Description
SA Pair number	An SA table entry pair number. Up to eight entries are displayed.
Protocol	Protocol used by the hosts: TCP, UDP, ICMP, IGMPv2
SRC	IP address of the host that initiates the IPsec traffic.
DST	IP address of the host that receives the IPsec traffic.
In	Number of IPsec packets received, transmitted, or dropped by the print server.
Out	
Dropped	

Available Network Services

This section lists the well-known ports of HP Jetdirect services being accessed. A remote port is associated with a remote client application. A local port identifies a service and port number on the HP Jetdirect print server. A port is either secure or not secure, depending on the IPsec policy configuration.

For example, for LPD printing enabled with an IPsec rule, a local TCP, secure, port 515 might be listed. Port 515 is a well-known port for LPD services. If the print server is connected to a remote application's port 25, it might list remote TCP, unsecure, port 25 of the client.

A LPD printing

The HP Jetdirect print server contains an LPD server module to support LPD printing. This chapter describes how to configure the HP Jetdirect print server for use with various systems that support LPD printing, and includes the following sections:

- [LPD on UNIX systems on page 165](#)
 - Configuring BSD-based UNIX systems using LPD
 - Configuring print queues using the SAM utility (HP-UX systems)
- [LPD on Windows Server 2003/2008 systems on page 168](#)
- [LPD on Windows XP systems on page 170](#)

 **NOTE:** For systems not listed, see your operating system documentation and online help.

Recent versions of Novell NetWare (NetWare 5.x with NDPS 2.1 or greater) support LPD printing. For setup instructions and support, see the supplied NetWare documentation. Also, see the Technical Information Documentation (TID) on Novell's support Web site.

About LPD

Line printer daemon (LPD) refers to the protocol and programs associated with line-printer spooling services that are typically installed on various TCP/IP systems.

Some of the systems in which the HP Jetdirect print server functionality supports LPD include:

- Berkeley-based (BSD) UNIX systems
- HP-UX
- Solaris
- IBM AIX
- Linux
- Windows Server 2003/2008

The UNIX configuration examples in this section show the syntax for BSD-based UNIX systems. The syntax for your system can vary. See your system documentation for the correct syntax.

 **NOTE:** Use LPD functionality with any host implementation that complies with the RFC 1179 document. The process for configuring printer spoolers, however, might differ. See your system documentation for information on configuring these systems.

The LPD programs and protocol include the following:

Table A-1 LPD programs and protocols

Program Name	Purpose of Program
lpr	Queue jobs for printing

Table A-1 LPD programs and protocols (continued)

Program Name	Purpose of Program
lpq	Display print queues
lprm	Remove jobs from print queues
lpc	Control print queues
lpd	Scan and print the files if the specified printer is connected to the system If the specified printer is connected to another system, this process forwards the files to an lpd process on the remote system where the files are to be printed.

Requirements for configuring LPD

Your printer must be properly connected to the network through the HP Jetdirect print server, and you must have print server status information. This information is listed on the HP Jetdirect printer configuration page. If you have not printed a configuration page from your printer, see your printer documentation for instructions. You must also have the following:

- Operating system that supports LPD printing.
- Superuser (root) or administrator access to your system.
- LAN hardware address (or station address) of the print server. This address is displayed with print server status information on the HP Jetdirect configuration page and is of the form:

HARDWARE ADDRESS: xxxxxxxxxxxx

In this example, x is a hexadecimal digit (for example, 0001E6123ABC).

- IP address configured on the HP Jetdirect print server.

LPD setup overview

To configure the HP Jetdirect print server for LPD printing, complete the following:

1. Set up IP parameters.
2. Set up print queues.
3. Print a test file.

The following sections provide detailed descriptions for each step.

Step 1. Set up IP parameters

To set up IP parameters on the HP Jetdirect print server, see [TCP/IP configuration on page 14](#).

Step 2. Set up print queues

Set up a print queue for each printer or printer personality (PCL or PostScript) you use on your system. Different queues are required for formatted and unformatted files. The following table lists the supported queue types and how the line HP Jetdirect printer daemon server processes each.

Table A-2 Supported queue types

raw, raw1, raw2, raw3	No processing. Treats the data in the queue as a print job already formatted in the PCL, PostScript, or HP-GL/2 and sends it to the printer without modification.
text, text1, text2, text3	Carriage return added. Treats data in the queue as unformatted or ASCII text, and adds a carriage return to each line before sending to the printer.
auto, auto1, auto2, auto3	Automatic. Uses auto-sensing to determine whether the print data is sent as raw or text.
binps, binps1, binps2, binps3	Binary PostScript. Instructs the PostScript interpreter that the print job is binary PostScript data.
<user-defined>	(Full-featured print servers only) Define pre and post-print data strings, which can include job control commands that are automatically added before or after the print job. You can set up print queues using Telnet or the HP Embedded Web Server.

Step 3. Print a test file

Print a test file using the LPD commands. For instructions, see the information provided for your system.

LPD on UNIX systems

Configure print queues for BSD-based systems

Edit the `/etc/printcap` file to include the following entries:

```
printer_name | short_printer_name:\
:lp=\
:rm=node_name:\
:rp=remote_printer_name_argument:\
:lf=/usr/spool/lpd/error_log_filename:\
:sd=/usr/spool/lpd/printer_name:
```

In the example, `short_printer_name` identifies the printer to the user, `node_name` identifies the printer on the network, and `remote_printer_name_argument` is the print queue designation (such as `text`, `raw`, `binps`, `auto`, or `user-defined`).

For more information on `printcap`, see the `printcap` man page.

Example: Printcap entries for ASCII or text printers

```
lj1_text | text1:\
:lp=\
:rm=laserjet1:\
:rp=text:\
:lf=/usr/spool/lpd/lj1_text.log:\
:sd=/usr/spool/lpd/lj1_text:
```

Example: Printcap entries for postScript, PCL, or HP-GL/2 printers

```
lj1_raw | raw1:\
:lp=\
:rm=laserjet1:\
:rp=raw:\
:lf=/usr/spool/lpd/lj1_raw.log:\
:sd=/usr/spool/lpd/lj1_raw:
```

If your printer does not support automatic switching between PostScript, PCL, and HP-GL/2 languages, use the printer's control panel (if available) to select the printer language or rely on the application to select the printer language via commands embedded in the print data.

Ensure users know the printer names, because they must enter the names on the command line when printing.

Create the spooling directory by entering the following at the root directory:

```
mkdir /usr/spool/lpd
cd /usr/spool/lpd
mkdir printer_name_1 printer_name_2
chown daemon printer_name_1 printer_name_2
chgrp daemon printer_name_1 printer_name_2
chmod g+w printer_name_1 printer_name_2
```

In the example, `printer_name_1` and `printer_name_2` see the printers to be spooled. You can spool several printers. The following example shows the command to create the spooling directories for printers used for text (or ASCII) printing and for PCL or PostScript printing.

Example: Create spooling directory for text and PCL/postScript printers

```
mkdir /usr/spool/lpd
cd /usr/spool/lpd
mkdir lj1_text lj1_raw
chown daemon lj1_text lj1_raw
chgrp daemon lj1_text lj1_raw
chmod g+w lj1_text lj1_raw
```

Use SAM to configure print queues (HP-UX systems)

On HP-UX systems, use the SAM utility to configure remote print queues for printing text files (ASCII) or raw files (PCL, PostScript, or other printer language).

Before you begin, select an IP address for the HP Jetdirect print server and add an entry for it in the `/etc/hosts` file on your HP-UX system.

1. Start the SAM utility as the superuser.
2. Select `Peripheral Devices` from the `Main` menu.
3. Select `Printers/Plotters` from the `Peripheral Devices` menu.
4. Select `Printers/Plotters` from the `Printers/Plotters` menu.
5. Select `Add a Remote Printer` from the `Actions` list, then select a printer name.

Examples: `my_printer` or `printer1`

6. Select a remote system name. In the following example, the node name (`jetdirect1`) of the HP Jetdirect print server is used:

Example: `jetdirect1`

7. Select a remote printer name.

Type `text` for ASCII or `raw` for PostScript, PCL, or HP-GL/2.

Type `auto` to let the line printer daemon select automatically.

Type `binps` to instruct the PostScript interpreter to interpret the print job as binary PostScript data.

Type the name of a user-defined queue to include predefined strings before and/or after the print data (set up user-defined queues using Telnet or the HP Embedded Web Server).

8. Check for a remote printer on a BSD system. You must type `Y`.
9. Click `OK` at the bottom of the menu. If the configuration is successful, the program prints the message:

The printer has been added and is ready to accept print requests.

10. Click `OK` and select `Exit` from the `List` menu.

11. Select `Exit Sam`.

 **NOTE:** By default, the print scheduler (`lpsched`) is not running. Turn the scheduler on when you set up your print queues.

Print a test file

To verify that the printer and print server connections are correct, print a test file using the following steps:

1. At the UNIX system prompt type: `lpr -Pprintername filename`

In the example, `printername` is the designated printer and `filename` is the file to print.

Examples (for BSD-based systems):

Text File: `lpr -Ptext1 textfile`

PCL File: `lpr -Praw1 pclfile.pcl`

PostScript File: `lpr -Praw1 psfile.ps`

HP-GL/2 File: `lpr -Praw1 hpglfile.hpg`

For HP-UX systems, use `lp -d` instead of `lpr -P`.

2. To display the print status, type the following at the UNIX prompt: `lpq -Pprintername`

In the example, `printername` is the designated printer.

Examples (for BSD-based systems): `lpq -Ptext1`

`lpq -Praw1`

For HP-UX systems, use `lpstat` instead of `lpq -P`.

This completes the process for configuring the HP Jetdirect print server to use LPD.

LPD on Windows Server 2003/2008 systems

Use the information in this section to configure supported Windows networks to use the HP Jetdirect LPD services.

- Install TCP/IP software (if required).
- Configure a network LPD printer.

Install TCP/IP software

Use this procedure to verify whether you have TCP/IP installed on a supported Windows system and to install the software, if necessary.

 **NOTE:** You might need your Windows System distribution files or CD-ROMs to install TCP/IP components.

1. To check whether you have Microsoft TCP/IP Printing protocol and TCP/IP printing support, complete the following:
 - Click **Start, All Programs, Accessories, Communications**, and open the **Network Connections** folder. Double-click the **Local Area Connection** for your network and click **Properties**.
 - If Internet Protocol (TCP/IP) is listed and enabled in the list of components used by this connection, the necessary software is installed. Proceed to [Configure a network printer for Windows Server 2003/2008 systems on page 169](#). Otherwise, continue with step 2.
2. If you have not previously installed the software:
 - In the **Local Area Connection Properties** window, click **Install**. In the **Select Network Component Type** window, select **Protocol** and click **Add** to add the **Internet Protocol (TCP/IP)**.
Follow the on-screen instructions.
3. Enter TCP/IP configuration values for the computer:
 - On the **General** tab in the **Local Area Connection Properties** window, select **Internet Protocol (TCP/IP)** and click **Properties**.

If you are configuring a Windows server, type the IP address, default gateway address, and subnet mask in the appropriate spaces.

If you are configuring a client, verify with your network administrator whether to enable automatic TCP/IP configuration or enter a static IP address, default gateway address, and subnet mask in the appropriate spaces.

4. Click **OK** to exit.
5. If prompted, exit Windows and restart your computer for the changes to take effect.

Configure a network printer for Windows Server 2003/2008 systems

Set up the default printer by performing the following steps.

1. Verify that the Print Services for Unix is installed (required for LPR port availability):
 - a. Click **Start, All Programs, Accessories, Communications**, and open the **Network Connections** folder.
 - b. Click the **Advanced** menu and then select **Optional Networking Components**.
 - c. Select and enable **Other Network File and Print Services**.
 - d. Click **Details**, and verify that **Print Services for Unix** is enabled.
 - e. Click **OK**, and then **Next**.
2. Open the **Printers and Faxes** folder (click **Start, Printers and Faxes**).
3. Double-click **Add Printer**. From the **Add Printer** wizard welcome screen, click **Next**.
4. Select **Local printer**, and disable automatic detection for Plug and Play printer installation. Click **Next**.
5. Choose **Create a new port**, and select **LPR Port**. Click **Next**.
6. In the **Add LPR compatible printer** window:
 - a. Enter the DNS name or IP address of the HP Jetdirect print server.

 **NOTE:** Some client applications might not support direct IPv6 address entry. However, name resolution might be available provided the appropriate IPv6 records are configured in DNS. If name resolution is supported, enter the print server's host name or an FQDN on these applications.

 - b. For the name of the printer or print queue on the HP Jetdirect print server, enter (in lowercase) **raw, text, auto, binps**, or the name of a user-defined print queue (see [HP Embedded Web Server \(V.40.xx\) on page 64](#)).
 - c. Then click **OK**.

 **NOTE:** The HP Jetdirect print server treats text files as unformatted text or ASCII files. Raw files are formatted files in PCL, PostScript, or HP-GL/2 printer languages.

If the queue type is *binps*, the PostScript interpreter is instructed to interpret the print job as binary PostScript data.

7. Select the Manufacturer and Printer model. (If necessary, click **Have Disk** and follow the instructions to install the printer driver.) Click **Next**.
8. Choose to keep the existing driver, if prompted. Click **Next**.
9. Enter a printer name, and choose whether this printer is the default printer. Click **Next**.
10. Choose whether this printer is available to other computers. If shared, enter a share name that identifies the printer to other users. Click **Next**.
11. If desired, enter a location and other information for this printer. Click **Next**.

12. Choose whether to print a test page, and click **Next**.

13. Click **Finish** to close the wizard.

Verify the configuration

In Windows, print a file from any application. If the file prints correctly, the configuration was successful.

If the print job is not successful, try printing directly from DOS using the following syntax: `lpr -S <ipaddress> -P<queue name> filename`

In the example, `<ipaddress>` is the IP address of the print server, `<queue name>` is `raw` or `text` and `filename` is the file to print. If the file prints correctly, the configuration was successful. If the file does not print, or prints incorrectly, see [Troubleshoot the HP Jetdirect print server on page 125](#).

Print from Windows clients

If the LPD printer on the Windows server is shared, Windows clients can connect to the printer on the Windows server using the Windows **Add Printer** wizard in the **Printers** folder.

LPD on Windows XP systems

Use this section to configure Windows XP networks to use the HP Jetdirect LPD services.

The process consists of two parts:

- [Add Windows optional networking components on page 170](#)
- [Configure a network LPD printer on page 171](#)

Add Windows optional networking components

1. Click **Start**.
2. Click **Control Panel**.
3. Click **Network and Internet Connections**.
4. Click the **Network Connections** icon.
5. Select **Advanced** in the top menu bar. In the drop-down list, select **Optional Networking Components**.
6. Select **Other Network File and Print Services** and click **Next**. (If you select **Details** before selecting **Next**, you see **Print Services for UNIX (R)** as a component of **Other Network File and Print Services**.) The files being loaded are shown.
7. Close the **Network Connections** window. **LPR port** is now an option in the **Properties** of a printer under **Ports, Add Port**.

Configure a network LPD printer

Add a new LPD printer

1. Open the **Printers** folder (click **Start, Printers and Faxes**).
2. Click **Add Printer**. On the **Add Printer** wizard welcome screen, click **Next**.
3. Select **Local printer**, then *uncheck* the automatic detection for Plug and Play printer installation. Click **Next**.
4. Select **Create a new port**, and then select **LPR Port** from the pull-down menu. Click **Next**.
5. In the **Add LPR Compatible Printer** window, do the following:
 - a. Type the DNS name or IP address of the HP Jetdirect print server.

 **NOTE:** Some client applications do not support direct IPv6 address entry. However, name resolution might be available, provided the appropriate IPv6 records are configured in DNS. If name resolution is supported, enter the print server's host name or an FQDN on these applications.

 - b. Type (in lowercase) the name of the print queue for the HP Jetdirect print server (for example: raw, text, auto, or binps.)
 - c. Click **OK**.
6. Select the manufacturer and printer model. (If necessary, click **Have Disk** and follow the instructions to install the printer driver.) Click **Next**.
7. Click **Yes** to keep the existing driver, if prompted. Click **Next**.
8. Type a printer name and set this printer as the default (if desired). Click **Next**.
9. Select whether to *share* this printer with other network computers (for example, if your system is a printer server). If shared, type a share name to identify the printer to other users. Click **Next**.
10. If desired, enter a location and other information for this printer. Click **Next**.
11. Click **Yes** to print a test page, then click **Next**.
12. Click **Finish** to close the wizard.

Create an LPR port for an installed printer

1. Click **Start, Printers and Faxes**.
2. Right-click the **Printer** icon, and select **Properties**.
3. Select the **Ports** tab and **Add Port**.
4. Select **LPR Port** from the Printer Ports dialog box, and select **New Port**.
5. In the field labeled **Name or address of server providing lpd**, enter the DNS name or IP address of the HP Jetdirect print server.

 **NOTE:** Some client applications do not support direct IPv6 address entry. However, name resolution might be available provided the appropriate IPv6 records are configured in DNS. If name resolution is supported, enter the print server's host name or an FQDN on these applications.

6. In the dialog box labeled *Name of printer or print queue on that server*, type (in lowercase) the name of the print queue for the HP Jetdirect print server (for example: raw, text, auto, binps, or user-specified print queue).
7. Select **OK**.
8. Select **Close** and **OK** to close the **Properties** box.

B FTP printing

FTP is a basic TCP/IP utility for transferring data between systems. FTP printing sends print files from a client system to an HP Jetdirect connected printer. In an FTP printing session, the client connects and sends a print file to the HP Jetdirect FTP server, which passes the print file to the printer.

You can enable or disable the HP Jetdirect FTP server using a configuration tool, such as Telnet (see [TCP/IP configuration on page 14](#)) or the HP Embedded Web Server (see [HP Embedded Web Server \(V.40.xx\) on page 64](#)).

Requirements

FTP printing requires TCP/IPv4 or TCP/IPv6 client systems using FTP that complies with RFC 959.

 **NOTE:** For the most recent list of tested systems, visit HP online support at www.hp.com/support/net_printing.

Print files

The HP Jetdirect FTP server transfers print files to the printer but does not interpret them. Print files must be in a language recognized by the printer (such as PostScript, PCL, or unformatted text). For formatted print jobs, first print to a file from your application by using the driver for the selected printer, then transfer the print file to the printer through an FTP session. For formatted print files, use binary (image) type transfers.

Use FTP printing

FTP connections

FTP printing uses a TCP control connection and a data connection.

Once an FTP session is opened, it remains active until either the client closes the connection or the data and control connections are idle longer than the idle timeout period. The default is 270 seconds for a data connection and 900 seconds for a control connection. You can set the idle timeout using various TCP/IP configuration tools, such as BOOTP/TFTP, Telnet, the printer control panel (see [TCP/IP configuration on page 14](#)), the HP Embedded Web Server (see [HP Embedded Web Server \(V.40.xx\) on page 64](#)), or management software.

Control connection

Using standard FTP, the client opens a control connection to the HP Jetdirect FTP server. Control connections exchange commands between the client and the FTP server. The HP Jetdirect print server supports up to four simultaneous control connections (or FTP sessions). If the number is exceeded, a service not available message is displayed.

FTP control connections use TCP port 21.

Data connection

A data connection is created each time a file is transferred between the client and the FTP server. The client controls the creation of a data connection by issuing the commands that require a data connection (such as FTP ls, dir or put commands).

Although the ls and dir commands are always accepted, the HP Jetdirect FTP server supports a single data connection for printing.

The transmission mode for an FTP data connection with the HP Jetdirect print server is always in stream mode, which marks the end-of-file by closing the data connection.


Once a data connection is established, the file transfer type (ASCII or binary) is specified. Clients attempt to auto-negotiate a transfer type. The default transfer type depends on the client system. For example, UNIX might default to binary. To specify the transfer type, enter the `bin` or `ascii` command at the FTP prompt.

FTP login

To start an FTP session, enter the following command from an MS-DOS or UNIX command prompt:
`ftp <ipaddress>`

In the example, `<ipaddress>` is the valid IP address or node name configured for the HP Jetdirect print server.

Figure B-1 FTP Login Example

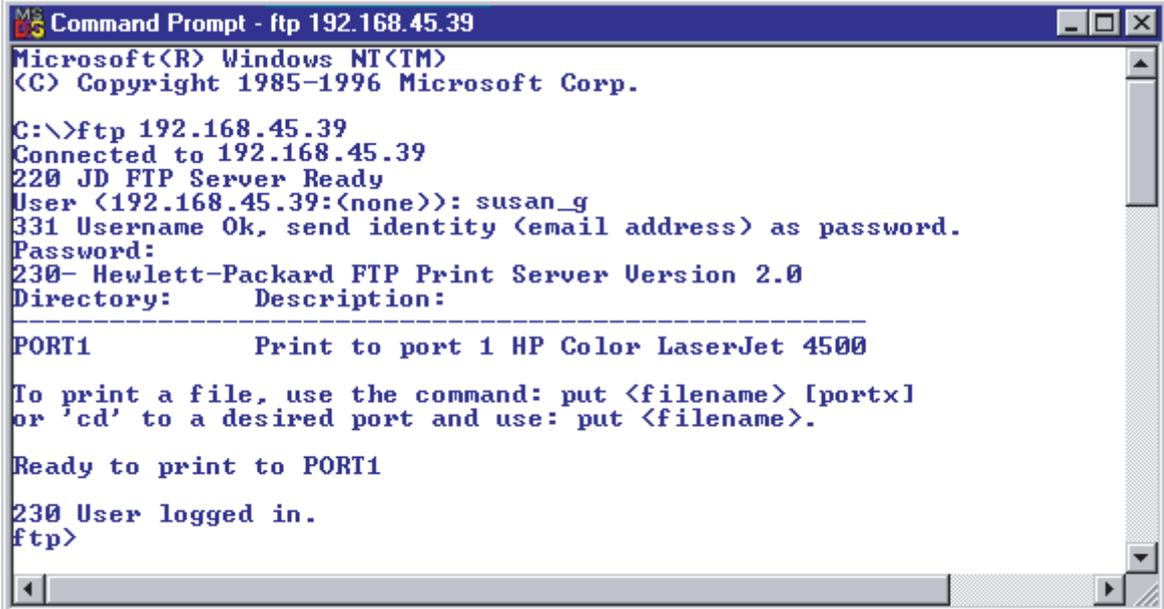

```
MS-DOS Command Prompt - ftp 192.168.45.39
Microsoft(R) Windows NT(TM)
(C) Copyright 1985-1996 Microsoft Corp.

C:\>ftp 192.168.45.39
Connected to 192.168.45.39
220 JD FTP Server Ready
User (192.168.45.39:(none)): susan_g
331 Username Ok, send identity (email address) as password.
Password:
230- Hewlett-Packard FTP Print Server Version 2.0
Directory:      Description:
-----
PORT1          Print to port 1 HP Color LaserJet 4500

To print a file, use the command: put <filename> [portx]
or 'cd' to a desired port and use: put <filename>.

Ready to print to PORT1

230 User logged in.
ftp>
```

If the connection succeeds, a Ready message is displayed.

You are then prompted for a login name and password. The default is the client's login name. The HP Jetdirect FTP server allows any user name, and passwords are ignored.

If login is successful, a message 230 is displayed on the client system. In addition, the available HP Jetdirect printing ports are displayed. Supported HP Jetdirect print servers provide a single port (Port 1). For a typical FTP printing session, see [Example FTP Session on page 176](#).

End the FTP session

To end an FTP session, type `quit` or `bye`.



NOTE: Before ending an FTP session, use a **Ctrl C** command to close the data connection.

Commands

The following table summarizes the available FTP printing session commands.

Table B-1 User commands for HP Jetdirect FTP server

Command	Description
<code>user <Username></code>	<Username> specifies a user. Any user is accepted and can print to the selected port.
<code>cd <port#></code>	Select a port number for printing. (On HP Embedded Web Server, only <code>port1</code> is available.)
<code>cd /</code>	Change to the root directory <code>/</code> of the HP Jetdirect FTP server.
<code>quit</code>	Terminate the FTP session with the printer server.
<code>bye</code>	
<code>dir</code>	Display the contents of the current directory. If entered in the root directory, a list of available printing ports is displayed.
<code>ls</code>	
<code>pwd</code>	Display the current directory or the current HP Jetdirect printing port.
<code>put <Filename></code>	File name (<Filename>) to send to the selected HP Jetdirect print server port (Port 1).
<code>bin</code>	Configure an FTP binary (image) file transfer.
<code>ascii</code>	Configure an FTP ASCII file transfer. HP Jetdirect print servers support only non-print format control for character transfers (standard values for spacing and margins are used).
Ctrl C	Abort the FTP service command and any transfer of data. The data connection is closed.
<code>rhelph remotehelp</code>	Display a list of FTP system commands supported by the print server. (Use <code>rhelph</code> on UNIX, or <code>remotehelp</code> on Windows Server 2003 and Server 2008.) These are not user commands. User-accessible commands depend on the client's FTP system.)

Example FTP Session

This is an example of a typical FTP printing session:

Figure B-2 FTP Session Example

```
C:\> ftp 192.168.45.39
Connected to 192.168.45.39.
220 JD FTP Server Ready
User <192.168.45.39:none>: susan_g
001 Username Ok, send identity <email address> as password
Password:
230- Hewlett-Packard FTP Print Server Version 2.0
Directory:          Description:
-----
PORT1              Print to port 1 HP color LaserJet 4500
```

To print a file, use the command: put <filename> [portx]
or cd to a desired port and use: put <filename>.

Ready to print to PORT1

```
230 User logged in.
ftp> pwd
257 "/" is current directory. <"default port is : /PORT1">
HP Color LaserJet 4500"
ftp> cd port1
250 Changed directory to "/PORT1"
ftp> pwd
257 "/PORT1" is current directory. "HP Color LaserJet 4500"
ftp> bin
200 Type set to I. Using binary mode to transfer files.
ftp> put d:\atlas\temp\ftp_test.ps
200 PORT command successful.
150 Opening BINARY mode data connection
226- Ready
226- Processing job
226 Transfer complete
31534 bytes sent in 0.04 seconds <788.35 Kbytes/sec>
ftp> quit
221 Goodbye
C:\>
```

C HP Jetdirect control panel menus (V.40.xx)

The configuration menu for the HP Jetdirect EIO and embedded print servers is accessed from the printer's control panel. The steps to access this menu from the printer control panel depend on the printer. See the printer guide, or print a control panel menu map for more information.

The available HP Jetdirect menus depend on the type of control panel, either Graphical or Classic.

Graphical control panel menus

Newer printer/MFP devices support graphical control panels, which can consist of a numeric keypad, navigation buttons, and touch-screen displays.

For HP Jetdirect menus, graphical control panels typically display 18 characters on a line, and as many as four lines at a time. Scroll support allows display of additional lines.

NOTE: These menus apply to printers/MFPs with an HP Jetdirect embedded print server, or that contain a EIO slot in which an HP Jetdirect EIO print server is installed. The displayed menu items depend on the features supported by the print server.

Figure C-1 Example of Graphical Control Panel

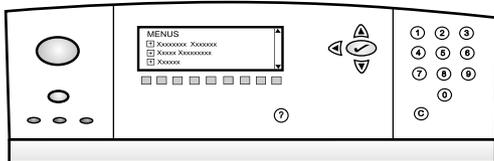


Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel

Menu item	Sub-menu item	Sub-menu item	Values and Description
TCP/IP	Enable		Off: Disable the TCP/IP protocol. On (default): Enable the TCP/IP protocol.
	Host Name		An alphanumeric string (up to 32 characters), identifying the device. The default is NPIxxxxxx, where xxxxxx is the last six digits of the LAN hardware (MAC) address.

Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel (continued)

Menu item	Sub-menu item	Sub-menu item	Values and Description
	IPv4 Settings	Config Method	<p>How TCP/IPv4 parameters are configured on the HP Jetdirect print server.</p> <p>BootP: Automatic configuration from a BootP server.</p> <p>DHCP (default): Automatic configuration from a DHCPv4 server. If a DHCP lease exists, use the DHCP Release and DHCP Renew menus to set DHCP lease options.</p> <p>Auto IP: Automatic link-local IPv4 addressing. An address in the form 169.254.x.x is assigned automatically.</p> <p>Manual: Manually configure TCP/IP4, using the Manual Settings menu.</p>
		DHCP Release	<p>Displays if Config Method is set to DHCP and a DHCP lease exists for the print server.</p> <p>No (default): Current DHCP lease is saved.</p> <p>Yes: Current DHCP lease and the leased IP address are released.</p>
	DHCP Renew		<p>Displays if Config Method is set to DHCP and a DHCP lease exists for the print server.</p> <p>No (default): Print server does not request to renew the DHCP lease.</p> <p>Yes: Print server requests to renew the current DHCP lease.</p>
		Manual Settings	<p>Available if Config Method is set to Manual. You can set the following from the printer control panel:</p> <p>IP Address: Printer IP address.</p> <p>Subnet Mask: Printer subnet mask.</p> <p>Syslog Server: IP address of the syslog server used to receive and log syslog messages.</p> <p>Default Gateway: IP address of the gateway or router used for communications with other networks.</p> <p>Idle Timeout: Time, in seconds, after which an idle TCP print data connection is closed.</p>
		Default IP	<p>Default IP address to use if the print server is unable to obtain an IP address from the network during a forced TCP/IP reconfiguration. (For example, when manually configured to use BootP or DHCP.)</p> <p>Auto IP: Link-local IP address 169.254.x.x is set.</p> <p>Legacy: 192.0.0.192 is set, consistent with older HP Jetdirect devices.</p>

Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel (continued)

Menu item	Sub-menu item	Sub-menu item	Values and Description
		Primary DNS	<p>IP address (n.n.n.n) of a primary DNS server.</p> <p>NOTE: Displays only if Manual configuration is a higher priority than DHCP in the Config Precedence table, when configured through the HP Embedded Web Server.</p>
		Secondary DNS	<p>IP address (n.n.n.n) of a secondary DNS server.</p> <p>NOTE: Displays only if Manual configuration is a higher priority than DHCP in the Config Precedence table, when configured through the HP Embedded Web Server.</p>
	IPv6 Settings	Enable	<p>IPv6 operation on the print server.</p> <p>Off: Disable IPv6.</p> <p>On (default): Enable IPv6.</p>
		Address	<p>Manually configure an IPv6 address.</p> <p>Manual Settings: Manually configure a TCP/ IPv6 address.</p> <p>Enable: Enable (On) or disable (Off) manual configuration.</p> <p>Address: IPv6 node address (32 hexadecimal digits).</p>
		DHCPv6 Policy	<p>Router Specified: Router determines the stateful auto-configuration method used by the print server. The print server obtains its address, its configuration information, or both from a DHCPv6 server.</p> <p>Router Unavailable: If a router is not available, the print server obtains its stateful configuration from a DHCPv6 server.</p> <p>Always: Print server always attempts to obtain its stateful configuration from a DHCPv6 server.</p>
		Primary DNS	<p>IPv6 address of the primary DNS server the print server uses.</p> <p>NOTE: Displays only if Manual configuration is a higher priority than DHCP in the Config Precedence table, when configured using the HP Embedded Web Server.</p>
		Secondary DNS	<p>IPv6 address for a secondary DNS server that the print server uses.</p> <p>NOTE: Displays only if Manual configuration is a higher priority than DHCP in the Config Precedence table, when configured using the HP Embedded Web Server.</p>

Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel (continued)

Menu item	Sub-menu item	Sub-menu item	Values and Description
	Proxy Server		<p>Proxy server to use by embedded applications in the device. A proxy server is typically used by network clients for Internet access. The proxy server caches Web pages and provides a degree of Internet security.</p> <p>Enter its IPv4 address or FQDN (up to 255 octets).</p> <p>Contact your ISP for the proxy server address, when required.</p>
	Proxy Port		<p>Port number used by the proxy server for client support. This port is reserved for proxy activity on your network, and can be a value from 0 to 65535.</p>
IPX/SPX	Enable		<p>Off: Disable the IPX/SPX protocol.</p> <p>On: Enable the IPX/SPX protocol.</p> <p>NOTE: The factory default setting depends on the print server model.</p>
	Frame Type		<p>Frame-type setting for your network.</p> <p>Auto: Sense all types and configure the first one detected.</p> <p>EN_8023, EN_II, EN_8022, and EN_SNAP: Frame-type selections for Ethernet networks</p>
AppleTalk	Enable		<p>Off: Disable the AppleTalk protocol.</p> <p>On: Enable the AppleTalk protocol.</p> <p>NOTE: The factory default setting depends on the print server model.</p>
DLC/LLC	Enable		<p>Off: Disable the DLC/LLC protocol.</p> <p>On: Enable the DLC/LLC protocol.</p> <p>NOTE: The factory default setting depends on the print server model.</p>
Security	Print Sec Page		<p>Yes: Print the current IPsec security settings.</p> <p>No (default): Do not print the current settings..</p> <p>NOTE: Displays only if IPsec is supported on the print server.</p>
	Secure Web		<p>Require encrypted communication between a browser and the HP Embedded Web Server.</p> <p>HTTPS Required: Only HTTPS access is accepted. The print server appears as a secure site.</p> <p>HTTP/HTTPS Optional: Access using either HTTP or HTTPS.</p> <p>NOTE: The factory default setting depends on the print server model.</p>

Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel (continued)

Menu item	Sub-menu item	Sub-menu item	Values and Description
	IPsec or Firewall		Specify the IPsec or Firewall status on the print server. Keep: Retain IPsec/Firewall configuration. Disable: Disable IPsec/Firewall operation on the print server. NOTE: Displays IPsec if the print server supports both IPsec and Firewall. Displays Firewall if the print server does not support IPsec..
	Reset Security		Reset security settings on the print server to factory defaults. No (default): Retain current security settings. Yes: Reset security settings to factory defaults.
	802.1X		Reset 802.1X settings on the print server to factory defaults. No (default): Retain current 802.1X settings. Yes: Reset 802.1X settings to factory defaults.
	Code Verification		Yes (default): Perform verification of the integrity and authenticity of the encrypted firmware upgrade image before installation. If an error is detected by the download manager, the configuration page displays a code verification error. No: Do not perform verification of the firmware upgrade image.
	Enable Wipe		Most configuration settings are erased during a cold reset. However, you can indicate whether to also erase stored digital certificates. Yes: Erase all stored digital certificates during a cold reset. No (default): Do not erase stored digital certificates during a cold reset.
	Login Security		Keep Reset
	Assessment		Keep Disable

Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel (continued)

Menu item	Sub-menu item	Sub-menu item	Values and Description
Diagnostics	Embedded Tests		<p>(HP Jetdirect embedded print servers only.) Diagnose network hardware or TCP/IP network connection problems.</p> <p>Use an embedded test to check hardware and communication paths on the print server. After you select and enable a test and set the execution time, select Execute to initiate the test.</p> <p>Depending on the execution time, a selected test runs continuously until either the device is turned off, or an error occurs and a diagnostic page is printed.</p>
		LAN HW Test	<p>CAUTION: Running this embedded test erases your TCP/IP configuration.</p> <p>Performs an internal loopback test, which sends and receives packets only on the internal network hardware. There are no external transmissions.</p> <p>Yes: Select this test.</p> <p>No: Do not select this test.</p>
		HTTP Test	<p>Check operation of HTTP by retrieving predefined pages from the device, and test the HP Embedded Web Server.</p> <p>Yes: Select this test.</p> <p>No: Do not select this test.</p>
		SNMP Test	<p>Checks operation of SNMP communications by accessing predefined SNMP objects on the device.</p> <p>Yes: Select this test.</p> <p>No: Do not select this test.</p>
		Data Path Test	<p>Identify data path and corruption problems on an HP postscript level 3 emulation device. Sends a predefined PS file to the device. However, the file does not print (paperless).</p> <p>Yes: Select this test.</p> <p>No: Do not select this test.</p>
		Select All Tests	<p>Run all the embedded tests.</p> <p>Yes: Run all tests.</p> <p>No: Do not run all tests.</p>
		Execution Time [H]	<p>Specify the length of time (in hours) that an embedded test runs, using a value from 1 to 60. If you select zero (0), the test runs indefinitely until an error occurs or the device is turned off.</p> <p>Data gathered from the HTTP, SNMP, and Data Path tests is printed after the tests complete.</p>

Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel (continued)

Menu item	Sub-menu item	Sub-menu item	Values and Description
		Execute	No (default): Do not run the selected tests. Yes: Run the selected tests.
	Ping Test		Test network communications. Sends link-level packets to a remote network host, then waits for an appropriate response.
		Dest Type	Target device is an IPv4 or IPv6 node.
		Dest IPv4	The IPv4 address.
		Dest IPv6	The IPv6 address.
		Packet Size	Size of each packet, in bytes, sent to the remote host. The minimum is 64 (default) and the maximum is 2048.
		Timeout	Length of time, in seconds, to wait for a response from the remote host. The default is 1 and the maximum is 100.
		Count	Number of ping test packets to send. Select a value from 1 to 100. Enter zero (0) to run the test continuously.
		Print Results	Print the test results (if not running continuously). Yes: Print the results. No (default): Do not print the results.
		Execute	Run the ping test. No (default): Do not run the test. Yes: Run the test
	Ping Results		View the ping test status and results, using the control panel display.
		Packets Sent	Number of packets (0 - 65535) sent to the remote host since the most recent test was initiated or completed.
		Packets Received	Number of packets (0 - 65535) received from the remote host since the most recent test was initiated or completed.
		Percent Lost	Percent of sent ping test packets without a response from the remote host since the most recent test was initiated or completed.
		RTT Min	Minimum detected round trip time (RTT), from 0 to 4096 milliseconds, for packet transmission and response.
		RTT Max	Shows the maximum detected round trip time (RTT), from 0 to 4096 milliseconds, for packet transmission and response.

Table C-1 HP Jetdirect EIO Menu on Graphical Control Panel (continued)

Menu item	Sub-menu item	Sub-menu item	Values and Description
		RTT Average	Average RTT, from 0 to 4096 milliseconds, for packet transmission and response.
		Ping in Progress	Yes a test is in progress. No a test completed or is not running.
		Refresh	Update the ping test data with current results. Yes: Update the data. No: Maintain the existing data. (Automatically refreshes when the menu times out or you manually return to the main menu.)
Link Speed			Set the print server's link speed. The available settings depend on the device and installed print server. Select one of the following modes: Auto (default): Use auto-negotiation to configure the highest link speed and communication mode allowed. If auto-negotiation fails, either 100TX HALF or 10TX HALF is set depending on the detected link speed of the hub/switch port. (A 1000T half-duplex selection is not supported.) 10T Half: 10 Mbps, half-duplex operation. 10T Full: 10 Mbps, full-duplex operation. 100TX Half: 100 Mbps, half-duplex operation. 100TX Full: 100 Mbps, full-duplex operation. 100TX Auto: Limits auto-negotiation to a maximum link speed of 100 Mbps on 1000T networks. 1000TX Full: 1000 Mbps, full-duplex operation. CAUTION: Changing the link setting can cause the loss of network communication with the print server.
Print Protocols			Print a page that lists the configuration of the following protocols: IPX/SPX, Novell NetWare, AppleTalk, DLC/LLC.

Classic control panel EIO menus

Classic control panels are provided on older devices that support HP Jetdirect EIO print servers only. Classic control panels typically display two lines of 16 characters each. Use the available device keys to display and select HP Jetdirect settings. Typically, an asterisk (*) identifies the selected value.

Figure C-2 Example of Classic Control Panel



Table C-2 HP Jetdirect EIO Menu on Classic Control Panel

Menu Item	Description
CFG NETWORK	<p>Access the HP Jetdirect menu. You must set this to YES* each time you want to access the menu.</p> <p>NO (default): Bypass the HP Jetdirect menu.</p> <p>YES: Access the HP Jetdirect menu.</p>
TCP/IP	Enable the selected protocol stack.
IPX/SPX	ON : Enable the protocol.
DLC/LLC	OFF : Disable the protocol.
ATALK	<p>NOTE: The factory default setting depends on the print server model. On HP Jetdirect 635n print servers, all network protocols except TCP/IP are disabled by default..</p>
CFG TCP/IP	<p>Access the TCP/IP menu and set TCP/IP protocol parameters.</p> <p>NO (default): Bypass the TCP/IP menu.</p> <p>YES: Access the TCP/IP menu.</p> <ul style="list-style-type: none"> • BOOTP=YES* Enable IPv4 configuration by a BootP Server. • DHCP=YES* Enable IPv4 configuration by a DHCP Server. <p>If DHCP=YES* and the print server has a DHCP lease, you can configure the following DHCP settings:</p> <ul style="list-style-type: none"> ◦ RELEASE: Select whether to release (YES) or save (NO) the current lease. ◦ RENEW: Select whether to renew (YES or NO) the lease. <ul style="list-style-type: none"> • AUTO IP=YES* Automatically assign a link-local IPv4 address in the form 169.254.x.x.

Table C-2 HP Jetdirect EIO Menu on Classic Control Panel (continued)

Menu Item	Description
	<p>If you specify BOOTP=NO*, DHCP=NO* and AUTO IP=NO*, you can manually set the following TCP/IPv4 parameters from the control panel:</p> <ul style="list-style-type: none"> ◦ Each byte of the IPv4 address (IP) ◦ Subnet Mask (SM) ◦ Syslog Server (LG) ◦ Default Gateway (GW) ◦ Idle Timeout period (default is 270 seconds, 0 disables the timeout) ● CFG DNS 1=YES* IPv4 address of a primary DNS server (one byte at a time). ● CFG DNS 2=YES* IPv4 address of a secondary DNS server (one byte at a time). ● IPV6 = YES* Enable IPv6 operation. Select NO to disable IPv6 operation. ● POLICY=<option> Set one of the following IPv6 addressing policies: <ul style="list-style-type: none"> ◦ RTR_AV: (default) Stateful auto-configuration method is determined by a router. The router specifies whether the print server obtains its address, configuration information, or both from a DHCPv6 server. ◦ RTR_UN: Attempt to obtain stateful configuration from a DHCPv6 server (when a router is not available).. ◦ ALWAYS: Always attempt to obtain its stateful configuration from a DHCPv6 server (whether or not a router is available). ● MANUAL= KEEP/DISABLE Set the behavior of a manually configured IPv6 address detected on the print server. <ul style="list-style-type: none"> ◦ KEEP (default): Maintain the address in an active state. ◦ DISABLE: Maintain the address but in an inactive state. <p>Print an HP Jetdirect configuration page to verify your settings. (The print server can overwrite selected parameters with values that ensure proper operation.)</p>
CFG IPX/SPX	<p>Access the IPX/SPX menu and set protocol parameters.</p> <p>NO (default): Bypass the menu.</p> <p>YES: Access the menu.</p> <p>Using this menu, you can specify the Frame Type parameter used on your network.</p> <ul style="list-style-type: none"> ● AUTO (default) Automatically set the frame type to the first detected. ● For Ethernet cards, you can select EN_8023, EN_II, EN_8022, EN_SNAP.
WEB	<p>HP Embedded Web Server accepts communications using HTTPS (Secure HTTP) only, or both HTTP and HTTPS.</p> <p>HTTPS: Accept only HTTPS (print server appears as a secure site).</p> <p>HTTP/HTTPS: Accept either HTTP or HTTPS.</p>
SECURITY	<p>Reset current security settings to factory defaults.</p> <p>KEEP (default): Retain current security settings.</p> <p>RESET: Reset security settings to factory defaults.</p>

Table C-2 HP Jetdirect EIO Menu on Classic Control Panel (continued)

Menu Item	Description
IPSEC or FIREWALL	(Full featured print servers only) If the print server supports IPsec, IPSEC is displayed on the menu for both IPsec and Firewall status. If the print server does not support IPsec, Firewall is displayed. Specify the state of IPsec/Firewall on the print server. Disable IPsec/Firewall. KEEP (default): Retain IPsec/Firewall operation as configured. DISABLE : Disable IPsec/Firewall operation.
802.1X	KEEP (default): Retain current 802.1X settings. RESET : Reset 802.1X settings to factory defaults.
CODE VERIFICATION	YES (default): Perform verification of the integrity and authenticity of the encrypted firmware upgrade image before installation. If an error is detected by the download manager, the configuration page displays a code verification error. NO : Do not perform verification of the firmware upgrade image.
PRINT	Print a configuration page for the selected item. PROTOCOLS : Print IPX/SPX, Novell NetWare, AppleTalk, or DLC/LLC configuration. SECURITY : Print the current security settings.
CFG LINK	Manually configure the HP Jetdirect print server's network link. NO (default): Bypass the link configuration menu. YES : Access the link configuration menu. Set the link speed and communication mode. These must match the network. The available settings depend on the print server model. CAUTION : Changing the link setting can cause the loss of network communication with the print server. AUTO (default): Use auto-negotiation to set the highest link speed and communication mode allowed. If auto-negotiation fails, either 100TX HALF or 10TX HALF is set depending on the detected link speed of the hub/switch port. (A 1000T half-duplex selection is not supported.) 10T HALF : 10 Mbps, half-duplex operation. 10T FULL : 10 Mbps, Full-duplex operation. 100TX HALF : 100 Mbps, half-duplex operation. 100TX FULL : 100 Mbps, full-duplex operation. 100TX AUTO : Limits auto-negotiation to a maximum link speed of 100 Mbps. 1000 FULL : 1000 Mbps, full-duplex operation.

D Open source licensing statements

gSOAP

Part of the software embedded in, or supplied with, this product is gSOAP software. Portions created by gSOAP are Copyright © 2001-2004 Robert A. van Engelen, Genivia inc. All Rights Reserved.

THE SOFTWARE IN THIS PRODUCT WAS IN PART PROVIDED BY GENIVIA INC AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

OpenSSL

OpenSSL license

Copyright © 1998–2004 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment:
"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit.
(www.openssl.org/)"
4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.
5. Products derived from this software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project.
6. Redistributions of any form whatsoever must retain the following acknowledgment:
"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit
(www.openssl.org/)"

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

Original SSLeay license

Copyright © 1995–1998 Eric Young (eay@cryptsoft.com). All rights reserved.

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com). The implementation was written so as to conform with Netscape's SSL.

This library is free for commercial and non-commercial use as long as the following conditions are adhered to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com).

Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed.

If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used.

This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

"This product includes cryptographic software written by Eric Young (eay@cryptsoft.com)"

The word 'cryptographic' can be left out if the routines from the library being used are not cryptographic related.

4. If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement:

"This product includes software written by Tim Hudson (tjh@cryptsoft.com)"

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The license and distribution terms for any publicly available version or derivative of this code cannot be changed, i.e., this code cannot simply be copied and put under another distribution license [including the GNU Public License.]

Index

A

Access List
 Configuration page entry 143
 embedded Web server 98
 Security features 121
 Telnet configuration 50
 TFTP configuration file 29
Ad Hoc Mode
 embedded Web server 70
 Telnet 44
Administrator password
 embedded Web server 68, 94
 Printer synchronization 94
 Security features 121
 Telnet configuration 44
 TFTP configuration file 25
AH. *See* Authentication Header
AppleTalk
 Control panel menu 180, 185
 Name 150
 Network number 150
 Node number 150
 Status 149
 TFTP configuration 34
 TYPE 83, 150
 Zone 83, 150
arp command 40
ARP DUPLICATE IP ADDRESS 155
Assessment
 Configuration page entry 143
ATTACHED SERVER 149
Authentication
 802.1X 3
 Certificates 94
 IKEv1/IKEv2 117
 IPsec 114
 Kerberos 116
 SNMPv3 100
 Telnet 45
Authentication Header 118, 119
Auto IP
 Configuration page 146
 Control panel 178
 embedded Web server 76
 See also Default IP address

Auto-negotiation
 Link speed 34, 86, 184, 187

B

BAD BOOTP REPLY 156
BAD BOOTP TAG SIZE 156
BAD PACKETS RCVD 144
Banner page
 embedded Web server 79
 Telnet configuration 49
 TFTP configuration 28
Bonjour
 embedded Web
 server 76, 101
 Telnet 51
 TFTP 30
BOOTP
 embedded Web server 76
 Telnet configuration 47
 Using 21
BOOTP Server
 Configuration 22
 Identifying 146
BOOTP/DHCP IN
 PROGRESS 156
BOOTP/RARP IN
 PROGRESS 156
Browsers
 embedded web server 65
 HP Web Jetadmin 9

C

CA certificate
 embedded Web server 102
Cert Expires 142, 159
Certificate Authority. *See* CA
 certificate
Certificates
 Validity period 96
channel
 wireless
 communications 46, 70
Clock skew 117
Cold reset 125

Communication Mode
 Telnet 44
Community name
 Configuration page 143
 embedded Web server 84
 Security features 122
 Telnet 55
 TFTP configuration 33
CONFIG BY 146
Configuration
 HP Web Jetadmin 10
 LPD printing 163
 Software solutions 7
 TCP/IP networks 18
 Telnet commands 43
 TFTP parameters 25
configuration
 wireless 69
CONFIGURATION ERROR 152
Configuration page
 embedded Web server 104
 Printing 128
Configuration page messages
 AppleTalk 149
 DLC/LLC 150
 Error Messages 150
 General messages 137
 IPX/SPX 148
 Novell NetWare 148
 Security page 158
 TCP/IP 144
 TCP/IPv4 145
 TCP/IPv6 147
 USB 138
configuration page messages
 802.11 wireless 139
Control panel
 configuration 62, 177

D

DATE MANUFACTURED 138
Default gateway
 Bootptab file 23
 Control panel menu 178

- embedded Web server 77
 - Telnet configuration 48
 - See also Gateway
- Default IP address 18
- Defaults. See Factory defaults
- Deprecated template 160
- DHCP Server, identifying 146
- DHCP(IPv4)
 - Control panel 178, 185
 - Enabling or disabling 38
 - Telnet configuration 47
 - Using 36
- Diagnostic menu
 - Control panel 182
- Diffie-Hellman Groups 118
- DLC/LLC
 - Configuration messages 150
 - Control panel menu 180, 185
 - embedded Web server 83
 - TFTP configuration 34
- DNS server
 - Boot file tag 23
 - Control panel 179
 - embedded Web server 75
 - Printer control panel 179
 - Telnet configuration 48
 - TFTP configuration 27
- Domain name
 - Boot file tag 23
 - embedded Web server 75
 - Telnet configuration 48
 - TFTP configuration 27

E

- EAP
 - Certificates 95
 - EAP-TLS 3, 102
- embedded Web server
 - HP Web Jetadmin 65
 - HTTPS security 99, 121
 - LPD setup 87
 - NetWare objects 67
 - TFTP configuration file 31
 - Upgrading firmware 87
 - Using 64
 - Viewing 65
 - Web browsers 65
- Encapsulating Security
 - Payload 118, 119

- Encryption
 - 802.1X 101
 - HTTPS 99
 - IKEv1/IKEv2 117
 - IPsec 114
 - SNMP v3 100
- Error messages
 - HP Jetdirect configuration
 - page 135
 - Printer control panel 129
- error messages
 - 802.11 wireless 140
- ESP. See Encapsulating Security
 - Payload

F

- Factory defaults, resetting
 - Cold reset 125
 - Security
 - parameters 26, 44, 93, 181, 186
 - TCP/IP from Telnet 61
- factory defaults, resetting
 - wireless parameters 69
- Failsafe 107
- Firewall
 - Control panel menu 181
 - embedded Web server 105
- FIRMWARE REVISION 138
- Firmware upgrades
 - embedded Web server 87
 - Obtaining 5
 - TFTP configuration 35
- Flow control 58
- FRAME TYPE 148
- FTP printing
 - Commands 175
 - Example 176
 - Exiting 175
 - Introduction 173
 - TFTP configuration 28
- Fully Qualified Domain Name (FQDN)
 - Certificates 97
 - embedded Web server 66, 74
 - Kerberos 116
 - Telnet configuration 48

G

- Gateway
 - Bootptab file 23
 - Control panel menu 178
 - embedded Web server 77
 - Telnet configuration 48

H

- Hardware address
 - arp command 40
 - Bootptab file 23
 - Default EAP/802.1X user
 - name 102
 - Default host
 - name 47, 52, 68, 76, 177
 - Default NetWare printer
 - name 82
 - embedded Web server 68
 - Identifying 138
 - LPD printing 164
 - RARP(IPv4) 39
- Host Access List. See Access List
- Host name
 - BOOTP tag 23
 - embedded Web server 74, 75
 - Telnet 47
 - TFTP file 26
- HP Jetdirect
 - Cold reset 125
 - Configuration page
 - messages 137
 - Configuration page, how to
 - print 128
 - Control panel menu 62, 177
 - Error messages 150
 - Network statistics 142, 144
 - Supported print servers 1
 - wireless settings 139
- HP Support, Online 5
- HP Web Jetadmin
 - Installing 9
 - Recommended version 65
 - Removing 10
- HTTPS
 - Configuration page 143, 160
 - Control panel menu 186
 - embedded Web server 66, 99
 - Telnet 44
 - TFTP 26

I
 I/O Card, status message 138
 Idle timeout
 Current setting 145
 embedded Web server 79
 Telnet 52
 TFTP configuration file 31
 IEEE 802.1X
 Configuration 101
 Infrastructure Mode
 Telnet 44
 INIT message 130
 Internet Key Exchange
 IPsec settings 117
 Internet Key Exchange (IKE)
 Authentication type 114
 IPsec settings 117, 118
 Internet Printer Connection software
 Introduction 10
 Internet Printing Protocol. *See* IPP
 IP address
 Bootptab file 23
 Default 18
 embedded Web server 65, 77
 Erasing through Telnet 61
 Printer control panel 62
 Resetting 125
 IPP
 Internet printing protocol 8, 10
 TFTP configuration 28
 IPsec
 Configuration limitations 109
 Control panel menu 181
 embedded Web server 103, 105
 Telnet 47
 Templates 113
 IPv4
 Configuration 17
 Configuration page 145
 embedded Web server 76
 IPv6 settings
 Configuration 14
 Configuration page 147
 embedded Web server 77
 Printer control panel 179
 Status message 147
 IPX/SPX
 Control panel menu 180, 185

 Status message 148
 TFTP configuration 33
J
 Jetdirect certificate 95
K
 KDC. *See* Key Distribution Center
 Kerberos
 Configuration 115, 116
 Key Distribution Center 116
L
 LAN ERROR
 BABBLE 151
 CONTROLLER CHIP 151
 EXTERNAL LOOPBACK 150
 INFINITE DEFERRAL 151
 INTERNAL LOOPBACK 150
 LOSS OF CARRIER 151
 NO LINKBEAT 151
 NO SQE 151
 RECEIVER OFF 151
 RETRY FAULTS 151
 TRANSMITTER OFF 151
 UNDERFLOW 151
 Lightweight Extensible
 Authentication Protocol
 SEE LEAP 3
 Link configuration
 Control panel 184, 187
 embedded Web server 86
 Telnet 59
 TFTP 34
 Locally administered address
 (LAA) 58, 68, 86, 138
 LPD (Line Printer Daemon). *See* LPD
 printing
 LPD printing
 Setup overview 164
 TFTP configuration 28
 UNIX 165
 Windows Server
 2003/2008 168
 LPD Queues
 embedded Web server 87
 Telnet 50
 User defined 87, 165

M
 MAC address. *See* Hardware
 address
 Mac OS solutions
 Verifying configuration 13
 Manufacturing ID 138
 Messages
 AppleTalk 149
 DLC/LLC 150
 Errors 150
 General 137
 HP Jetdirect configuration
 page 135
 IPX/SPX 147
 TCP/IP 144
 messages
 802.11 wireless 139
 Model number
 Configuration page 138
 Product list 1
N
 NDS
 Context 149
 TREE NAME 149
 NETWARE MODE 149
 Network
 Configuration page 135
 Error messages 150
 HP software solutions 7
 Protocols 184
 Security settings 142, 180
 Statistical parameters 144
 Supported protocols 2
 Network Name (SSID)
 embedded Web server 70
 Telnet configuration 44
 NIS (Network Information
 Service) 22
 NO QUEUE ASSIGNED 152
 NODE NAME 149
 Novell NetWare
 Configuration page 148
 embedded web server 67
 Error messages 150
 Status 148
 NOVRAM ERROR 155

- - Open System authentication
 - Telnet 45
 - OUT OF BUFFERS 154
- P**
 - PACKETS TRANSMITTED 144
 - passphrase 45
 - PASSWORD ERROR 152
 - Password, administrator
 - Printer synchronization 94
 - Web Jetadmin
 - synchronization 94
 - PEAP 3, 102
 - PEM (Privacy Enhanced Mail) 97
 - Perfect Forward Secrecy 118
 - PFS. *See* Perfect Forward Secrecy
 - Ping
 - Control panel test 183
 - Ping(IPv4) command
 - With arp command 40
 - PORT SELECT 138
 - POSTSCRIPT MODE NOT SELECTED 156
 - Pre-Shared Key
 - Telnet 45
 - Pre-shared key 115
 - Primary Frame Type 148
 - Print queue
 - BSD systems 165
 - LPD 50, 164
 - SAM (HP-UX) systems 166
 - PRINT SERVER NOT DEFINED 152
 - Print servers
 - Supported 1
 - Printcap file 165
 - Printer control panel 62, 177
 - PRINTER NUMBER IN USE 152
 - PRINTER NUMBER NOT DEFINED 152
 - Protected Extensible Authentication Protocol. *See* PEAP
 - Protocols
 - Control panel menu 177
 - embedded Web server 85, 99
 - Telnet configuration 43
 - TFTP configuration 33
- Proxy server
 - embedded Web server 80
 - Printer control panel 180
- PSK. *See* Pre-shared key
- Q**
 - Queue names
 - LPD printing 50, 88, 165
 - Queue poll interval
 - Telnet 56
 - TFTP 34
- R**
 - RARP(IPv4)
 - Identifying the server 146
 - Using 39
 - RCFG (NetWare) 93, 101
 - Refresh rate
 - embedded Web server 90
 - Telnet web-refresh 32, 53
 - Replay detection 118
 - Reset security
 - Control panel 181, 186
 - embedded Web server 93
 - Telnet 44
 - TFTP 26
 - Resetting to factory defaults 125
 - Rules, IPsec policy
 - Configuration limits 109
- S**
 - SA. *See* Security Association
 - SAM (HP-UX) print queues 166
 - SAP Interval 149
 - SCANNING FOR SSID 151
 - Secure Web
 - Configuration page entry 160
 - embedded Web server 99
 - Telnet configuration 44
 - TFTP configuration 26
 - Secure Web Configuration
 - Configuration page entry 143
 - Security
 - Network settings 180
 - Printer control panel 63
 - Security Associations
 - SA lifetime setting 118
 - Security configuration
 - page 162
 - Security features 121
 - Security Parameters Index (SPI) 119
 - Service Location Protocol (SLP)
 - embedded Web server 101
 - Telnet 51
 - TFTP configuration 30
 - Services, IPsec
 - Configuration limits 109
 - Simple Network Time Protocol (SNTP) 116, 117
 - SNMP
 - Configuration page entry 143
 - embedded Web server 99
 - Telnet configuration 55
 - TFTP configuration 32
 - SNMP get community name
 - embedded Web server 84
 - TFTP configuration 33
 - See also* Community name
 - SNMP set community name
 - Configuration page 143
 - embedded Web server 84
 - Security features 122
 - Telnet configuration 55
 - TFTP configuration 33
 - See also* Community name
 - SNMP v3
 - embedded Web server 84
 - HP Web Jetadmin 65
 - speed, USB 59, 90
 - SPI. *See* Security Parameters Index
 - SSID (Service Set Identifier)
 - embedded Web server 70
 - Telnet configuration 44
 - Stateful IPv6 address 16
 - Stateless IPv6 address 15
 - Status
 - 802.11 wireless 140
 - AppleTalk 149
 - General 138
 - IPX/SPX 148
 - TCP/IPv4 145
 - TCP/IPv6 147
 - Subnet mask
 - Bootptab file parameter 23
 - TFTP host access list 29
 - Windows configuration 37
 - Supported network protocols 2
 - Syslog parameters
 - embedded Web server 81

- Telnet configuration 50
- TFTP configuration 29
- Syslog server
 - Bootptab file parameter 23

T

- TCP/IP
 - Configuration methods 14
 - Configuration page 144
 - Control panel menu 177, 185
 - embedded Web server 74
 - LPD setup 164
 - STATUS message 140
 - Telnet configuration 47
 - TFTP configuration 26
- Telnet (IPv4)
 - Command line configuration 43
 - Erasing the IP address 61
 - Security control 122
 - Using 41
- Templates, IPsec
 - Configuration limits 109
- Tests
 - Network 182
- TFTP
 - BOOTP 21
 - Configuration file 24
 - DHCP(IPv4) 36
 - Server 22, 146
- TFTP (Trivial File Transfer Protocol).
See TFTP
- TOTAL PACKETS RCVD 144
- Transport Layer Security (TLS) 3
- Traps
 - Telnet 55
 - TFTP 33
- Troubleshooting
 - Cold reset the print server 126
 - Configuration page error messages 150
 - Disable the print server 126
 - Flow chart 127
- troubleshooting
 - wireless print servers 132

U

- UNICAST PACKETS RCVD 144
- UNIX (HP-UX and Solaris) networks,
LPD printing 163

- Upgrades, firmware. See Firmware
upgrades

- USB
 - Configuration page 138
 - embedded Web server 90
 - Speed setting 59, 90
 - Telnet configuration 59
 - TFTP configuration 35
- User Datagram Protocol (UDP)
 - Bonjour configuration 85, 101

V

- Validity period
 - Certificates 96

W

- Web Jetadmin URL
 - Configuration page entry 147
- WEP
 - Telnet configuration 46
- WINS server
 - Configuration page 145
 - DHCP(IPv4) 36
 - embedded Web server 76
 - Telnet 48
 - TFTP 27
- wireless connection setup
 - embedded Web server 69
 - Telnet 44
- wireless print servers
 - configuration page messages 139
 - default IP configuration 19
 - Telnet 44
 - troubleshooting 132

Z

- Zone, AppleTalk
 - embedded Web server 83
 - Telnet 57

