



User Guide

© Copyright 2017 HP Development Company, L.P.

HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Product notice

This guide describes features that are common to most models. Some features may not be available on your product. To access the latest user guide, go to <http://www.hp.com/support>, and select your country. Select **Find your product**, and then follow the on-screen instructions.

First Edition: July 2017

Document Part Number: 926258-001

About This Guide

This guide provides information on monitor features, setting up the monitor, using the software and technical specifications.

-
-  **WARNING!** Indicates a hazardous situation that, if not avoided, **could** result in death or serious injury.
 -  **CAUTION:** Indicates a hazardous situation that, if not avoided, **could** result in minor or moderate injury.
 -  **IMPORTANT:** Indicates information considered important but not hazard-related (for example, messages related to property damage). A notice alerts the user that failure to follow a procedure exactly as described could result in loss of data or in damage to hardware or software. Also contains essential information to explain a concept or to complete a task.
 -  **NOTE:** Contains additional information to emphasize or supplement important points of the main text.
 -  **TIP:** Provides helpful hints for completing a task.
-



This product incorporates HDMI technology.

Table of contents

1 Getting Started	1
Important safety information	1
Product features and components	2
Features	2
Rear and side components	3
Front bezel controls	5
Setting up the monitor	6
Installing the monitor stand	6
Connecting the cables	7
Adjusting the monitor	12
Turning on the monitor	14
Installing a security cable	15
Mounting the monitor	15
Removing the monitor stand	16
Attaching the VESA mounting bracket	17
2 Using the monitor	18
Software and utilities	18
The Information file	18
The Image Color Matching file	18
Installing the INF and ICM files	18
Installing from the optical disc (available in select regions)	18
Downloading from the web	18
Using the on-screen display (OSD) menu	19
Assigning the function buttons	20
Camera	21
Using Auto-Sleep Mode	22
Adjusting Low Blue Light Mode	22
3 Support and troubleshooting	23
Solving common problems	23
Using the auto-adjustment function (analog input)	24
Optimizing image performance (analog input)	25
Button lockouts	26
Contacting support	26
Preparing to call technical support	26

Locating the serial number and product number	27
4 Maintaining the monitor	28
Maintenance guidelines	28
Cleaning the monitor	28
Shipping the monitor	28
Appendix A Technical specifications	29
60.5 cm/23.8-inch model	29
68.5 cm/27-inch model	30
Preset display resolutions	30
60.5 cm/23.8-inch and 68.5 cm/27-inch models	30
60.5 cm/23.8-inch and 68.5 cm/27-inch models	31
Entering user modes	31
Energy saver feature	31
Appendix B Accessibility	32
Supported assistive technologies	32
Contacting support	32

1 Getting Started

Important safety information

An AC power adapter and cord may be included with the monitor. If another cord is used, use only a power source and connection appropriate for this monitor. For information on the correct power cord set to use with the monitor, refer to the *Product Notices* provided on the optical disc or in your documentation kit.

 **WARNING!** To reduce the risk of electric shock or damage to the equipment:

- Plug the power cord into an AC outlet that is easily accessible at all times.
- Disconnect power from the computer by unplugging the power cord from the AC outlet.
- If provided with a 3-pin attachment plug on the power cord, plug the cord into a grounded (earthed) 3-pin outlet. Do not disable the power cord grounding pin, for example, by attaching a 2-pin adapter. The grounding pin is an important safety feature.

For your safety, do not place anything on power cords or cables. Arrange them so that no one may accidentally step on or trip over them. Do not pull on a cord or cable. When unplugging from the AC outlet, grasp the cord by the plug.

To reduce the risk of serious injury, read the *Safety & Comfort Guide*. It describes proper workstation setup, and proper posture, health, and work habits for computer users. The *Safety & Comfort Guide* also provides important electrical and mechanical safety information. The *Safety & Comfort Guide* is available on the Web at <http://www.hp.com/ergo>.

 **IMPORTANT:** For the protection of the monitor, as well as the computer, connect all power cords for the computer and its peripheral devices (such as a monitor, printer, scanner) to some form of surge protection device such as a power strip or uninterruptible power supply (UPS). Not all power strips provide surge protection; the power strips must be specifically labeled as having this capability. Use a power strip whose manufacturer offers a damage replacement policy so you can replace the equipment if surge protection fails.

Use the appropriate and correctly sized furniture designed to properly support your HP LCD monitor.

 **WARNING!** LCD monitors that are inappropriately situated on dressers, bookcases, shelves, desks, speakers, chests, or carts may fall over and cause personal injury.

Care should be taken to route all cords and cables connected to the LCD monitor so that they cannot be pulled, grabbed, or tripped over.

Be sure that the total ampere rating of the products connected to the AC outlet does not exceed the current rating of the outlet, and that the total ampere rating of the products connected to the cord does not exceed the rating of the cord. Look on the power label to determine the ampere rating (AMPS or A) for each device.

Install the monitor near an AC outlet that you can easily reach. Disconnect the monitor by grasping the plug firmly and pulling it from the AC outlet. Never disconnect the monitor by pulling the cord.

Do not drop the monitor or place it on an unstable surface.

 **NOTE:** This product is suitable for entertainment purposes. Consider placing the monitor in a controlled luminous environment to avoid interference from surrounding light and bright surfaces that may cause disturbing reflections from the screen.

Product features and components

Features

This guide describes features of the following monitors:

- 60.5 cm (23.8-inch) diagonal viewable screen area with 1920 x 1080 resolution, plus full-screen support for lower resolutions; includes custom scaling for maximum image size while preserving original aspect ratio
- 68.5 cm (27-inch) diagonal viewable screen area with 1920 x 1080 resolution, plus full-screen support for lower resolutions; includes custom scaling for maximum image size while preserving original aspect ratio


The monitor features include the following:

- Nonglare panel with an LED backlight
- Skype for Business–certified popup camera and microphone for online collaboration (select models)
- Wide viewing angle to allow viewing from a sitting or standing position, or when moving from side to side
- Tilt capability
- Pivot capability to rotate the monitor panel from landscape to portrait mode
- Swivel and height adjustment capabilities
- Removable stand for flexible monitor panel mounting solutions
- DisplayPort and VGA video inputs (cables provided)
- One HDMI (High-Definition Multimedia Interface) video input (cable not provided)
- USB 3.0 hub with one upstream port (connects to the computer) and two downstream ports (connect to USB devices)
- USB BM to AM cable provided to connect the monitor's USB hub to the USB connector on the computer (23.8-inch model only)
- USB CM to AM cable provided to connect the monitor's USB hub to the USB connector on the computer (27-inch model only)
- Plug and Play capability, if supported by your operating system
- Security cable slot provision on rear of monitor for optional security cable
- On-screen display (OSD) adjustments in several languages for easy setup and screen optimization
- HP Display Assistant software for adjusting monitor settings and enabling the theft deterrence features
- Cyberlink YouCam software
- HDCP (High-bandwidth Digital Content Protection) copy protection on all digital inputs
- Software and documentation optical disc (provided with the monitor in select regions) that includes monitor drivers and product documentation
- Energy saver feature to meet requirements for reduced power consumption




NOTE: For safety and regulatory information, refer to the *Product Notices* provided on your optical disc, if one is included, or in your documentation kit. To locate updates to the user guide for your product, go to <http://www.hp.com/support>. Select **Find your product**, and then follow the on-screen instructions.

Rear and side components

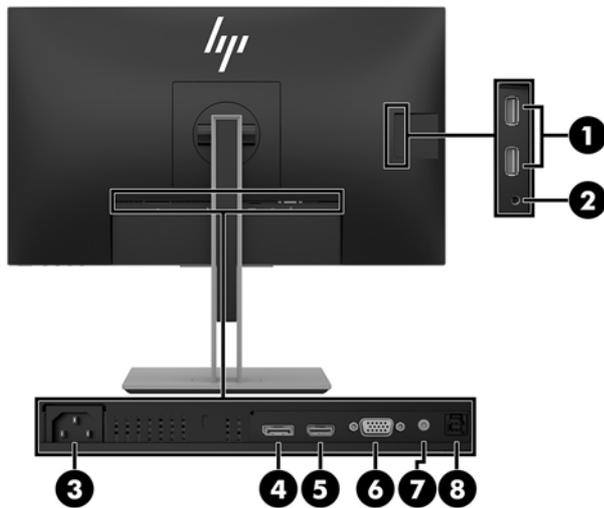

23.8-inch model


Component	Function
1 USB ports (2)	Connect USB devices.
2 Audio-out (headphone) jack	Connects optional powered stereo speakers, headphones, earbuds, a headset, or a television audio cable. WARNING! To reduce the risk of personal injury, reduce the volume before using headphones, earbuds, or a headset. For additional safety information, see the <i>Product Notices</i> provided on the optical disc, if one is included with your product. NOTE: When a device is connected to the headphone jack, the monitor speakers are disabled.
3 Power connector	Connects the power cord.
4 DisplayPort port	Connects the DisplayPort cable to the source device.
5 HDMI port	Connects the HDMI cable to the source device.
6 VGA port	Connects the VGA cable to the source device.
7 Audio line in port	Connects the audio cable to the monitor.
8 USB 3.0 upstream port	Connects the USB Type-B cable from the source device to the monitor.

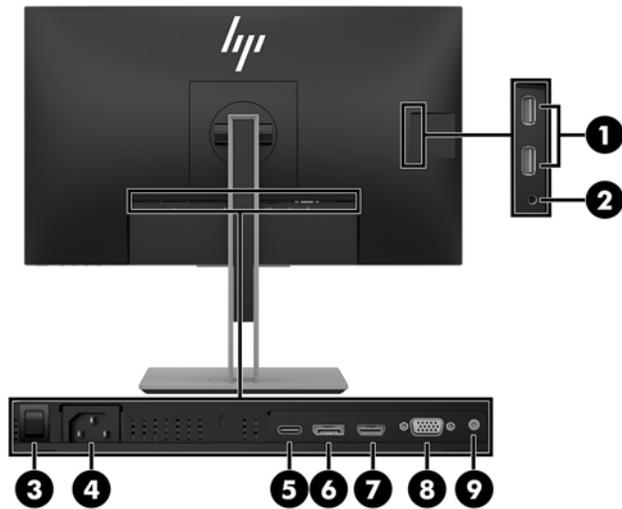

27-inch model

Component	Function
1 USB ports (2)	Connect USB devices.
2 Audio-out (headphone) jack	Connects optional powered stereo speakers, headphones, earbuds, a headset, or a television audio cable. WARNING! To reduce the risk of personal injury, reduce the volume before using headphones, earbuds, or a headset. For additional safety information, see the <i>Product Notices</i> provided on the optical disc, if one is included with your product. NOTE: When a device is connected to the headphone jack, the monitor speakers are disabled.
3 Master power switch	Turns off all power to the monitor. NOTE: Putting the switch in the Off position will yield the lowest power state for the monitor when not in use.
4 Power connector	Connects the power cord.
5 USB Type-C port	Connects the USB CM—CM or CM-AM cable from the source device to the monitor.
6 DisplayPort port	Connects the DisplayPort cable to the source device.
7 HDMI port	Connects the HDMI cable to the source device.
8 VGA port	Connects the VGA cable to the source device.
9 Audio line in port	Connects the audio cable to the monitor.

Front bezel controls

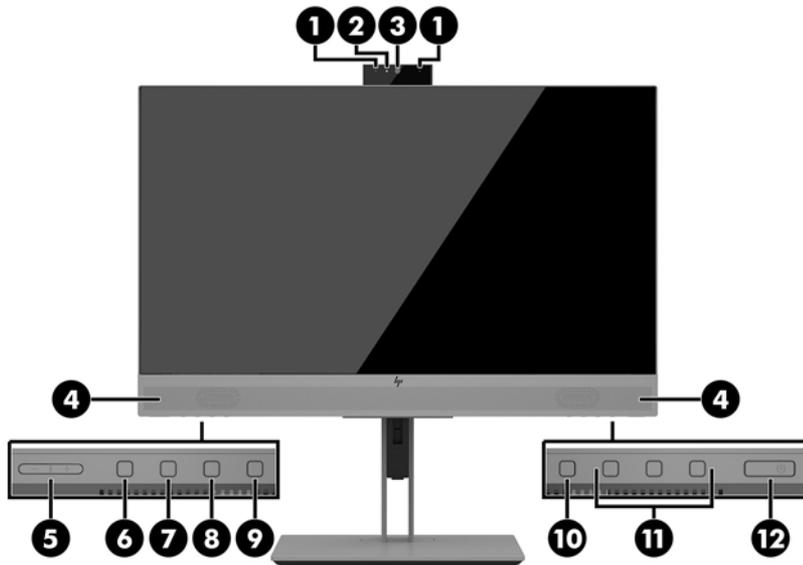

23.8-inch and 27-inch models

Component	Function
1	Camera microphones Allow you to participate in a video conference.
2	Camera light On: The camera is in use.
3	Camera lens Transmits your image in a video conference.
4	Speakers Transmit sound from audio input.
5	+/- (Plus/Minus) button Press to increase (+) or decrease (-) speaker volume.
6	Answer/Call button Press to answer or make a call. Illuminates green when on the phone. Green light and red light blink when there is an incoming call.
7	Mute microphone button Press to mute or activate the camera microphone. Illuminates amber when microphone is muted.
8	Mute speaker button Press to mute or activate the speakers. Illuminates amber when speakers are muted.
9	Reject/Hang up button Press to decline or end a call. Green light and red light blink when there is an incoming call.
10	Menu button Press to open the OSD menu, select a menu item from the OSD, or close the OSD menu. An indicator is activated above the Menu button when the OSD menu is open.
11	Function buttons Use these buttons to navigate through the OSD menu based on the indicators above the buttons that are activated when the OSD menu is open.

23.8-inch and 27-inch models

Component	Function
	NOTE: You can reconfigure the Function buttons in the OSD menu to quickly select the most commonly used operations. See Assigning the function buttons on page 20 for more information.
12 Power button	Press the button to turn the monitor on or off. When the monitor is on, the power light above the power button is on.



NOTE: To view an OSD menu simulator, visit the HP Customer Self Repair Services Media Library at <http://www.hp.com/go/sml>.


Setting up the monitor

Installing the monitor stand



IMPORTANT: To prevent damage to the monitor, do not touch the surface of the LCD panel. Pressure on the panel may cause nonuniformity of color or disorientation of the liquid crystals. If this occurs, the screen will not recover to its normal condition.

1. Position the monitor facedown on a flat surface covered by a clean, dry cloth.
2. Slide the top of the mounting plate on the stand under the upper lip of the recess in the back of the panel **(1)**.
3. Lower the bottom of the stand's mounting plate into the recess until it snaps into place **(2)**.
4. The latch pops up when the stand is locked in place.

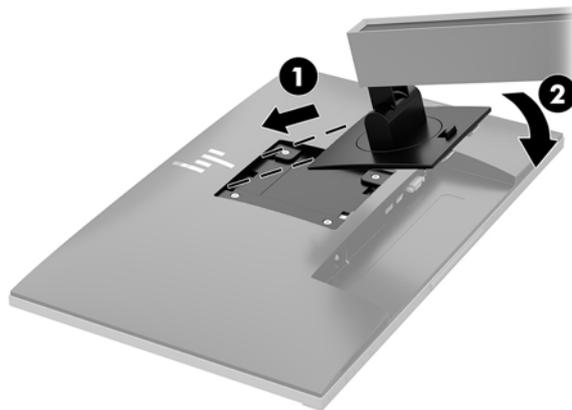

Connecting the cables

 **NOTE:** The monitor ships with select cables. Not all cables shown in this section are included with the monitor.


1. Place the monitor in a convenient, well-ventilated location near the computer.
2. Before connecting the cables, route the cables through the cable routing hole in the center of the stand.




3. Connect a video cable.

 **NOTE:** The monitor will automatically determine which inputs have valid video signals. The inputs can be selected by pressing the **Menu** button to access the on-screen display (OSD) menu and selecting **Input Control**.


- Connect one end of a VGA cable to the VGA connector on the rear of the monitor and the other end to the VGA connector on the source device.

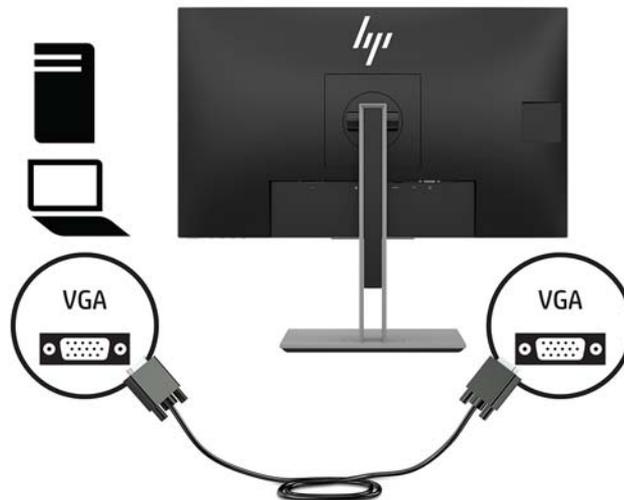

- Connect one end of a DisplayPort cable to the DisplayPort IN port on the rear of the monitor and the other end to the DisplayPort port on the source device.

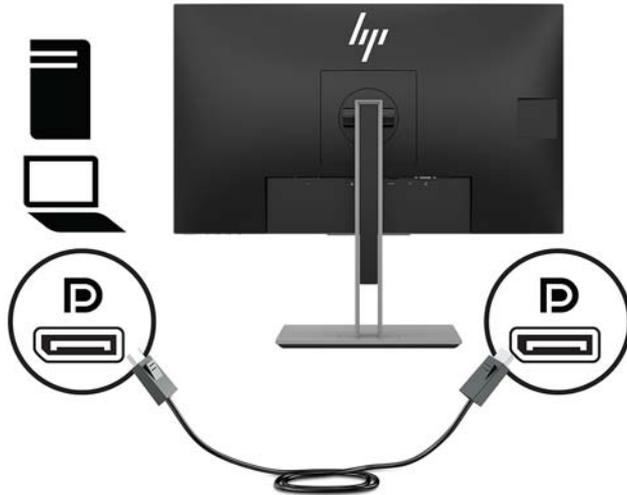


- Connect one end of an HDMI cable (not provided) to the HDMI port on the rear of the monitor and the other end to the HDMI port on the source device.

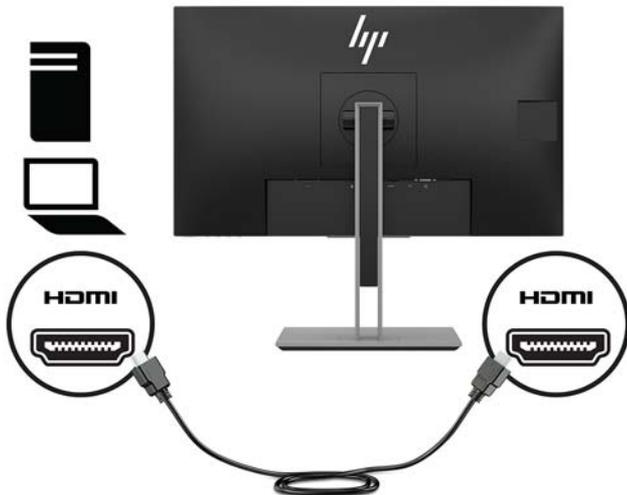


4. Connect a USB CM to CM cable (not provided) to the Type C USB port. Then connect the Type M-connector to the USB downstream port on the source device.


 **NOTE:** The USB CM to CM cable provides power delivery up to 15 W (5 V, 3 A).

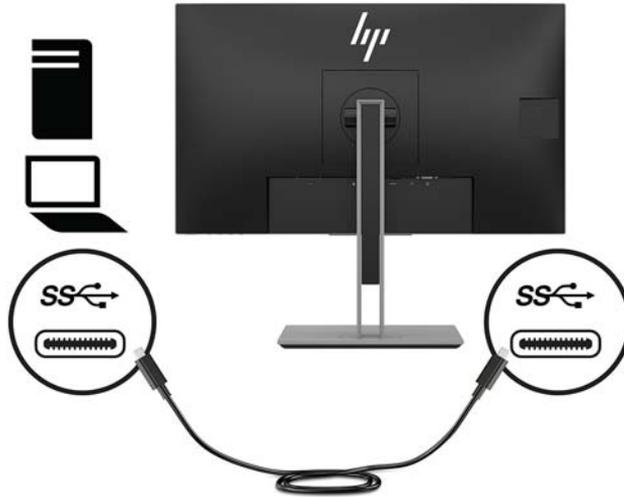


5. Connect a cable to the USB upstream port on the rear of the monitor (provides data transaction to display USB Type-A ports).
 - Connect the Type-C connector of the USB upstream cable to the USB upstream port on the rear of the monitor. Then connect the cable's Type-A connector to the USB downstream port on the source device (27-inch model only).

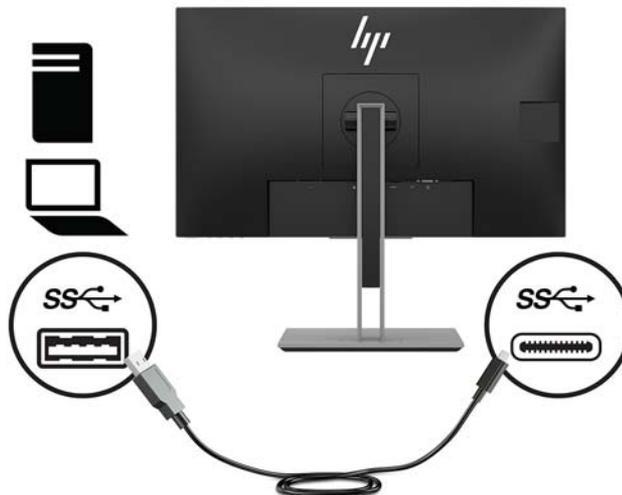


6. Connect the Type-B connector of the USB upstream cable to the USB upstream port on the rear of the monitor. Then connect the cable's Type A-connector to the USB downstream port on the source device. (23.8-inch model only)

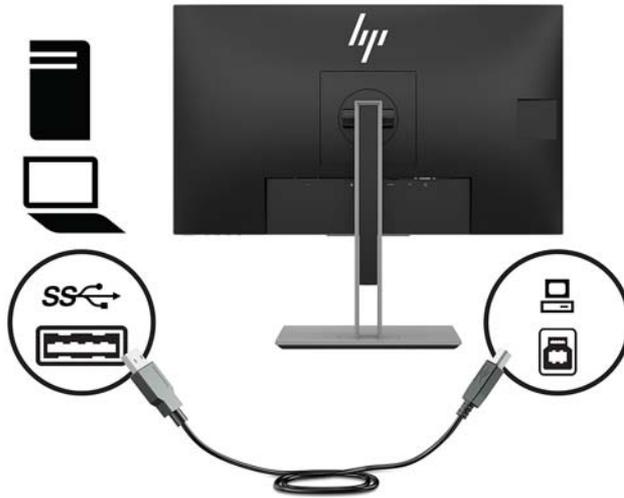

7. To enable sound from the monitor's speakers, connect one end of an audio cable (not included with the monitor) to the audio-in jack on the monitor and the other end to the audio-out jack on the source device.

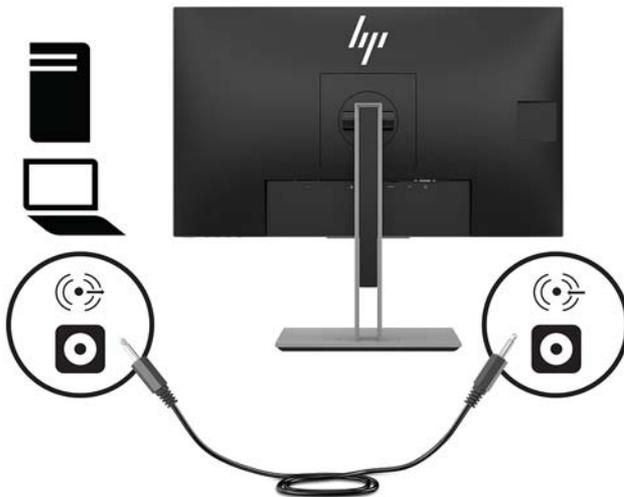

8. Connect one end of the power cord to the power connector on the rear of the monitor and the other end to an AC outlet.

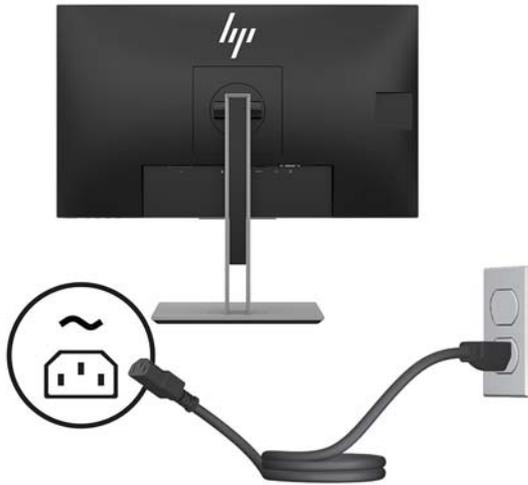

⚠ WARNING! To reduce the risk of electric shock or damage to the equipment:

Do not disable the power cord grounding plug. The grounding plug is an important safety feature.


Plug the power cord into a grounded (earthed) AC outlet that is easily accessible at all times.

Disconnect power from the equipment by unplugging the power cord from the AC outlet.


For your safety, do not place anything on power cords or cables. Arrange them so that no one may accidentally step on or trip over them. Do not pull on a cord or cable. When unplugging the power cord from the AC outlet, grasp the cord by the plug.

Adjusting the monitor


1. Tilt the monitor panel forward or backward to set it to a comfortable eye level.

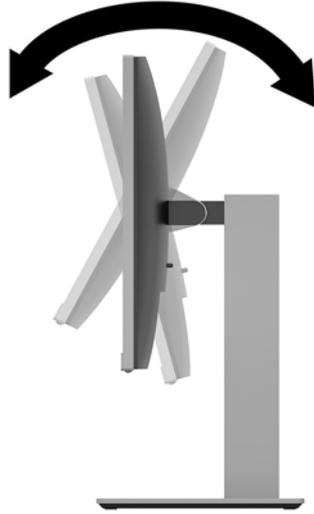

2. Swivel the monitor panel to the left or right for the best viewing angle.

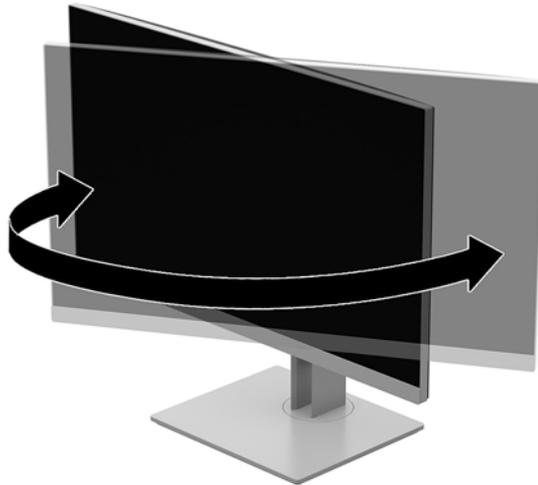


3. Adjust the monitor's height to a comfortable position for your individual workstation. The monitor's top bezel edge should be no higher than eye level. A monitor that is positioned low and reclined may be more comfortable for users with corrective lenses. The monitor should be repositioned as you adjust your working posture throughout the work day.

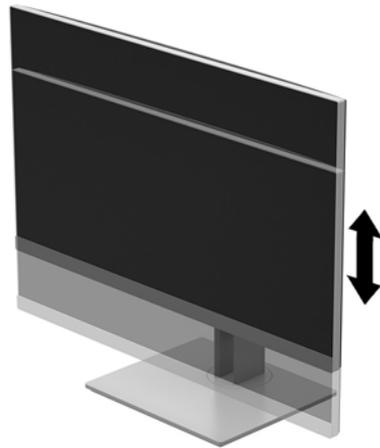

4. You can pivot the monitor panel from landscape to portrait orientation viewing to adapt to your application.
 - a. Adjust the monitor to full height position and tilt the monitor panel back to full tilt position (1).
 - b. Pivot the monitor panel clockwise or counter-clockwise 90° from landscape to portrait orientation (2).

CAUTION: If the monitor is not in full-height and full-tilt position when pivoting, the bottom right corner of the monitor panel will come in contact with the base and potentially cause damage to the monitor.

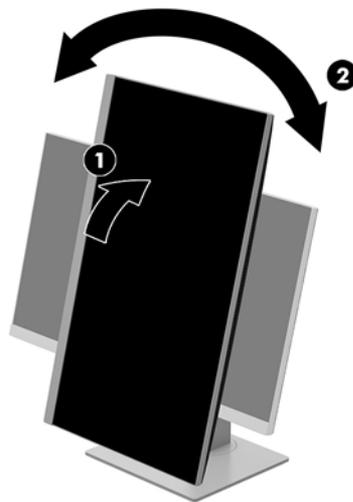

NOTE: To view information on the screen in portrait mode, you can install the HP Display Assistant software included on the software and documentation optical disc or download from www.hp.com/support. The position of the OSD menu can also be rotated to portrait mode. To rotate the OSD menu, access the OSD menu by pressing the **Menu** button on the front bezel, select **OSD Control** from the menu, and then select **OSD Rotation**.

Turning on the monitor

1. Press the power button on the computer to turn it on.
2. Press the power button on the bottom of the monitor to turn it on.



CAUTION: Burn-in image damage may occur on monitors that display the same static image on the screen for 12 or more consecutive hours of nonuse. To avoid burn-in image damage on the monitor screen, you should always activate a screen saver application or turn off the monitor when it is not in use for a prolonged period of time. Image retention is a condition that may occur on all LCD screens. Burned-in image damage on the monitor isn't covered by the warranty.

NOTE: If pressing the power button has no effect, the Power Button Lockout feature may be enabled. To disable this feature, press and hold the monitor power button for 10 seconds.


NOTE: You can disable the power light in the OSD menu. Press the **Menu** button on the front of the monitor, and then select **Power Control > Power LED > Off**.

When the monitor is powered on, a Monitor Status message is displayed for five seconds. The message shows which input is the current active signal, the status of the auto-switch source setting (On or Off; default setting is On), the current preset screen resolution, and the recommended preset screen resolution.

The monitor automatically scans the signal inputs for an active input and uses that input for the screen.

Installing a security cable

You can secure the monitor to a fixed object with an optional security cable available from HP.

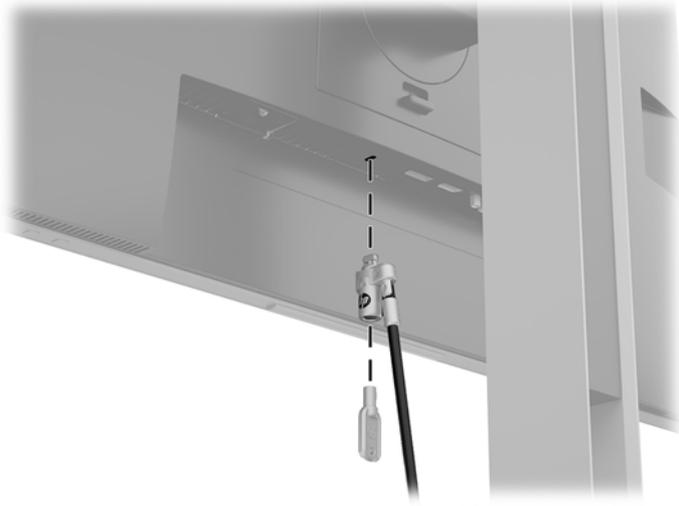

Mounting the monitor

The monitor panel can be attached to a wall, swing arm, or other mounting fixture.

 **NOTE:** This apparatus is intended to be supported by a UL or CSA Listed wall-mount bracket.


 **CAUTION:** This monitor supports the VESA industry-standard 100 mm mounting holes. To attach a third-party mounting solution to the monitor panel, use four 4 mm, 0.7 pitch, 10 mm–long screws. Longer screws may damage the monitor panel. It is important to verify that the manufacturer’s mounting solution is compliant with the VESA standard and is rated to support the weight of the monitor panel. For best performance, it is important to use the power and video cables provided with the monitor.

Removing the monitor stand

You can remove the monitor panel from the stand to install the monitor panel on a wall, a swing arm, or other mounting fixture.


CAUTION: Before beginning to disassemble the monitor, be sure that the monitor is turned off and all cables are disconnected.

1. Disconnect and remove all cables from the monitor.
2. Position the monitor facedown on a flat surface covered by a clean, dry cloth.
3. Push up on the latch near the bottom center of the monitor **(1)**.
4. Swing the bottom of the stand up until the mounting plate clears the recess in the panel **(2)**.
5. Slide the stand out of the recess.

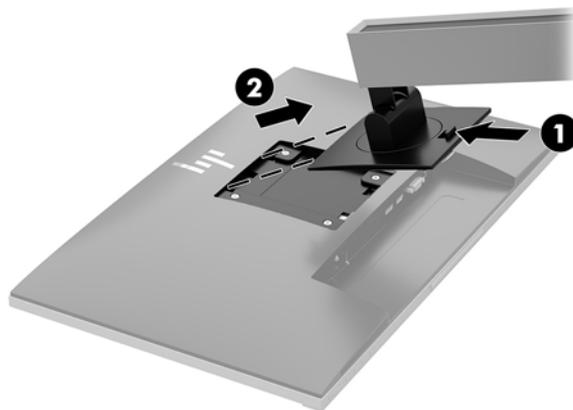


Attaching the VESA mounting bracket

1. Remove the four screws from the VESA holes located on the rear of the monitor panel.

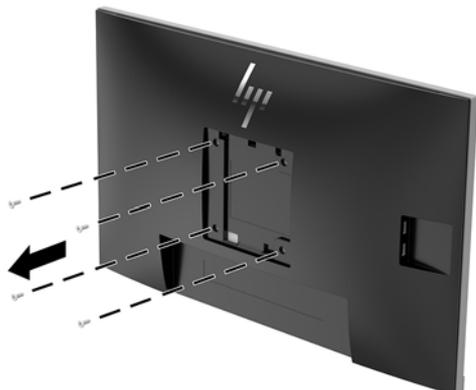

2. Install the mounting plate to the wall or swing arm of your choice using the four screws that were removed from the VESA holes on the rear of the monitor panel.

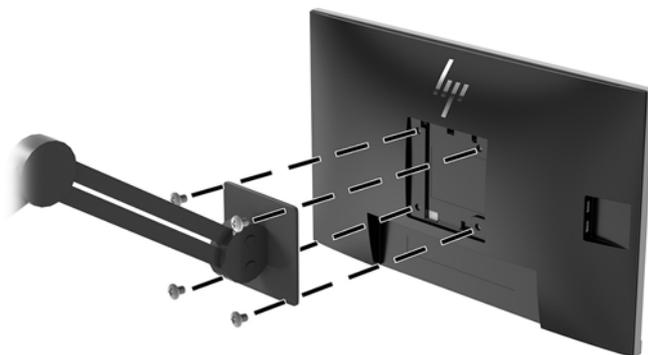

2 Using the monitor

Software and utilities

The optical disc, if one is included with the monitor, contains files you can install on the computer. If you do not have an optical drive, you can download the files from <http://www.hp.com/support>.

- INF (Information) file
- ICM (Image Color Matching) files (one for each calibrated color space)
- HP Display Assistant software

The Information file

The INF file defines monitor resources used by Windows® operating systems to ensure monitor compatibility with the computer's graphics adapter.

This monitor is Microsoft Windows Plug and Play-compatible and the monitor will work correctly without installing the INF file. Monitor Plug and Play-compatibility requires that the computer's graphic card is VESA DDC2-compliant and that the monitor connects directly to the graphics card. Plug and Play does not work through separate BNC-type connectors or through distribution buffers/boxes.

The Image Color Matching file

The ICM files are data files that are used in conjunction with graphics programs to provide consistent color matching from monitor screen to printer, or from scanner to monitor screen. This file is activated from within graphics programs that support this feature.



NOTE: The ICM color profile is written in accordance with the International Color Consortium (ICC) Profile Format specification.

Installing the INF and ICM files

After you determine that you need to update, use one of the following methods to install the files.

Installing from the optical disc (available in select regions)

To install the INF and ICM files on the computer from the optical disc:

1. Insert the optical disc into the computer optical drive. The optical disc menu is displayed.
2. View the **HP Monitor Software Information** file.
3. Select **Install Monitor Driver Software**.
4. Follow the on-screen instructions.
5. Ensure that the proper resolution and refresh rates appear in the Windows Display control panel.

Downloading from the web

If you do not have a computer or a source device with an optical drive, you can download the latest version of INF and ICM files from the HP monitors support website.

1. Go to <http://www.hp.com/support>.
2. Select **Get software and drivers**.
3. Follow the on-screen instructions to select your monitor and download the software.

Using the on-screen display (OSD) menu

Use the OSD menu to adjust the monitor screen image based on your preferences. You can access and make adjustments in the OSD menu using the buttons on the monitor's bezel.

To access the OSD menu and make adjustments, do the following:

1. If the monitor is not already on, press the power button to turn on the monitor.
2. To access the OSD menu, press one of the four bezel buttons to activate the buttons. Then press the **Menu** button to open the OSD.
3. Use the three function buttons to navigate, select, and adjust the menu choices. The on-screen button labels vary depending on which menu or submenu is active.

The following table lists the menu selections in the OSD main menu.

Main Menu	Description
Brightness	Adjusts the brightness level of the screen. The factory default is 90.
Contrast	Adjusts the contrast level of the screen. The factory default is 80.
Color Control	Selects and adjusts the screen color.
Input Control	Selects the video input signal.
Image Control	Adjusts the screen image.
Audio Control	Adjusts the audio settings.
Power Control	Adjusts the power settings.
Menu Control	Adjusts the on-screen display (OSD) and function button controls.
Management	Adjusts the DDC/CI settings, selects the language, and returns all OSD menu settings to the factory default settings.
Information	Selects and displays important information about the monitor.
Exit	Exits the OSD menu screen.

Assigning the function buttons

Pressing one of the four front bezel function buttons activates the buttons and displays the icons above the buttons. The factory default button icons and functions are shown below.



Button	Function
1 Menu	Opens the OSD (on-screen display) menu.
2 Information (function button 3 - assignable)	For digital input, opens the Information menu. For VGA input, activates the auto adjustment feature to optimize the screen image.
3 Viewing Mode (function button 2 - assignable)	Adjusts the monitor to a comfortable viewing light.
4 Next Active Input (function button 1 - assignable)	Switches the monitor's input source to the next active input.

You can change the function buttons from their default values so that when the buttons are activated you can quickly access commonly used menu items.

To assign the function buttons:

1. Press one of the four front bezel buttons to activate the buttons, and then press the [Menu](#) button to open the OSD.
2. In the OSD menu, select **Menu Control > Assign Buttons** and then select one of the available options for the button you want to assign.



NOTE: You can only assign the three function buttons. You can not reassign the [Menu](#) button or the power button.


Camera

With Skype for Business installed on your external source device, you can use the camera on the monitor in the following ways:

- Stream online video conferences
- Send and receive Instant messages
- Schedule meetings
- Maintain security over conversations

To release the camera, press it down to unlock it.

To close the camera, press it down until it locks.

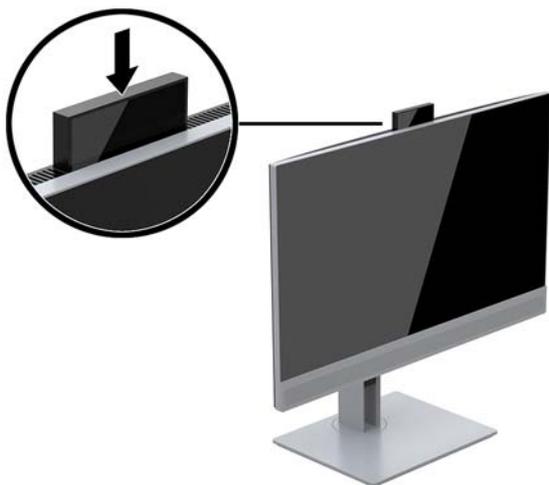

Using Auto-Sleep Mode

The monitor supports an OSD option called **Auto-Sleep Mode** that allows you to enable or disable a reduced power state for the display. When Auto-Sleep Mode is enabled (enabled by default), the monitor will enter a reduced power state when the host PC signals low power mode (absence of either horizontal or vertical sync signal).

Upon entering this reduced power state (sleep mode), the monitor screen is blanked, the backlight is turned off, and the power light indicator turns amber. The monitor draws less than 0.5 W of power when in this reduced power state. The monitor will wake from the sleep mode when the host PC sends an active signal to the monitor (for example, if you activate the mouse or keyboard).

You can disable Auto-Sleep Mode in the OSD. Press one of the four front bezel function buttons to activate the buttons, and then press the **Menu** button to open the OSD.

1. In the OSD, select **Power Control**.
2. Select **Power Mode**.
3. Select **Performance** and then select **Save and Return** back to power control menu.
4. Select **Power Control**.
5. Select **Auto Sleep Mode**.
6. Select **Off**.

Adjusting Low Blue Light Mode

Decreasing the blue light emitting from the display reduces the blue light exposure to your eyes. HP monitors provide a setting to reduce blue light output and create a more relaxing and less stimulating image while you read content on the screen. To adjust your monitor to a comfortable viewing light, follow the steps below.

To adjust the blue light output from the display:

1. In the OSD, select **Color Control**.
2. Select **Viewing Modes**.
3. Select your desired setting:
 - **Low Blue Light:** TUV certified. Reduces the blue light for improved eye comfort
 - **Night:** Adjusts to the lowest blue light and reduces the impact on sleep
 - **Reading:** Optimizes blue light and brightness for indoor viewing
4. Select **Save and Return** to save your setting and close the **Viewing Mode** menu. Select **Cancel** if you don't want to save the setting.
5. Select **Exit** from the Main menu.

 **WARNING!** To reduce the risk of serious injury, read the *Safety & Comfort Guide*. It describes proper workstation setup, and proper posture, health, and work habits for computer users. The *Safety & Comfort Guide* also provides important electrical and mechanical safety information. The *Safety & Comfort Guide* is located on the Web at <http://www.hp.com/ergo>.

3 Support and troubleshooting

Solving common problems

The following table lists possible problems, the possible cause of each problem, and the recommended solutions.

Problem	Possible Cause	Solution
Screen is blank or video is flashing.	Power cord is disconnected.	Connect the power cord.
	Monitor is turned off.	Press the front bezel power button. NOTE: If pressing the power button is ineffective, press and hold the power button for 10 seconds to disable the Power Button Lockout feature.
	Video cable is improperly connected.	Connect the video cable properly. See Connecting the cables on page 7 for more information.
	System is in sleep mode.	Press any key on the keyboard or move the mouse to exit sleep mode.
	Video card is incompatible.	Open the OSD menu and select the Input Control menu. Set Auto-Switch Input to Off and manually select the input.
Image appears blurred, indistinct, or too dark.	Brightness setting is too low.	Open the OSD menu and select Brightness to adjust the brightness scale as needed.
No speaker volume or low speaker volume.	Volume control is turned down.	Adjust the volume control on the bottom left of the front panel.
	Volume is muted.	Press up on the volume control to unmute the volume.
	Volume is turned down in the OSD.	Open the OSD, select Audio Control > Volume , and adjust the volume scale.
	Headphones are plugged in.	Unplug the headphones. The speakers are disabled when the headphones are plugged in.
Check Video Cable is displayed on the screen.	Monitor video cable is disconnected.	Connect the appropriate video signal cable between the computer and monitor. Be sure that the computer power is off while you connect the video cable.
Input Signal Out of Range is displayed on the screen.	Video resolution and/or refresh rate are set higher than the monitor supports.	Change the settings to a supported setting. See Preset display resolutions on page 30 for more information.
The monitor is off but it did not seem to enter into sleep mode.	The monitor's power saving control is disabled.	Open the OSD menu and select Power Control > Auto-Sleep Mode and set auto-sleep to On .
OSD Lockout is displayed.	The monitor's OSD Lockout function is enabled.	Press and hold the Menu button on the front bezel for 10 seconds to disable the OSD Lockout function.
Power Button Lockout is displayed.	The monitor's Power Button Lockout function is enabled.	Press and hold the power button for 10 seconds to disable the Power Button Lockout function.

Using the auto-adjustment function (analog input)

When you first set up the monitor, conduct a Factory Reset of the computer, or change the resolution of the monitor, the Auto-Adjustment feature automatically engages, and attempts to optimize your screen for you.


You may also optimize the screen performance for the VGA (analog) input at any time from the Auto Adjustment menu in the OSD and by using the auto-adjustment pattern software utility on the optical disc provided (select models only).

Do not use this procedure if the monitor is using an input other than VGA. If the monitor is using a VGA (analog) input, this procedure can correct the following image quality conditions:

- Fuzzy or unclear focus
- Ghosting, streaking, or shadowing effects
- Faint vertical bars
- Thin, horizontal scrolling lines
- An off-center picture

To use the auto-adjustment feature:

1. Allow the monitor to warm up for 20 minutes before adjusting.
2. Press the **Menu** button, and then select **Image Control > Auto Adjustment** from the OSD menu. If the result is not satisfactory, continue with the procedure.
3. Select **Open Auto-Adjustment Utility** provided on the optical disc, if one is included with your monitor. The setup test pattern is displayed.
4. Press the **ESC** key or any other key on the keyboard to exit the test pattern.

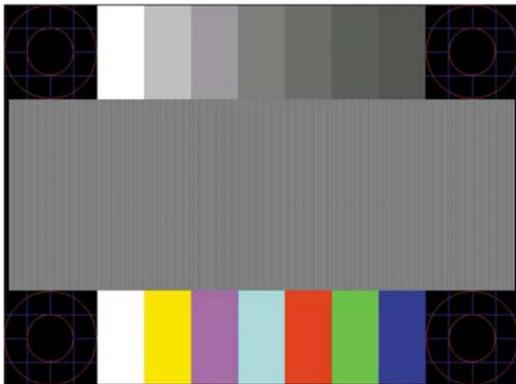

NOTE: The auto-adjustment test pattern utility can be downloaded from <http://www.hp.com/support>.

Optimizing image performance (analog input)

Two controls in the on-screen display can be adjusted to improve image performance: Clock and Phase (available in the OSD menu).

 **NOTE:** The Clock and Phase controls are adjustable only when using an analog (VGA) input. These controls are not adjustable for digital inputs.

The Clock must first be set correctly since the Phase settings are dependent on the main Clock setting. Use these controls only when the auto-adjustment function does not provide a satisfactory image.


- **Clock:** Increases/decreases the value to minimize any vertical bars or stripes visible on the screen background.
- **Phase:** Increases/decreases the value to minimize video flickering or blurring.

 **NOTE:** When using the controls, you will obtain the best results by using the auto-adjustment pattern software utility provided on the optical disc.

When adjusting the Clock and Phase values, if the monitor images become distorted, continue adjusting the values until the distortion disappears. To restore the factory settings, select **Yes** from the **Factory Reset** menu in the on-screen display.

To eliminate vertical bars (Clock):

1. Press the **Menu** button on the monitor front bezel to open the OSD menu, and then select **Image Control**.
2. Select **Clock and Phase**.
3. Use the function buttons on the monitor front bezel that display up and down arrow icons to eliminate vertical bars. Press the buttons slowly so that you do not miss the optimum adjustment point.

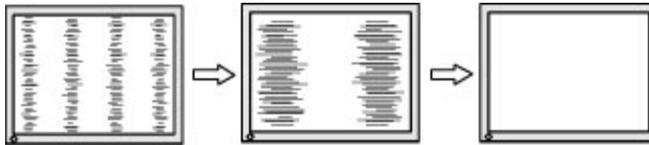

4. After adjusting the Clock, if blurring, flickering, or bars appear on the screen, proceed to adjust the Phase.


To remove flickering or blurring (Phase):

1. Press the **Menu** button on the monitor front bezel to open the OSD menu, and then select **Image Control**.
2. Select **Clock and Phase**.
3. Press the function buttons on the monitor front bezel that display up and down arrow icons to eliminate flickering or blurring. Flickering or blurring may not be eliminated, depending on the computer or graphics controller card installed.



To correct screen position (Horizontal Position or Vertical Position):

1. Press the **Menu** button on the monitor's front bezel to open the OSD menu, and then select **Image Position**.
2. Press the function buttons on the monitor front bezel that display up and down arrow icons to properly adjust the position of the image in the display area of the monitor. The Horizontal Position shifts the image left or right; the Vertical Position shifts the image up and down.

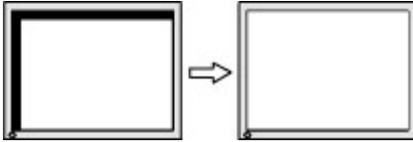

Button lockouts

Holding down the power button or **Menu** button for ten seconds will lock out the functionality of the buttons. You can restore the functionality by holding the buttons down again for ten seconds. This functionality is only available when the monitor is powered on, displaying an active signal, and the OSD is not open.

Contacting support

For additional information on using your monitor, go to <http://www.hp.com/support>. Select **Find your product** and then follow the on-screen instructions.

To resolve a hardware or software problem, go to <http://www.hp.com/support>. Use this site to get more information about your product, including links to discussion forums and instructions on troubleshooting. You can also find information on how to contact HP and open a support case.



NOTE: The monitor user guide, reference material, and drivers are available at <http://www.hp.com/support>.

Preparing to call technical support


If you cannot solve a problem using the troubleshooting tips in this section, you may need to call technical support. Have the following information available when you call:

- Monitor model number
- Monitor serial number
- Purchase date on invoice
- Conditions under which the problem occurred
- Error messages received
- Hardware configuration
- Name and version of the hardware and software you are using

Locating the serial number and product number

The serial number and product number are located on a label on the rear of the monitor panel. You may need these numbers when contacting HP about the monitor model.

 **NOTE:** You may need to partially pivot the monitor panel to read the label.

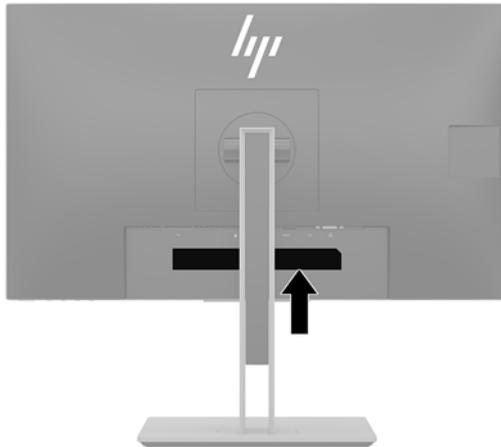

4 Maintaining the monitor

Maintenance guidelines

To enhance the performance and extend the life of the monitor:

- Do not open the monitor cabinet or attempt to service this product yourself. Adjust only those controls that are covered in the operating instructions. If the monitor is not operating properly or has been dropped or damaged, contact an authorized HP dealer, reseller, or service provider.
- Use only a power source and connection appropriate for this monitor, as indicated on the label/back plate of the monitor.
- Be sure the total ampere rating of the products connected to the outlet does not exceed the current rating of the electrical outlet, and the total ampere rating of the products connected to the cord does not exceed the rating of the cord. Look on the power label to determine the ampere rating (AMPS or A) for each device.
- Install the monitor near an outlet that you can easily reach. Disconnect the monitor by grasping the plug firmly and pulling it from the outlet. Never disconnect the monitor by pulling the cord.
- Turn the monitor off when not in use. You can substantially increase the life expectancy of the monitor by using a screen saver program and turning off the monitor when not in use.



NOTE: Monitors with a “burned-in image” are not covered under the HP warranty.

- Slots and openings in the cabinet are provided for ventilation. These openings must not be blocked or covered. Never push objects of any kind into cabinet slots or other openings.
- Do not drop the monitor or place it on an unstable surface.
- Do not allow anything to rest on the power cord. Do not walk on the cord.
- Keep the monitor in a well-ventilated area, away from excessive light, heat, or moisture.
- When removing the monitor stand, you must position the monitor facedown on a soft area to prevent it from getting scratched, defaced, or broken.

Cleaning the monitor

1. Turn off the monitor and unplug the power cord from the AC outlet.
2. Dust the monitor by wiping the screen and the cabinet with a soft, clean antistatic cloth.
3. For more difficult cleaning situations, use a 50/50 mix of water and isopropyl alcohol.



IMPORTANT: Spray the cleaner onto a cloth and use the damp cloth to gently wipe the screen surface. Never spray the cleaner directly on the screen surface. It may run behind the bezel and damage the electronics.

IMPORTANT: Do not use cleaners that contain any petroleum-based materials such as benzene, thinner, or any volatile substance to clean the monitor screen or cabinet. These chemicals may damage the monitor.

Shipping the monitor

Keep the original packing box in a storage area. You may need it later if you move or ship the monitor.

A Technical specifications



NOTE: All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

For the latest specifications or additional specifications on this product, go to <http://www.hp.com/go/quickspecs/> and search for your specific monitor model to find the model-specific QuickSpecs.

60.5 cm/23.8-inch model

Display, wide-screen	60.5 cm	23.8-inch
Type	IPS	
Viewable image size	60.5 cm diagonal	23.8-inch diagonal
Maximum weight (unpacked)	6.6 kg	14.55 lbs
Dimensions (include base)		
Height (highest position)	51.37 cm	20.22 inches
Height (lowest position)	36.37 cm	14.32 inches
Depth	21.40 cm	8.43 inches
Width	53.88 cm	21.21 inches
Tilt	-5° to 22°	
Swivel	45° ± 2°	
Maximum graphic resolution	1920 x 1080	
Optimum graphic resolution	1920 x 1080	
Environmental requirements		
Operating temperature	5 to 35° C	41 to 95° F
Storage temperature	-20 to 60° C	-4 to 140° F
Storage humidity		5% to 95% (non-condensing)
Operating humidity		20% to 80% (non-condensing)
Power source	100–240 VAC 50/60 Hz	
Input terminal	One USB Type-B connector, one HDMI connector, one DisplayPort connector, one VGA connector	

68.5 cm/27-inch model

Display, wide-screen	68.5 cm	27-inch
Type	IPS	
Viewable image size	68.5 cm diagonal	27-inch diagonal
Maximum weight (unpacked)	7.9 kg	17.4 lbs
Dimensions (include base)		
Height (highest position)	53.39 cm	21.02 inches
Height (lowest position)	38.39 cm	15.11 inches
Depth	21.4 cm	8.43 inches
Width	61.094 cm	24.1 inches
Tilt	-5° to 22°	
Swivel	45° ± 2°	
Maximum graphic resolution	1920 x 1080	
Optimum graphic resolution	1920 x 1080	
Environmental requirements temperature		
Operating temperature	5 to 35° C	41 to 95° F
Storage temperature	-20 to 60° C	-4 to 140° F
Storage humidity		5% to 95% (non-condensing)
Operating humidity		20% to 80% (non-condensing)
Power source	100–240 VAC 50/60 Hz	
Input terminal	One Type C connector, HDMI connector, one DisplayPort connector, one VGA connector	

Preset display resolutions

The display resolutions listed below are the most commonly used modes and are set as factory defaults. The monitor automatically recognizes these preset modes and they will appear properly sized and centered on the screen.

60.5 cm/23.8-inch and 68.5 cm/27-inch models

Preset	Pixel Format	Horz Freq (kHz)	Vert Freq (Hz)
1	640 × 480	31.469	59.940
2	720 × 400	31.469	70.087
3	800 × 600	37.879	60.317
4	1024 × 768	48.363	60.004
5	1280 × 720	45.00	60.000
6	1280 × 800	49.702	59.810

7	1280 × 1024	63.981	60.020
8	1440 × 900	55.935	59.887
9	1600 × 900	60.000	60.000
10	1680 × 1050	65.290	59.954
11	1920 × 1080	67.500	60.000

60.5 cm/23.8-inch and 68.5 cm/27-inch models

Preset	Timing name	Pixel format	Horz freq (kHz)	Vert freq (Hz)
1	480p	720 × 480	31.469	60
2	576p	720 × 576	31.25	50
3	720p50	1280 × 720	37.5	50
4	720p60	1280 × 720	45	60
5	1080p60	1920 × 1080	67.5	60
6	1080p50	1920 × 1080	56.25	50

Entering user modes

The video controller signal may occasionally call for a mode that is not preset under the following circumstances:

- You are not using a standard graphics adapter.
- You are not using a preset mode.

If this occurs, you may need to readjust the parameters of the monitor screen by using the on-screen display. Your changes can be made to any or all of these modes and saved in memory. The monitor automatically stores the new setting and then recognizes the new mode just as it does a preset mode. In addition to the factory preset modes, there are at least 10 user modes that can be entered and stored.

Energy saver feature

The monitors support a reduced power state. The reduced power state will be entered into if the monitor detects the absence of either the horizontal sync signal or the vertical sync signal. Upon detecting the absence of these signals, the monitor screen is blanked, the backlight is turned off, and the power light is turned amber. When the monitor is in the reduced power state, the monitor will utilize 0.5 watts of power. There is a brief warm-up period before the monitor will return to its normal operating mode.

Refer to the computer manual for instructions on setting energy saver features (sometimes called power management features).



NOTE: The above power saver feature works only when the monitor is connected to a computer that has energy saver features.

By selecting the settings in the monitor's Energy Saver utility, you can also program the monitor to enter into the reduced power state at a predetermined time. When the monitor's Energy Saver utility causes the monitor to enter the reduced power state, the power light blinks amber.

B Accessibility

HP designs, produces, and markets products and services that can be used by everyone, including people with disabilities, either on a stand-alone basis or with appropriate assistive devices.

Supported assistive technologies

HP products support a wide variety of operating system assistive technologies and can be configured to work with additional assistive technologies. Use the Search feature on your source device that is connected to the monitor to locate more information about assistive features.

 **NOTE:** For additional information about a particular assistive technology product, contact customer support for that product.

Contacting support

We are constantly refining the accessibility of our products and services and welcome feedback from users. If you have an issue with a product or would like to tell us about accessibility features that have helped you, please contact us at (888) 259-5707, Monday through Friday, 6 a.m. to 9 p.m. Mountain Time. If you are deaf or hard-of-hearing and use TRS/VRS/WebCapTel, contact us if you require technical support or have accessibility questions by calling (877) 656-7058, Monday through Friday, 6 a.m. to 9 p.m. Mountain Time.