

Maintenance and Service Guide

SUMMARY

This guide provides information about spare parts, removal and replacement of parts, security, backing up, and more.

© Copyright 2021 HP Development Company,

Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. Intel, Core, Iris, Optane, and vPro are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. SDHC, SDXC, and microSD are trademarks or registered trademarks of SD-3C LLC. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. NVIDIA, GeForce, and Optimus are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. USB Type-C and USB-C are registered trademarks of USB Implementers Forum. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. Miracast are Wi-Fi are registered trademarks of Wi-Fi Alliance.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

First Edition: August 2021

Document Part Number: M76356-001

Product notice

This guide describes features that are common to most models. Some features may not be available on your computer.

Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated, which is always enabled. High-speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See http://www.microsoft.com.

To access the latest user guides, go to http://www.hp.com/support, and follow the instructions to find your product. Then select **Manuals**.

Software terms

By installing, copying, downloading, or otherwise using any software product preinstalled on this computer, you agree to be bound by the terms of the HP End User License Agreement (EULA). If you do not accept these license terms, your sole remedy is to return the entire unused product (hardware and software) within 14 days for a full refund subject to the refund policy of your seller.

For any further information or to request a full refund of the price of the computer, please contact your seller.

Safety warning notice

Reduce the possibility of heat-related injuries or of overheating the computer by following the practices described.



⚠ **WARNING!** To reduce the possibility of heat-related injuries or of overheating the computer, do not place the computer directly on your lap or obstruct the computer air vents. Use the computer only on a hard, flat surface. Do not allow another hard surface, such as an adjoining optional printer, or a soft surface, such as pillows or rugs or clothing, to block airflow. Also, do not allow the AC adapter to come into contact with the skin or a soft surface, such as pillows or rugs or clothing, during operation. The computer and the AC adapter comply with the user-accessible surface temperature limits defined by applicable safety standards.

Table of contents

1 Produ	ct description	
2 Gettin	ng to know your computer	5
	Right side	
	Left side	
	Display	
	Low blue light mode (select products only)	
	Keyboard area	
	Touchpad settings and components	8
	Touchpad settings	8
	Adjusting touchpad settings	8
	Turning on the touchpad	8
	Touchpad components	9
	Lights	<u>9</u>
	Button, vent, and fingerprint reader	10
	Special keys	12
	Bottom	13
	Labels	14
3 Illustr	ated parts catalog	16
	Computer major components	16
	Display assembly subcomponents	19
	Cables	21
	Miscellaneous parts	22
4 Remov	val and replacement procedures preliminary requirements	24
	Tools required	24
	Service considerations	24
	Plastic parts	24
	Cables and connectors	24
	Drive handling	24
	Electrostatic discharge information	25
	Generating static electricity	25
	Preventing electrostatic damage to equipment	26
	Personal grounding methods and equipment	26
	Grounding the work area	27

Recommended materials and equipment	27
Cleaning your computer	28
Enabling HP Easy Clean (select products only)	28
Removing dirt and debris from your computer	28
Cleaning your computer with a disinfectant	29
Caring for wood veneer (select products only)	30
Packaging and transporting guidelines	30
Accessing support information	30
5 Removal and replacement procedures for authorized service provider parts	32
Component replacement procedures	32
Preparation for disassembly	32
Bottom cover	32
Battery	34
WLAN module	35
Solid-state drive	37
Memory modules	38
USB board	39
Speakers	40
Fingerprint reader (select products only)	41
Fan	42
Heat sink	44
System board	46
Touchpad	48
Power connector cable	50
Display assembly	51
Top cover with keyboard	58
6 Using Setup Utility (BIOS)	61
Starting Setup Utility (BIOS)	61
Updating Setup Utility (BIOS)	61
Determining the BIOS version	61
Preparing for a BIOS update	62
Downloading a BIOS update	62
Installing a BIOS update	62
7 Backing up, restoring, and recovering	64
Backing up information and creating recovery media	64
Using Windows tools for backing up	64
Using the HP Cloud Recovery Download Tool to create recovery media (select products only).	64

	Restoring and recovering your system	64
	Creating a system restore	65
	Restoring and recovery methods	65
	Recovering using HP Recovery media	65
	Changing the computer boot order	65
	Using HP Sure Recover (select products only)	66
8 Usin	g HP PC Hardware Diagnostics	67
	Using HP PC Hardware Diagnostics Windows (select products only)	67
	Using an HP PC Hardware Diagnostics Windows hardware failure ID code	67
	Accessing HP PC Hardware Diagnostics Windows	67
	Accessing HP PC Hardware Diagnostics Windows from HP Support Assistant	67
	Accessing HP PC Hardware Diagnostics Windows from the Start menu (select products only)	68
	Downloading HP PC Hardware Diagnostics Windows	
	Downloading the latest HP PC Hardware Diagnostics Windows version from HP	68
	Downloading the HP PC Hardware Diagnostics Windows from the Microsoft Store	68
	Downloading HP Hardware Diagnostics Windows by product name or number (select products only)	. 68
	Installing HP PC Hardware Diagnostics Windows	
	Using HP PC Hardware Diagnostics UEFI	
	Using an HP PC Hardware Diagnostics UEFI hardware failure ID code	
	Starting HP PC Hardware Diagnostics UEFI	
	Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive	
	Downloading the latest HP PC Hardware Diagnostics UEFI version	
	Downloading HP PC Hardware Diagnostics UEFI by product name or number (select products only)	
	Using Remote HP PC Hardware Diagnostics UEFI settings (select products only)	
	Downloading Remote HP PC Hardware Diagnostics UEFI	
	Downloading the latest Remote HP PC Hardware Diagnostics UEFI version	
	Downloading Remote HP PC Hardware Diagnostics UEFI by product name or number	
	Customizing Remote HP PC Hardware Diagnostics UEFI settings	
9 Spec	cifications	72
•	Computer specifications	
	39.6 cm (15.6 in) display specifications	
	Solid-state drive specifications	
	Solid-state drive specifications (SATA-3)	

10 Power cord set requirements	75
Requirements for all countries	75
Requirements for specific countries and regions	75
11 Recycling	77
Index	78

1 Product description

This table provides detailed product information.

Table 1-1 Product components and their descriptions

ategory Description		
HP Pavilion 15 Laptop PC		
Model numbers: 15-eg1000 - 15-eg1999		
CTO model number: 15t-eg100		
Intel® processors		
Intel Core® i7-1195G7 (2.9 GHz, turbo up to 5.0 GHz, 4 cores, 3200 MHz, 12 MB L3 cache, 12 W)		
Intel Core i5-1155G7 (2.5 GHz, turbo up to 4.5 GHz, 4 cores, 3200 MHz, 12 MB L3 cache, 12 W)		
Internal graphics		
Intel Iris® Xe Graphics		
Hybrid graphics		
NVIDIA® GeForce® MX450 graphics		
NVIDIA GeForce MX350 graphics		
Supports HD Decode, DX12, and HDMI		
Supports Optimus®		
Supports GPS (GPU Performance Scaling)		
15.6 in (39.6 cm), white light-emitting diode (WLED), narrow bezel		
Full high-definition (FHD) (1920 × 1080), antiglare, embedded DisplayPort (eDP), flat (3.2 mm [.13 in]), standard viewing angle (SVA), 45% NTSC, 220 nits		
FHD, BrightView, ultrawide viewing angle (UWVA), eDP, flat (3.2 mm), 45% NTSC, 250 nits		
FHD, antiglare, UWVA, eDP, flat (3.2 mm), 45% NTSC, 250 nits		
FHD, antiglare, UWVA, eDP + panel self-refresh (PSR), flat (2.6 mm [.1 in]), 72% NTSC, 300 nits		
FHD, BrightView, flat (3.2 mm), 45% NTSC, 250 nits, Touch-on Panel (TOP)		
Two SODIMM slots, not customer accessible or upgradeable supporting up to 16 GB of RAM		
DDR4-3200 dual-channel support		
Supports the following configurations:		
• 16 GB (8 × 2)		
• 12 GB (8 + 4)		
• 8 GB (8 × 1) or (4 × 2)		
PCIe, NVMe, M.2 2280 solid-state drives		

Table 1-1 Product components and their descriptions (continued)

Category	Description		
	1 TB, PCIe + 32 GB Optane® memory		
	512 GB, PCIe		
	512 GB, PCIe + 32 GB Optane memory		
	256 GB, PCIe		
	256 GB, PCIe + 16 GB Optane memory		
Audio and video	Audio brand: B&O		
	Audio control panel: B&O Audio Control		
	Dual speakers		
	Support for HP Audio Boost		
	Supports Alexa		
	Supports Cortana (far field)		
	Supports XiaoWei		
	HP Wide Vision HD Camera : indicator LED, USB 2.0, back-illuminated sensor (BSI), f2.0, wide dynamic range (WDR), 88° wide field-of-view (WFOV)		
	720p by 30 frames per second		
	Dual-array digital microphone with appropriate software: beam forming, echo cancellation, noise suppression		
Wireless	Compatible with Miracast® devices		
	Supports modern standby (connected)		
	Intel Bluetooth® audio offload		
	Turbo Lite WLAN SVTP		
	Integrated wireless options with dual antennas		
	Realtek 8852AE-VT Wi-Fi® 6 Bluetooth 5.2 WLAN		
	Intel Wi-Fi 6 AX201-W + Bluetooth 5 (non-vPro $^{\circ}$) (802.11ax 2 × 2, MU-MIMO, supporting gigabit file transfer speeds)		
	Realtek 8852AE-VT Wi-Fi® 6 Bluetooth 5.2 WLAN		
	Integrated wireless options with single antenna		
	Intel Wireless AC-9461 802.11ac 1 × 1 Wi-Fi + Bluetooth 5.1		
	Realtek RTL8821CE 802.11ac 1 × 1 Wi-Fi + Bluetooth 4.2 (MU-MIMO supported)		
Media card reader	Supports microSD™, SDHC™, SDXC™		
	Push-push insertion/removal		
Ports	Hot plug/unplug and autodetect for correct output to wide-aspect vs. standard aspect video		
	HDMI v2.0 supporting: up to 4096 × 2160 @ 60 Hz		
	Audio-out (headphone)/audio-in (microphone) combo jack		

Table 1-1 Product components and their descriptions (continued)

Category	Description
	USB 3.2 Gen 2 Type-C (supports data transfer, power delivery, HP Sleep & Charge; DisplayPort 1.4 out up to 4096 × 2304 @ 60 Hz through adapter; HDMI 2.0 out up to 3840 × 2160 @ 60 Hz with HDCP 2.2 through adapter)
	USB 3.2 Gen 1 Type-A (2)
	AC Smart Pin adapter plug
Keyboard/pointing	Keyboard
levices	Standard keyboard with numeric keypad
	Backlit keyboard with numeric keypad
	Touchpad
	Clickpad with image sensor
	Multitouch gestures enabled
	Precision touchpad support
	Support for Modern Trackpad Gestures
	Taps enabled as default
Power requirements	Battery
	3 cell, 41 Whr, polymer, HP Long Life
	HP Fast Charge Technology
	Smart AC adapters (barrel type, 4.5 mm)
	65 W
	65 W, LA MERCO
	65 W, EM
	45 W
	45 W, LA MERCO
	Power cord
	C5, 1 m (3.3 ft)
ecurity	Supports Trusted Platform Module (TPM) 2.0, firmware based
	Nano Security Lock
	Integrated fingerprint reader (select products only)
perating system	Windows® 11 Home 64
	Windows 11 Home 64 Chinese Market CPPP
	Windows 11 Home 64 High-end Chinese Market CPPP
	Windows 11 Home 64 Plus
	Windows 11 Home 64 Plus Single Language
	Windows 11 Home 64 Plus Single Language Africa Market

Table 1-1 Product components and their descriptions (continued)

Category	Description	
	Windows 11 Home 64 Plus Single Language APAC EM PPP	
	Windows 11 Home 64 Plus Single Language India Market	
	Windows 11 Home 64 Plus Single Language Indonesia Market	
	Windows 11 Home 64 Single Language	
	Windows 11 Home 64 Single Language Africa Market	
	Windows 11 Home 64 Single Language APAC EM PPP	
	Windows 11 Home 64 Single Language India Market	
	Windows 11 Home 64 Single Language Indonesia Market	
	Windows 11 Home S 64	
	Windows 11 Home S 64 Plus	
	Windows 11 Pro 64	
	Windows 11 Pro 64 Chinese Market	
	FreeDOS 3.0	
Serviceability	End user replaceable parts	
	AC adapter	

2 Getting to know your computer

Your computer features top-rated components. This chapter provides details about your components, where they are located, and how they work.

Right side

Identify the components on the right side of the computer.

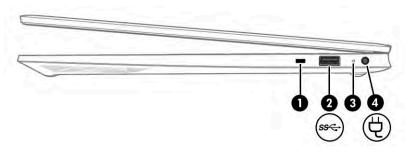


Table 2-1 Right-side components and their descriptions

Comp	Component		Description	
(1)		Security cable slot	Attaches an optional security cable to the computer.	
			NOTE: The security cable is designed to act as a deterrent, but it might not prevent the computer from being mishandled or stolen.	
(2)	ss←	USB SuperSpeed 5 Gbps port	Connects a USB device, provides high-speed data transfer, and (for select products) charges small devices (such as a smartphone) when the computer is on or in Sleep mode. NOTE: Use a standard USB Type-A charging cable or cable adapter (purchased separately) when charging a small external device.	
(3)		AC adapter and battery light	White: The AC adapter is connected and the battery is fully charged.	
			 Blinking amber: The AC adapter is disconnected and the battery has reached a low battery level. 	
			 Amber: The AC adapter is connected and the battery is charging. 	
			Off: The battery is not charging.	
(4)	Ą	Connects an AC adapter.	Connects an AC adapter.	

Left side

Identify the components on the left side of the computer.

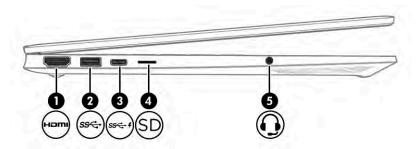


Table 2-2 Left-side components and their descriptions

Comp	onent		Description
(1)	наті	HDMI port	Connects an optional video or audio device, such as a high- definition television, any compatible digital or audio component or a high-speed High-Definition Multimedia Interface (HDMI) device.
(2)	ss∕	USB SuperSpeed 5 Gbps port	Connects a USB device, provides high-speed data transfer, and (for select products) charges small devices (such as a smartphone) when the computer is on or in Sleep mode.
			NOTE: Use a standard USB Type-A charging cable or cable adapter (purchased separately) when charging a small external device.
(3)	ss 🕁 🖡	USB Type-C® power connector and SuperSpeed 10 Gbps port with DisplayPort™ output	Connects an AC adapter that has a USB Type-C connector, supplying power to the computer and, if needed, charging the computer battery.
			– and –
			Connects a USB device, provides high-speed data transfer, and (for select products) charges small devices (such as a smartphone) when the computer is on or in Sleep mode.
			NOTE: Use a standard USB Type-C charging cable or cable adapter (purchased separately) when charging a small external device.
			– and –
			Connects a display device that has a USB Type-C connector, providing DisplayPort output.
(4)	SD	microSD memory card reader (select products only)	Reads optional memory cards that enable you to store, manage, share, or access information.
			To insert a card:
			Hold the card label-side up, with connectors facing the computer.
			Insert the card into the memory card reader, and then press in on the card until it is firmly seated.
			To remove a card:
			Press in on the card, and then remove it from the memory card reader.
(5)	O	Audio-out (headphone)/Audio-in (microphone) combo jack	Connects optional powered stereo speakers, headphones, earbuds, a headset, or a television audio cable. Also connects an optional headset microphone. This jack does not support optional standalone microphones.

Table 2-2 Left-side components and their descriptions (continued)

Component	Description
	WARNING! To reduce the risk of personal injury, adjust the volume before putting on headphones, earbuds, or a headset. For additional safety information, see the <i>Regulatory, Safety, and Environmental Notices</i> .
	To access this guide:
	Select the Search icon in the taskbar, type HP Documentation in the search box, and then select HP Documentation.
	NOTE: When a device is connected to the jack, the computer speakers are disabled.

Display

The computer display can include essential components such as speakers, antennas, cameras, and microphones.

Low blue light mode (select products only)

Your computer display is shipped from the factory in low blue light mode for improved eye comfort and safety. Also, blue light mode automatically adjusts blue light emissions when you are using the computer at night or for reading.

WARNING! To reduce the risk of serious injury, read the Safety & Comfort Guide. It describes proper workstation setup and proper posture, health, and work habits for computer users. The Safety & Comfort Guide also provides important electrical and mechanical safety information. The Safety & Comfort Guide is available on the web at http://www.hp.com/ergo.

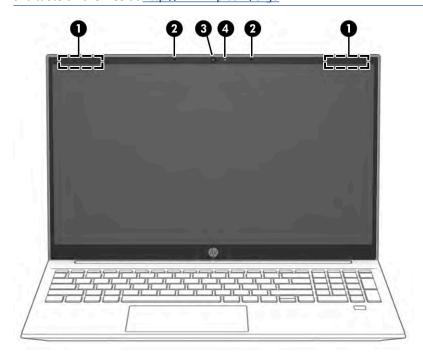


Table 2-3 Display components and their descriptions

Component		Description
(1)	WLAN antennas*	Send and receive wireless signals to communicate with wireless local area networks (WLANs).
(2)	Internal microphones (2)	Record sound.
(3)	Camera	Allows you to video chat, record video, and record still images. Some cameras also allow a facial recognition logon to Windows, instead of a password logon.
		NOTE: Camera functions vary depending on the camera hardware and software installed on your product.
(4)	Camera light	On: The camera is in use.

^{*}The antennas are not visible from the outside of the computer. For optimal transmission, keep the areas immediately around the antennas free from obstructions.

For wireless regulatory notices, see the section of the Regulatory, Safety, and Environmental Notices that applies to your country or region.

To access this guide:

Select the Search icon in the taskbar, type HP Documentation in the search box, and then select HP Documentation.

Keyboard area

Keyboards can vary by language.



NOTE: The keyboard area, including the function keys and (select products only) power key, is disabled in stand, tent, and tablet modes. To enable the keyboard, including the power key, change to the clamshell mode.

Touchpad settings and components

Learn the touchpad settings and components

Touchpad settings

Learn how to adjust touchpad settings.

Adjusting touchpad settings

Use these steps to adjust touchpad settings and gestures.

- Select the Search icon in the taskbar, type touchpad settings in the search box, and then press enter.
- Choose a setting.

Turning on the touchpad

Follow these steps to turn on the touchpad.

- Select the Search icon in the taskbar, type touchpad settings in the search box, and then press enter.
- 2. Using an external mouse, click the **touchpad** button.

If you are not using an external mouse, press the Tab key repeatedly until the pointer rests on the **touchpad** button. Then press the spacebar to select the button.

Touchpad components

Identify the touchpad components.

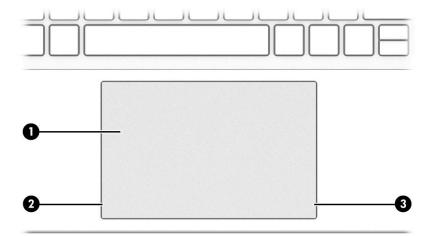


Table 2-4 Touchpad components and their descriptions

Component		Description
(1)	Touchpad zone	Reads your finger gestures to move the pointer or activate items on the screen.
(2)	Left control zone	Textured area that allows you to perform additional gestures.
(3)	Right control zone	Textured area that allows you to perform additional gestures.

Lights

Identify the lights on the computer.


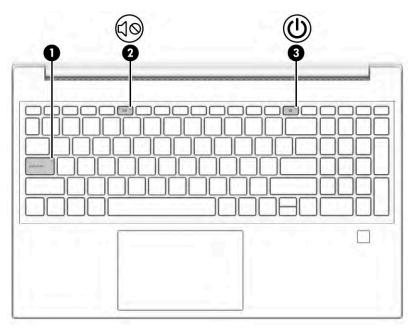


Table 2-5 Lights and their descriptions

Comp	Component		Description	
(1)		Caps lock light	On: Caps lock is on, which switches the key input to all capital letters.	
(2)	ďО	Mute light	On: Computer sound is off.	
	40		Off: Computer sound is on.	
(3)	۲l۱	Power light	On: The computer is on.	
	O		 Blinking (select products only): The computer is in the Sleep state, a power-saving state. The computer shuts off power to the display and other unnecessary components. 	
			 Off: Depending on your computer model, the computer is off, in Hibernation, or in Sleep. Hibernation is the power- saving state that uses the least amount of power. 	

Button, vent, and fingerprint reader

Identify the computer button, vent and fingerprint reader.

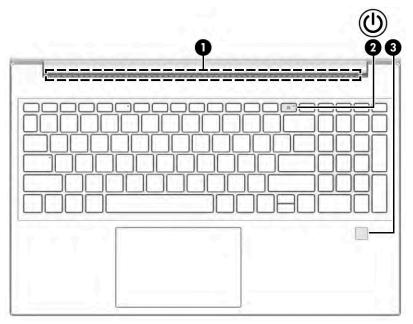

Fingerprint readers, which enable a fingerprint logon, can be located on the touchpad, on a side panel of the computer, or on the top cover below the keyboard.

IMPORTANT: To verify that your computer supports fingerprint reader sign-in, select the **Search** icon in the taskbar, type Sign-in options in the search box, and follow the on-screen instructions. If **Fingerprint** reader is not listed as an option, then your computer does not include a fingerprint reader.

Table 2-6 Button, vent, and fingerprint reader and their descriptions

Compon	ent		Description
(1)		Vent	Enables airflow to cool internal components.
			NOTE: The computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.
(2)	(J)	Power button	 When the computer is off, press the button briefly to turn on the computer.
			 When the computer is on, press the button briefly to initiate Sleep.
			 When the computer is in the Sleep state, press the button briefly to exit Sleep (select products only).
			 When the computer is in Hibernation, press the button briefly to exit Hibernation.
			IMPORTANT: Pressing and holding down the power button results in the loss of unsaved information.
			If the computer has stopped responding and shutdown procedures are ineffective, press and hold the power button down for at least 10 seconds to turn off the computer.
			To learn more about your power settings, see your power options:

Table 2-6 Button, vent, and fingerprint reader and their descriptions (continued)

Component		Description	
		Right-click the Power iconOptions.	
(3)	Fingerprint reader (select products only)	Allows a fingerprint logon to Windows, instead of a password logon.	
		Swipe down across the fingerprint reader. IMPORTANT: To prevent fingerprint logon issues, make sure when you register your fingerprint that all sides of your finger are registered by the fingerprint reader.	

Special keys

Identify the special keys.

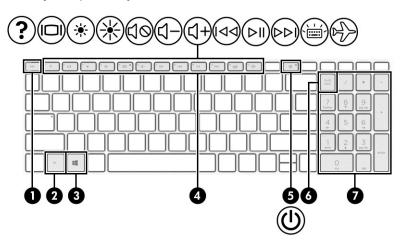


Table 2-7 Special keys and their descriptions

Compo	nent		Description
(1)		esc key	Displays system information when pressed in combination with the fn key.
(2)		fn key	Executes specific functions when pressed in combination with another key.
(3)		Windows key	Opens the Start menu.
			NOTE: Pressing the Windows key again will close the Start menu.
(4)		Action keys	Execute frequently used system functions as defined by the icon symbols on f1 through f12 function keys.
(5)	()	Power button	 When the computer is off, press the button briefly to turn on the computer.
			 When the computer is on, press the button briefly to initiate Sleep.
			 When the computer is in the Sleep state, press the button briefly to exit Sleep (select products only).

Table 2-7 Special keys and their descriptions (continued)

Component		Description
		 When the computer is in Hibernation, press the button briefly to exit Hibernation.
		IMPORTANT: Pressing and holding down the power button results in the loss of unsaved information.
		If the computer has stopped responding and shutdown procedures are ineffective, press and hold the power button down for at least 10 seconds to turn off the computer.
		To learn more about your power settings, see your power options:
		Right-click the Power icon , and then select Power
		Options.
(6)	num lock key	Alternates between the navigational and numeric functions on the integrated numeric keypad.
(7)	Integrated numeric keypad	A separate keypad to the right of the alphabet keyboard. When num lock is pressed, the keypad can be used like an external numeric keypad.
		NOTE: If the keypad function is active when the computer is turned off, that function is reinstated when the computer is turned back on.

Bottom



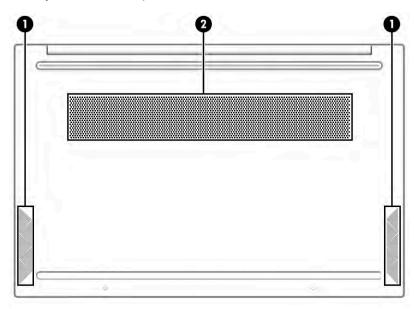


Table 2-8 Bottom components and their descriptions

Component		Description	
(1)	Speakers (2)	Produce sound.	
(2)	Vent	Enables airflow to cool internal components.	
		NOTE: The computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.	

Labels

The labels affixed to the computer provide information that you might need when you troubleshoot system problems or travel internationally with the computer. Labels can be in paper form or imprinted on the product.

- **IMPORTANT:** Check the following locations for the labels described in this section: the bottom of the computer, inside the battery bay, under the service door, on the back of the display, or on the bottom of a tablet kickstand.
 - Service label—Provides important information to identify your computer. When contacting support, you
 might be asked for the serial number, the product number, or the model number. Locate this
 information before you contact support.

Your service label will resemble one of the following examples. Refer to the illustration that most closely matches the service label on your computer.



Table 2-9 Service label components

Comp	Component	
(1)	Serial number	
(2)	Product ID	
(3)	HP product name and model number	

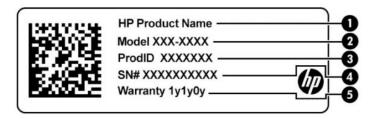


Table 2-10 Service label components

Comp	Component	
(1)	HP product name	
(2)	Model number	
(3)	Product ID	
(4)	Serial number	
(5)	Warranty period	

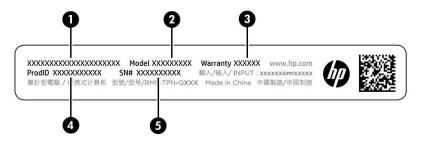


Table 2-11 Service label components

Comp	Component	
(1)	HP product name	
(2)	Model number	
(3)	Warranty period	
(4)	Product ID	
(5)	Serial number	

- Regulatory labels—Provide regulatory information about the computer.
- Wireless certification labels—Provide information about optional wireless devices and the approval markings for the countries or regions in which the devices have been approved for use.

Illustrated parts catalog

Use this table to determine the spare parts that are available for the computer.

NOTE: HP continually improves and changes product parts. For complete and current information about supported parts for your computer, go to http://partsurfer.hp.com, select your country or region, and then follow the on-screen instructions.

Computer major components

To identify the computer major components, use this illustration and table.

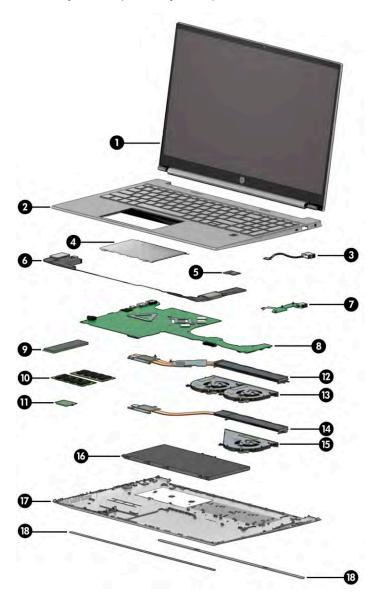


Table 3-1 Computer major component descriptions and part numbers

ltem	Component	Spare part number		
(1)	Display assembly	not available as a		
	NOTE: Display assemblies are offered as spare parts only at a subcomponent level. For more information, see <u>Display assembly subcomponents on page 19</u> .	spare part		
2)	Keyboard/top cover			
	For a detailed list of country codes, see <u>Top cover with keyboard on page 58</u> .			
	Models with a card reader			
	Natural silver, fingerprint reader, backlit	M08910-xx1		
	Natural silver, fingerprint reader, not backlit	M08911-xx1		
	Natural silver, no fingerprint reader, backlit	M08912-xx1		
	Natural silver, no fingerprint reader, not backlit	M08913-xx1		
	Cloud blue, fingerprint reader, backlit	M08918-xx1		
	Cloud blue, fingerprint reader, not backlit	M08919-xx1		
	Cloud blue, no fingerprint reader, backlit	M08920-xx1		
	Cloud blue, no fingerprint reader, not backlit	M08921-xx1		
	Luminous gold, fingerprint reader, backlit	M08922-xx1		
	Luminous gold, fingerprint reader, not backlit	M08923-xx1		
	Luminous gold, no fingerprint reader, backlit	M08924-xx1		
	Luminous gold, no fingerprint reader, not backlit	M08925-xx1		
	Light teal, fingerprint reader, backlit	M08926-xx1		
	Light teal, fingerprint reader, not backlit	M08927-xx1		
	Light teal, no fingerprint reader, backlit	M08928-xx1		
	Light teal, no fingerprint reader, not backlit	M08929-xx1		
	Models without a card reader			
	Natural silver, fingerprint reader, backlit	M76638-001		
	Natural silver, fingerprint reader, not backlit	M76639-001		
	Natural silver, no fingerprint reader, backlit	M76640-001		
	Natural silver, no fingerprint reader, not backlit	M76641-001		
	Cloud blue, fingerprint reader, backlit	M76642-001		
	Cloud blue, fingerprint reader, not backlit	M76643-001		
	Cloud blue, no fingerprint reader, backlit	M76644-001		
	Cloud blue, no fingerprint reader, not backlit	M76645-001		
	Luminous gold, fingerprint reader, backlit	M76646-001		
	Luminous gold, fingerprint reader, not backlit	M76647-001		
	Luminous gold, no fingerprint reader, backlit	M76648-001		

Table 3-1 Computer major component descriptions and part numbers (continued)

ltem	Component	Spare part number
	Luminous gold, no fingerprint reader, not backlit	M76649-001
	Light teal, fingerprint reader, backlit	M76650-001
	Light teal, fingerprint reader, not backlit	M76651-001
	Light teal, no fingerprint reader, backlit	M76652-001
	Light teal, no fingerprint reader, not backlit	M76653-001
(3)	Power connector (DC-in) cable	M08887-001
(4)	Touchpad	
	NOTE: The touchpad cable is available using spare part number M08876-001.	
	Fog blue	M08872-001
	Forest teal	M08873-001
	Natural silver	M08874-001
	Warm gold	M08875-001
(5)	Fingerprint reader	
	NOTE: The fingerprint reader cable is available using spare part number M08883-001.	
	Fog blue	M08878-001
	Forest teal	M08879-001
	Natural silver	M08880-001
	Warm gold	M08881-001
(6)	Speakers (left and right)	M08943-001
(7)	USB board	M16335-001
	NOTE: The USB board cable is available using spare part number M08870-001.	
(8)	System board (includes processor)	
	All system boards use the following part numbers:	
	xxxxxx-001: Non-Windows operating system	
	xxxxxx-601: Windows 10 operating system	
	For use in models with unified memory architecture (UMA) graphics memory:	
	Intel Core i7-1195G7 processor	M74949-xx1
	Intel Core i5-1155G7 processor	M74948-xx1
	For use in models with discrete graphics memory:	
	Intel Core i7-1195G7 processor and NVIDIA GeForce MX450 graphics	M74947-xx1
	Intel Core i5-1155G7 processor and NVIDIA GeForce MX450 graphics	M74946-xx1
	Intel Core i5-1155G7 processor and NVIDIA GeForce MX350 graphics	M74945-xx1
(9)	Solid-state drive	

Table 3-1 Computer major component descriptions and part numbers (continued)

ltem	Component	Spare part number
	1 TB solid-state drive + 32 GB Optane memory	L85374-005
	512 GB, PCle	L85364-005
	512 GB solid-state drive + 32 GB Optane memory	L85366-005
	256 GB, PCIe	L85354-005
	256 GB solid-state drive + 16 GB Optane memory	L85356-005
(10)	Memory modules (DDR4-3200)	
	8 GB	L46598-005
	4 GB	L83673-005
(11)	WLAN module	
	Intel Wireless AC-9461 802.11ac 1 × 1 Wi-Fi + Bluetooth 5.1	L25889-005
	Intel Wi-Fi 6 AX201 802.11ax 2 × 2 Wi-Fi + Bluetooth 5 (non-vPro)	L92724-005
	Realtek 8852AE-VT Wi-Fi 6 Bluetooth 5.2 WLAN	M34029-005
	Realtek RTL8821CE 802.11b/g/n/a/ac (1 × 1) MU-MIMO supported and Bluetooth 4.2 combo	M09870-005
	Mediatek MT7921 Wi-Fi 6 Bluetooth 5.2 WLAN	M74879-005
(12)	Heat sink for use in models with UMA graphics memory (includes replacement thermal material)	M08944-001
(13)	Fan for use in models with UMA graphics memory	M08945-001
(14)	Heat sink for use in models with discrete graphics memory (includes replacement thermal material)	M16352-001
(15)	Fan for use in models with discrete graphics memory	M16351-001
(16)	Battery (3 cell, 41 Whr)	L97300-005
(17)	Bottom cover	
	Fog blue	M08889-001
	Forest teal	M08890-001
	Natural silver	M08891-001
	Warm gold	M08892-001
(18)	Rubber Foot Kit	
	Fog blue	M08894-001
	Forest teal	M08895-001
	Natural silver	M08896-001
	Warm gold	M08897-001

Display assembly subcomponents

To identify the display assembly subcomponents, use this illustration and table.

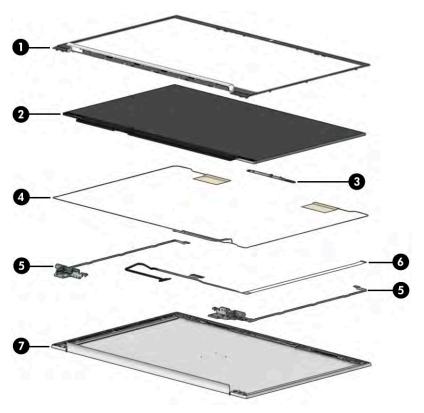


Table 3-2 Display component descriptions and part numbers

ltem	Component	Spare part number		
(1)	Display bezel			
	Ceramic white	M33441-001		
	Fog blue	M33442-001		
	Forest teal	M33443-001		
	Natural silver	M33444-001		
	Warm gold	M33445-001		
(2)	Display panel (includes display panel adhesive and display bezel adhesive)			
	Antiglare, UWVA, FHD, 250 nits	M16339-001		
	Antiglare, UWVA, FHD, 300 nits	M16340-001		
	Antiglare, SVA, FHD, 250 nits	M16337-001		
	BrightView, UWVA, FHD, 250 nits	M16341-001		
	BrightView, UWVA, FHD, Touch-On Panel (TOP), 250 nits	M16342-001		
(3)	Camera module (includes display panel adhesive kit)	M08908-001		
(4)	Wireless antenna kits (includes display panel adhesive kit)			
	Single antenna	M13002-001		
	Dual antennas	M08903-001		
(5)	Hinges (includes left and right display hinges; includes display bezel adhesive)	M08904-001		

Table 3-2 Display component descriptions and part numbers (continued)

Item	Component	Spare part number
(6)	Display panel cable (includes display panel adhesive and display bezel adhesive)	
	For use with nontouch panels	M08907-001
	For use with touch screen panels	M08906-001
(7)	7) Display back cover (includes display bezel adhesive)	
	Ceramic white	M08898-001
	Fog blue	M08899-001
	Forest teal	M08900-001
	Natural silver	M08901-001
	Warm gold	M08902-001
	Adhesive kit (includes display panel adhesive and display bezel adhesive; not illustrated)	M26981-001

Cables

To identify the cables, use this illustration and table.

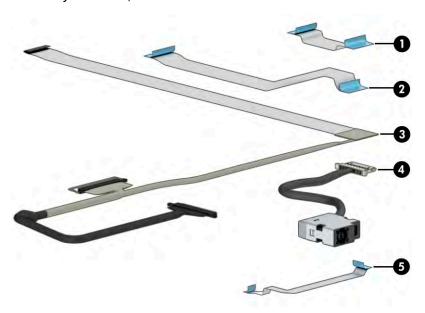


Table 3-3 Cable descriptions and part numbers

ltem	Component	Spare part number
(1)	USB board cable	M08870-001
(2)	Touchpad cable	M08876-001
(3)	Display/camera cable	
	Touch	M08906-001
	Nontouch	M08907-001

Table 3-3 Cable descriptions and part numbers (continued)

ltem	Component	Spare part number
(4)	Power connector cable	M08887-001
(5)	Fingerprint reader board cable	M08883-001

Miscellaneous parts

To identify the miscellaneous parts, use this table.

Table 3-4 Miscellaneous part descriptions and part numbers

Component	Spare part number
AC adapters	
65 W HP Smart AC adapter (non-power correction factor [PFC], 3 pin, 4.5 mm)	710412-001
65 W HP Smart AC adapter (non-PFC, EM, RC, 4.5 mm)	913691-850
45 W HP Smart AC adapter (non-PFC, RC, 4.5 mm, non-slim)	741727-001
Rubber Kit (for use in models with UMA graphics) (includes fan and Pogo rubber bumpers)	M39994-001
Screw Kit	M08909-001
Adhesive Kit	M26981-001
External DVD±RW drive	747080-001
HP HDMI-to-VGA adapter	701943-001
HP USB-C-to-VGA adapter	831751-001
HP USB Type-C-to-USB Type-A	833960-001
Hub, HP USB Type-C-to-USB Type-A	916838-001
Hub, HP USB-C-to-multiport	919666-001
Hub, HP Elite USB-C multiport	L39572-001
Power adapter (C5)	
Japan	L33157-001
Power cords (C5, 1.0 m [3.3 ft])	
Australia	L19358-001
Denmark	L19360-001
Europe (Austria, Belgium, Finland, France, Germany, the Netherlands, Norway, and Sweden)	L19361-001
India	L19363-001
Israel	L19362-001
Italy	L19364-001
Japan	L19365-001
North America	L19367-001
People's Republic of China	L19368-001

Table 3-4 Miscellaneous part descriptions and part numbers (continued)

Component	Spare part number
South Africa	L19369-001
South Korea	L19366-001
Switzerland	L19370-001
Taiwan	L19372-001
Thailand	L19371-001
United Kingdom	L19373-001

Removal and replacement procedures 4 preliminary requirements

Use this information to properly prepare to disassemble and reassemble the computer.

Tools required

You need the following tools to complete the removal and replacement procedures:

- **Tweezers**
- Nonconductive, nonmarking pry tool
- Magnetic Phillips P1 screwdriver

Service considerations

The following sections include some of the considerations that you must keep in mind during disassembly and assembly procedures.



NOTE: As you remove each subassembly from the computer, place the subassembly (and all accompanying screws) away from the work area to prevent damage.

Plastic parts

Using excessive force during disassembly and reassembly can damage plastic parts.

Cables and connectors

Handle cables with extreme care to avoid damage.

IMPORTANT: When servicing the computer, be sure that cables are placed in their proper locations during the reassembly process. Improper cable placement can damage the computer.

Apply only the tension required to unseat or seat the cables during removal and insertion. Handle cables by the connector whenever possible. In all cases, avoid bending, twisting, or tearing cables. Be sure that cables are routed so that they cannot be caught or snagged as you remove or replace parts. Handle flex cables with extreme care; these cables tear easily.

Drive handling

Note the following guidelines when handling drives.

IMPORTANT: Drives are fragile components. Handle them with care. To prevent damage to the computer, damage to a drive, or loss of information, observe these precautions:

Before removing or inserting a hard drive, shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.

Before handling a drive, be sure that you are discharged of static electricity. While handling a drive, avoid touching the connector.

Before removing an optical drive, be sure that a disc is not in the drive, and be sure that the optical drive tray is closed.

Handle drives on surfaces covered with at least 2.54 cm (1 inch) of shock-proof foam.

Avoid dropping drives from any height onto any surface.

After removing a hard drive or an optical drive, place it in a static-proof bag.

Avoid exposing an internal hard drive to products that have magnetic fields, such as monitors or speakers.

Avoid exposing a drive to temperature extremes or liquids.

If a drive must be mailed, place the drive in a bubble pack mailer or other suitable form of protective packaging, and label the package "FRAGILE."

Electrostatic discharge information

A sudden discharge of static electricity from your finger or other conductor can destroy static-sensitive devices or microcircuitry. Often the spark is neither felt nor heard, but damage occurs. An electronic device exposed to electrostatic discharge (ESD) might not appear to be affected at all and can work perfectly throughout a normal cycle. The device might function normally for a while, but it has been degraded in the internal layers, reducing its life expectancy.

Networks built into many integrated circuits provide some protection, but in many cases, the discharge contains enough power to alter device parameters or melt silicon junctions.

IMPORTANT: To prevent damage to the device when you remove or install internal components, observe these precautions:

Keep components in their electrostatic-safe containers until you are ready to install them.

Before touching an electronic component, discharge static electricity by using the guidelines described Personal grounding methods and equipment on page 26.

Avoid touching pins, leads, and circuitry. Handle electronic components as little as possible.

If you remove a component, place it in an electrostatic-safe container.

Generating static electricity

Follow these static electricity guidelines.

- Different activities generate different amounts of static electricity.
- Static electricity increases as humidity decreases.

Table 4-1 Static electricity occurrence based on activity and humidity

	Relative humidity		
Event	55%	40%	10%
Walking across carpet	7,500 V	15,000 V	35,000 V

Table 4-1 Static electricity occurrence based on activity and humidity (continued)

	Relative humidity		
Event	55%	40%	10%
Walking across vinyl floor	3,000 V	5,000 V	12,000 V
Motions of bench worker	400 V	800 V	6,000 V
Removing DIPs (dual in-line packages) from plastic tube	400 V	700 V	2,000 V
Removing DIPs from vinyl tray	2,000 V	4,000 V	11,500 V
Removing DIPs from polystyrene foam	3,500 V	5,000 V	14,500 V
Removing bubble pack from PCB (printed circuit board)	7,000 V	20,000 V	26,500 V
Packing PCBs in foam-lined box	5,000 V	11,000 V	21,000 V
Multiple electric components can be packaged together in plastic tubes, trays, or polystyrene foam.			

NOTE: As little as 700 V can degrade a product.

Preventing electrostatic damage to equipment

Many electronic components are sensitive to ESD. Circuitry design and structure determine the degree of sensitivity. The following packaging and grounding precautions are necessary to prevent static electricity damage to electronic components.

- To avoid hand contact, transport products in static-safe containers such as tubes, bags, or boxes.
- Protect all electrostatic parts and assemblies with conductive or approved containers or packaging.
- Keep electrostatic-sensitive parts in their containers until they arrive at static-free stations.
- Place items on a grounded surface before removing them from their container.
- Always be properly grounded when touching a sensitive component or assembly.
- Avoid contact with pins, leads, or circuitry.
- Place reusable electrostatic-sensitive parts from assemblies in protective packaging or conductive foam.

Personal grounding methods and equipment

Using certain equipment can prevent static electricity damage to electronic components.

- Wrist straps are flexible straps with a maximum of 1 M Ω ±10% resistance in the ground cords. To provide proper ground, a strap must be worn snug against bare skin. The ground cord must be connected and fit snugly into the banana plug connector on the grounding mat or workstation.
- Heel straps/Toe straps/Boot straps can be used at standing workstations and are compatible with most types of shoes or boots. On conductive floors or dissipative floor mats, use them on both feet with a maximum of 1 M Ω ±10% resistance between the operator and ground.

Table 4-2 Static shielding protection levels

Static shielding protection levels		
Method	Voltage	
Antistatic plastic	1,500	
Carbon-loaded plastic	7,500	
Metallized laminate	15,000	

Grounding the work area

To prevent static damage at the work area, follow these precautions.

- Cover the work surface with approved static-dissipative material.
- Use a wrist strap connected to a properly grounded work surface and use properly grounded tools and equipment.
- Use static-dissipative mats, foot straps, or air ionizers to give added protection.
- Handle electrostatic sensitive components, parts, and assemblies by the case or PCB laminate. Handle them only at static-free work areas.
- Turn off power and input signals before inserting and removing connectors or test equipment.
- Use fixtures made of static-safe materials when fixtures must directly contact dissipative surfaces.
- Keep the work area free of nonconductive materials, such as ordinary plastic assembly aids and polystyrene foam.
- Use conductive field service tools, such as cutters, screwdrivers, and vacuums.
- Avoid contact with pins, leads, or circuitry.

Recommended materials and equipment

HP recommends certain materials and equipment to prevent static electricity.

- Antistatic tape
- Antistatic smocks, aprons, or sleeve protectors
- Conductive bins and other assembly or soldering aids
- Conductive foam
- Conductive tabletop workstations with ground cord of 1 M Ω ±10% resistance
- Static-dissipative table or floor mats with hard tie to ground
- Field service kits
- Static awareness labels
- Wrist straps and footwear straps providing 1 MΩ ±10% resistance
- Material handling packages
- Conductive plastic bags
- Conductive plastic tubes

- Conductive tote boxes
- Opaque shielding bags
- Transparent metallized shielding bags
- Transparent shielding tubes

Cleaning your computer

Cleaning your computer regularly removes dirt and debris so that your device continues to operate at its best. Use the following information to safely clean the external surfaces of your computer.

Enabling HP Easy Clean (select products only)

HP Easy Clean helps you to avoid accidental input while you clean the computer surfaces. This software disables devices such as the keyboard, touch screen, and touchpad for a preset amount of time so that you can clean all computer surfaces.

- 1. Start HP Easy Clean in one of the following ways:
 - Select the Start menu, and then select HP Easy Clean.
 - or -
 - Select the **HP Easy Clean** icon in the taskbar.
 - or –
 - Select **Start**, and then select the **HP Easy Clean** tile.
- 2. Now that your device is disabled for a short period, see Removing dirt and debris from your computer on page 28 for the recommended steps to clean the high-touch, external surfaces on your computer. After you remove the dirt and debris, you can also clean the surfaces with a disinfectant. See Cleaning your computer with a disinfectant on page 29 for guidelines to help prevent the spread of harmful bacteria and viruses.

Removing dirt and debris from your computer

Here are the recommended steps to clean dirt and debris from your computer.

For computers with wood veneer, see Caring for wood veneer (select products only) on page 30.

- Wear disposable gloves made of latex (or nitrile gloves, if you are latex-sensitive) when cleaning the surfaces.
- 2. Turn off your device and unplug the power cord and other connected external devices. Remove any installed batteries from items such as wireless keyboards.
 - CAUTION: To prevent electric shock or damage to components, never clean a product while it is turned on or plugged in.
- 3. Moisten a microfiber cloth with water. The cloth should be moist, but not dripping wet.
- **IMPORTANT:** To avoid damaging the surface, avoid abrasive cloths, towels, and paper towels.
- 4. Wipe the exterior of the product gently with the moistened cloth.

- IMPORTANT: Keep liquids away from the product. Avoid getting moisture in any openings. If liquid makes its way inside your HP product, it can cause damage to the product. Do not spray liquids directly on the product. Do not use aerosol sprays, solvents, abrasives, or cleaners containing hydrogen peroxide or bleach that might damage the finish.
- 5. Start with the display (if applicable). Wipe carefully in one direction, and move from the top of the display to the bottom. Finish with any flexible cables, like power cord, keyboard cable, and USB cables.
- 6. Be sure that surfaces have completely air-dried before turning the device on after cleaning.
- 7. Discard the gloves after each cleaning. Clean your hands immediately after you remove the gloves.

See <u>Cleaning your computer with a disinfectant on page 29</u> for recommended steps to clean the high-touch, external surfaces on your computer to help prevent the spread of harmful bacteria and viruses.

Cleaning your computer with a disinfectant

The World Health Organization (WHO) recommends cleaning surfaces, followed by disinfection, as a best practice for preventing the spread of viral respiratory illnesses and harmful bacteria.

After cleaning the external surfaces of your computer using the steps in Removing dirt and debris from your computer on page 28, Caring for wood veneer (select products only) on page 30, or both, you might also choose to clean the surfaces with a disinfectant. A disinfectant that is within HP's cleaning guidelines is an alcohol solution consisting of 70% isopropyl alcohol and 30% water. This solution is also known as rubbing alcohol and is sold in most stores.

Follow these steps when disinfecting high-touch, external surfaces on your computer:

- Wear disposable gloves made of latex (or nitrile gloves, if you are latex-sensitive) when cleaning the surfaces.
- 2. Turn off your device and unplug the power cord and other connected external devices. Remove any installed batteries from items such as wireless keyboards.
 - CAUTION: To prevent electric shock or damage to components, never clean a product while it is turned on or plugged in.
- 3. Moisten a microfiber cloth with a mixture of 70% isopropyl alcohol and 30% water. The cloth should be moist, but not dripping wet.
 - CAUTION: Do not use any of the following chemicals or any solutions that contain them, including spray-based surface cleaners: bleach, peroxides (including hydrogen peroxide), acetone, ammonia, ethyl alcohol, methylene chloride, or any petroleum-based materials, such as gasoline, paint thinner, benzene, or toluene.
 - **IMPORTANT:** To avoid damaging the surface, avoid abrasive cloths, towels, and paper towels.
- **4.** Wipe the exterior of the product gently with the moistened cloth.
 - IMPORTANT: Keep liquids away from the product. Avoid getting moisture in any openings. If liquid makes its way inside your HP product, it can cause damage to the product. Do not spray liquids directly on the product. Do not use aerosol sprays, solvents, abrasives, or cleaners containing hydrogen peroxide or bleach that might damage the finish.
- 5. Start with the display (if applicable). Wipe carefully in one direction, and move from the top of the display to the bottom. Finish with any flexible cables, like power cord, keyboard cable, and USB cables.
- 6. Be sure that surfaces have completely air-dried before turning the device on after cleaning.
- 7. Discard the gloves after each cleaning. Clean your hands immediately after you remove the gloves.

Caring for wood veneer (select products only)

Your product might feature high-quality wood veneer. As with all natural wood products, proper care is important for best results over the life of the product. Because of the nature of natural wood, you might see unique variations in the grain pattern or subtle variations in color, which are normal.

- Clean the wood with a dry, static-free microfiber cloth or chamois.
- Avoid cleaning products containing substances such as ammonia, methylene chloride, acetone, turpentine, or other petroleum-based solvents.
- Do not expose the wood to sun or moisture for long periods of time.
- If the wood becomes wet, dry it by dabbing with an absorbent, lint-free cloth.
- Avoid contact with any substance that might dye or discolor the wood.
- Avoid contact with sharp objects or rough surfaces that might scratch the wood.

See Removing dirt and debris from your computer on page 28 for the recommended steps to clean the high-touch, external surfaces on your computer. After you remove the dirt and debris, you can also clean the surfaces with a disinfectant. See Cleaning your computer with a disinfectant on page 29 for sanitizing guidelines to help prevent the spread of harmful bacteria and viruses.

Packaging and transporting guidelines

Follow these grounding guidelines when packaging and transporting equipment.

- To avoid hand contact, transport products in static-safe tubes, bags, or boxes.
- Protect ESD-sensitive parts and assemblies with conductive or approved containers or packaging.
- Keep ESD-sensitive parts in their containers until the parts arrive at static-free workstations.
- Place items on a grounded surface before removing items from their containers.
- Always be properly grounded when touching a component or assembly.
- Store reusable ESD-sensitive parts from assemblies in protective packaging or nonconductive foam.
- Use transporters and conveyors made of antistatic belts and roller bushings. Be sure that mechanized
 equipment used for moving materials is wired to ground and that proper materials are selected to avoid
 static charging. When grounding is not possible, use an ionizer to dissipate electric charges.

Accessing support information

Use this information to find the HP support that you need.

Table 4-3 Support information locations

Service consideration	Path to access information	
Records of reported failure incidents stored	Windows: Pre-operating system failures are logged in the BIOS Event Log. To view the BIOS Event Log:	
on the computer		
	1. Press the power button.	
	2. Immediately and repeatedly press esc when the power button light turns white.	

Table 4-3 Support information locations (continued)

Service consideration	Path to access information	
	NOTE: If you do not press esc at the appropriate time, you must restart the computer and again repeatedly press esc when the power button light turns white to access the utility.	
	3. Press f10 to enter the BIOS setup.	
	(On commercial products) Under the Main tab, select BIOS event log, and then select View BIOS Event Log.	
	- or -	
	(On consumer products) Under the Main tab, select System Log .	
	Post operating system failures are logged in the Event Viewer.	
	1. Turn on the computer and allow the operating system to open.	
	2. Click the search icon in the taskbar.	
	3. Type Event Viewer, and then press enter.	
	4. Select the log from the left panel. Details display in the right panel.	
	Chrome:	
	1. Go to support.google.com/chrome.	
	2. Search collect Chrome device logs.	
Technical bulletins	To locate technical bulletins:	
	1. Go to www.hp.com.	
	2. Place the cursor over Problem solving to display more options.	
	3. Select Support & Troubleshooting.	
	Type the serial number, product number, or product name to go to the product support page.	
	5. Select Advisories to view technical bulletins.	
Repair professionals	To locate repair professionals:	
	1. Go to www.hp.com.	
	2. Place the cursor over Support resources to display more options.	
	3. Select Authorized service providers.	
Component and diagnosis information, failure	To locate diagnosis information and actions:	
detection, and required action	1. Go to http://www.hp.com/go/techcenter/pcdiags .	
	2. Select Get Support.	
	Near the bottom of the window, select Notebook PCs, and then select your location.	

5 Removal and replacement procedures for authorized service provider parts

This chapter provides removal and replacement procedures for authorized service provider parts.

- **IMPORTANT:** Components described in this chapter should be accessed only by an authorized service provider. Accessing these parts can damage the computer or void the warranty.
- **NOTE:** Details about your computer, including model, serial number, product key, and length of warranty, are on the service tag at the bottom of your computer.

Component replacement procedures

To remove and replace computer components, use these procedures.

NOTE: HP continually improves and changes product parts. For complete and current information about supported parts for your computer, go to http://partsurfer.hp.com, select your country or region, and then follow the on-screen instructions.

You must remove, replace, or loosen as many as 50 screws when you service the parts described in this chapter. Make special note of each screw size and location during removal and replacement.

Preparation for disassembly

To remove and replace computer components, use these procedures.

See Removal and replacement procedures preliminary requirements on page 24 for initial safety procedures.

- Turn off the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect the power from the computer by unplugging the power cord from the computer.
- 3. Disconnect all external devices from the computer.

Bottom cover

To remove the bottom cover, use this procedure and illustration.

Table 5-1 Bottom cover description and part number

Description	Spare part number
Bottom cover, fog blue	M08889-001
Bottom cover, forest teal	M08890-001
Bottom cover, natural silver	M08891-001
Bottom cover, warm gold	M08892-001
Rubber feet, fog blue	M08894-001
Rubber feet, forest teal	M08895-001


Table 5-1 Bottom cover description and part number (continued)

Description	Spare part number
Rubber feet, natural silver	M08896-001
Rubber feet, warm gold	M08897-001


Before removing the bottom cover, prepare the computer for disassembly (Preparation for disassembly on page 32).

Remove the bottom cover:

- Remove the two rubber feet (1).
- 2. Remove the four Phillips M2.5 \times 6.5 screws (2) from under the feet and the two Phillips M2.0 \times 5.0 screws (3) along the bottom edge of the bottom cover.

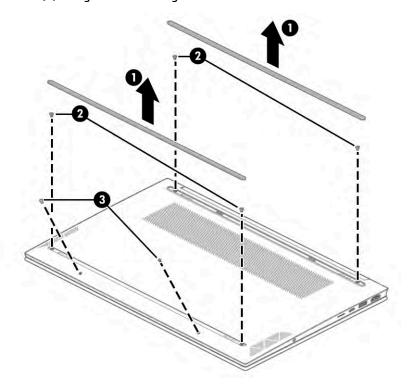

3. Starting near the hinges, use a plastic tool (1) to release the bottom cover from the computer (2).

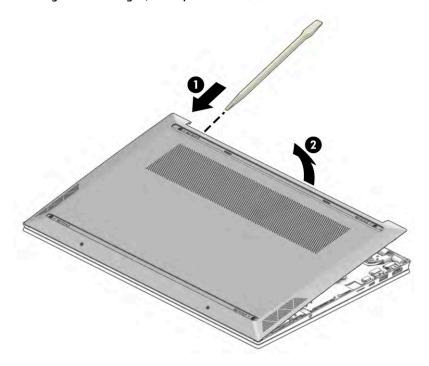

To replace the bottom cover, reverse the removal procedures.

Battery

To remove the battery, use this procedure and illustration.

Table 5-2 Battery description and part number

Description	Spare part number
3 cell, 41 Whr, Li-ion battery	L97300-005

MARNING! To avoid personal injury and damage to the product:

- Do not puncture, twist, or crack the battery.
- Do not cause an external puncture or rupture to the battery. They can cause a short inside the battery, which can result in battery thermal runaway.
- Do *not* handle or touch the battery enclosure with sharp objects such as tweezers or pliers, which might puncture the battery.
- Do *not* compress or squeeze the battery case with tools or heavy objects stacked on top of the case. These actions can apply undue force on the battery.
- Do *not* touch the connectors with any metallic surface or object, such as metal tools, screws, or coins, which can cause shorting across the connectors.


Before removing the battery, follow these steps:

- 1. Prepare the computer for disassembly (Preparation for disassembly on page 32).
- 2. Remove the bottom cover (<u>Bottom cover on page 32</u>).

- **WARNING!** To reduce potential safety issues, use only the user-replaceable battery provided with the computer, a replacement battery provided by HP, or a compatible battery purchased from HP.
- **IMPORTANT:** Removing a battery that is the sole power source for the computer can cause loss of information. To prevent loss of information, save your work or shut down the computer through Windows before you remove the battery.

Remove the battery:

- 1. Remove the six Phillips M2.0 × 4.0 screws (1) that secure the battery to the computer.
- 2. Rotate the bottom of the battery upward, and then remove it from the computer (2).

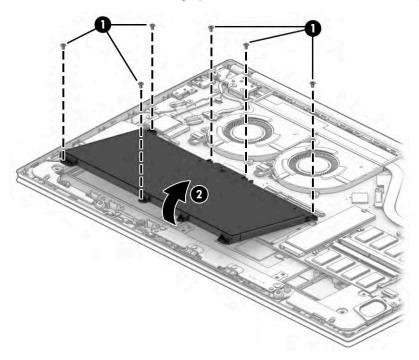

To replace the battery, reverse the removal procedures.

WLAN module

To remove the WLAN module, use this procedure and illustration.

Table 5-3 WLAN module descriptions and part numbers

Description	Spare part number
Intel Wireless AC-9461 802.11ac 1 × 1 Wi-Fi® + Bluetooth® 5.1	L25889-005
Intel Wi-Fi 6 AX201 802.11ax 2 × 2 Wi-Fi + Bluetooth 5 (non-vPro)	L92724-005
Realtek 8852AE-VT Wi-Fi 6 Bluetooth 5.2 WLAN	M34029-005
Realtek RTL8821CE 802.11b/g/n/a/ac (1 × 1) MU-MIMO supported and Bluetooth 4.2 combo	M09870-005
Mediatek MT7921 Wi-Fi 6 Bluetooth 5.2 WLAN	M74879-005


IMPORTANT: To prevent an unresponsive system, replace the wireless module only with a wireless module authorized for use in the computer by the governmental agency that regulates wireless devices in your country or region. If you replace the module and then receive a warning message, remove the module to restore device functionality, and then contact technical support.

Before removing the WLAN module, follow these steps:


- 1. Prepare the computer for disassembly (Preparation for disassembly on page 32).
- 2. Remove the bottom cover (Bottom cover on page 32).
- 3. Remove the battery (see <u>Battery on page 34</u>).

Remove the WLAN module:

- 1. Carefully disconnect the antenna cables from the module (1).
- 2. Remove the Phillips M2.0 × 2.5 screw (2), and then remove the WLAN module (3).
 - NOTE: Models have either one or two WLAN antennas. On models with two antennas, the #1 white WLAN antenna cable connects to the WLAN module #1 Main terminal. The #2 black WLAN antenna cable connects to the WLAN module #1 Aux terminal.

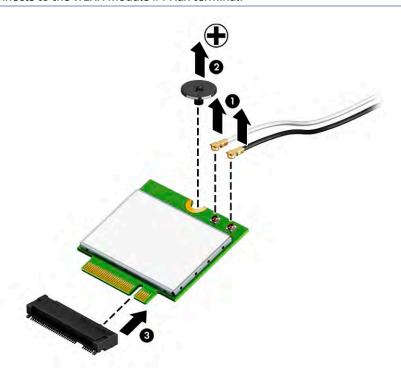

If the WLAN antenna is not connected to the terminal on the WLAN module, a protective sleeve must be installed on the antenna connector, as shown in the following illustration.

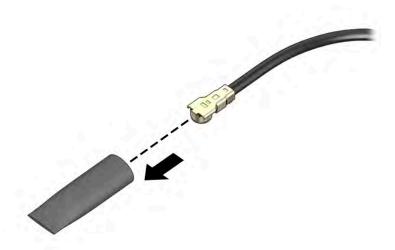

Reverse this procedure to install the WLAN module.

Solid-state drive

To remove the M.2 solid-state drive, use this procedure and illustration.

Table 5-4 Solid-state drive descriptions and part numbers

Description	Spare part number
1 TB, PCle	L85370-005
1 TB solid-state drive + 32 GB Optane memory	L85374-005
512 GB, PCle	L85364-005
512 GB solid-state drive + 32 GB Optane memory	L85366-005
256 GB, PCle	L85354-005
256 GB solid-state drive + 16 GB Optane memory	L85356-005


Before removing the solid-state drive, follow these steps:

- Prepare the computer for disassembly (Preparation for disassembly on page 32).
- 2. Remove the bottom cover (<u>Bottom cover on page 32</u>).
- Remove the battery (see <u>Battery on page 34</u>).


Remove the solid-state drive:

Remove the Phillips M2.0 × 2.5 screw (1) that secures the drive to the computer.

2. Pull the drive away from the socket to remove it (2).

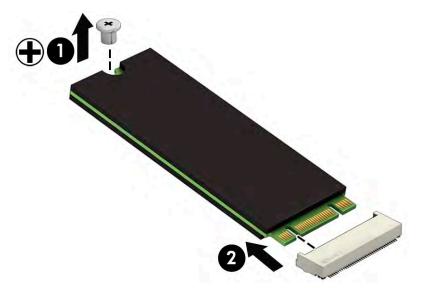

To install the solid-state drive, reverse the removal procedures.



Memory modules

To remove the memory modules, use this procedure and illustration.

Table 5-5 Memory module descriptions and part numbers


Description	Spare part number
Memory module, 8 GB (DDR4-3200)	L46598-005
Memory module, 4 GB (DDR4-3200)	L83673-005

Before removing the memory, follow these steps:

- 1. Prepare the computer for disassembly (<u>Preparation for disassembly on page 32</u>).
- 2. Remove the bottom cover (Bottom cover on page 32).
- 3. Remove the battery (see <u>Battery on page 34</u>).

If you are replacing a memory module, remove the existing memory module:


- ▲ Spread the two retention clips outward (1) until the memory module tilts up at a 45° angle, and then remove the module (2). Use the same procedure to remove all memory modules.
- **IMPORTANT:** To prevent damage to the memory module, hold the memory module by the edges only. Do not touch the components on the memory module.

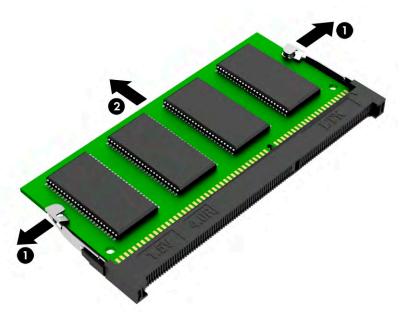

To protect a memory module after removal, place it in an electrostatic-safe container.

To install a memory module:

- 1. Align the notched edge of the module with the tab in the slot (1), and then press the module into the slot at an angle until it is seated (2).
- 2. Press down on the module until the side retention clips snap into place (3).

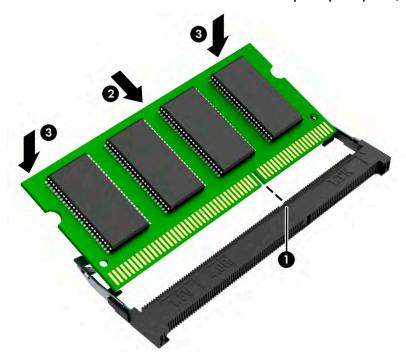

USB board

To remove the USB board, use this procedure and illustration.

Table 5-6 USB board description and part number


Description	Spare part number
USB board	M16335-001
USB board cable	M08870-001

Before removing the USB board, follow these steps:

- 1. Prepare the computer for disassembly (<u>Preparation for disassembly on page 32</u>).
- 2. Remove the bottom cover (Bottom cover on page 32).
- 3. Remove the battery (see <u>Battery on page 34</u>).

Remove the USB board:

- 1. Disconnect the cable from the ZIF connector on the USB board (1).
- 2. Remove the three Phillips $M2.0 \times 2.0$ screws (2) that secure the board to the computer.
- 3. Remove the board from the computer (3).

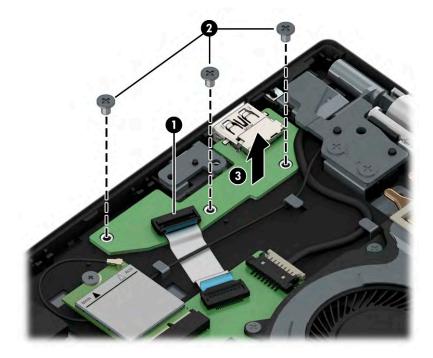

Reverse this procedure to install the USB board.

Speakers

To remove the speakers, use this procedure and illustration.

Table 5-7 Speaker description and part number


Description	Spare part number
Speaker Kit	M08943-001

Before removing the speakers, follow these steps:

- 1. Prepare the computer for disassembly (Preparation for disassembly on page 32).
- 2. Remove the bottom cover (Bottom cover on page 32).
- 3. Remove the battery (see <u>Battery on page 34</u>).

Remove the speakers:

- 1. Disconnect the speaker cable from the system board (1).
- 2. Remove the Phillips M2.0 × 3.0 screw from each speaker (2).
- **3.** Remove the speakers from the computer **(3)** and release the cable from the retention clips along the bottom of the computer.

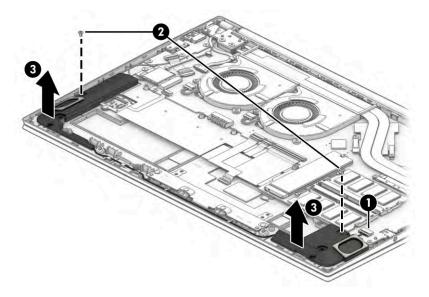

Reverse this procedure to install the speakers.

Fingerprint reader (select products only)

To remove the fingerprint reader, use this procedure and illustration.

Table 5-8 Fingerprint reader description and part number

Description	Spare part number
Fingerprint reader, fog blue	M08878-001
Fingerprint reader, forest teal	M08879-001
Fingerprint reader, natural silver	M08880-001
Fingerprint reader, warm gold	M08881-001
Fingerprint reader cable	M08883-001


Before removing the fingerprint reader, follow these steps:

- 1. Prepare the computer for disassembly (Preparation for disassembly on page 32).
- 2. Remove the bottom cover (Bottom cover on page 32).

- 3. Remove the battery (see <u>Battery on page 34</u>).
- 4. Remove the right speaker (see <u>Speakers on page 40</u>).

Remove the fingerprint reader:

- 1. Disconnect the cable from the ZIF connector on the fingerprint reader board (1).
- 2. Remove the Phillips M2.0 × 3.0 screw (2) that secures the fingerprint reader bracket to the computer.
- **3.** Remove the bracket from on top of the fingerprint reader (3).
- 4. Remove the fingerprint reader from the computer (4).

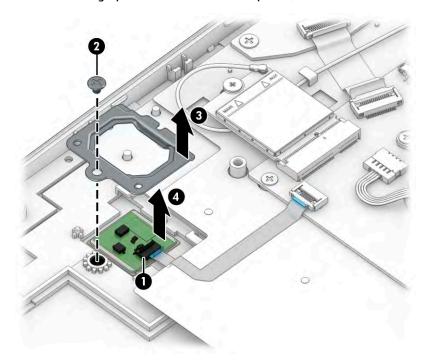

Reverse this procedure to install the fingerprint reader.

Fan

To remove the fan, use this procedure and illustration.

Table 5-9 Fan description and part number


Description	Spare part number
Fan for use in models with UMA graphics memory	M08945-001
Fan for use in models with discrete graphics memory	M16351-001

Before removing the fan, follow these steps:


- 1. Prepare the computer for disassembly (<u>Preparation for disassembly on page 32</u>).
- 2. Remove the bottom cover (Bottom cover on page 32).
- 3. Remove the battery (see <u>Battery on page 34</u>).

Remove the fan:

- **UMA models:** Remove the three Phillips M2.0 × 3.0 screws **(1)** that secure the fan to the computer. 1.
- 2. Disconnect the fan cable from the system board (2).
- 3. Remove the fan from the computer (3).

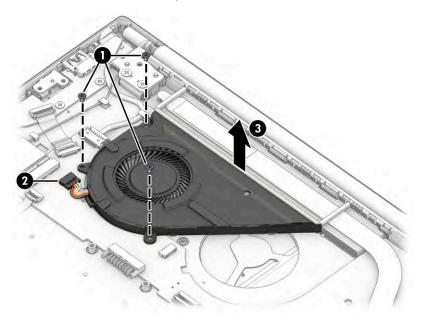

- **Discrete models:** Remove the six Phillips M2.0 × 3.0 screws (1) that secure the fans to the computer.
- Disconnect the fan cables from the system board (2). **5**.
- Remove the fans from the computer (3). 6.

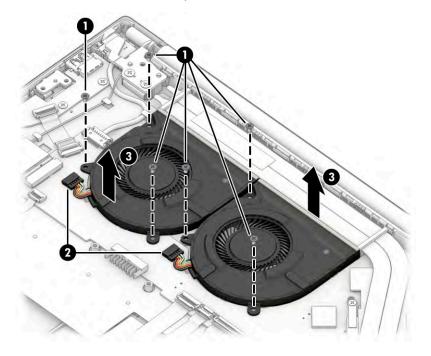

Reverse this procedure to install the fans.

Heat sink

To remove the heat sink, use these procedures and illustrations.

Table 5-10 Heat sink descriptions and part numbers


Description	Spare part number
Heat sink for use in models with UMA graphics memory	M08944-001
Heat sink for use in models with discrete graphics memory	M16352-001

Before removing the heat sink, follow these steps:

- 1. Prepare the computer for disassembly (<u>Preparation for disassembly on page 32</u>).
- 2. Remove the bottom cover (Bottom cover on page 32).
- **3.** Remove the battery (see <u>Battery on page 34</u>).


Remove the heat sink:

- 1. **UMA models:** In the order indicated on the heat sink, remove the three Phillips M2.0 × 2.0 screws (1) that secure the heat sink to the system board.
- 2. Remove the heat sink (2).

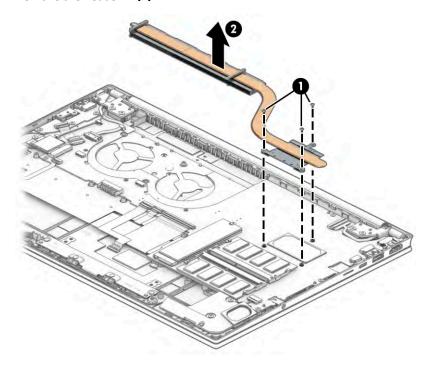


3. Thoroughly clean the thermal material from the surfaces of the heat sink and the system board components each time the heat sink is removed. Replacement thermal material is included with the heat sink and system board spare part kits.

Thermal paste is used on the integrated system board processor (1) and the heat sink (2).

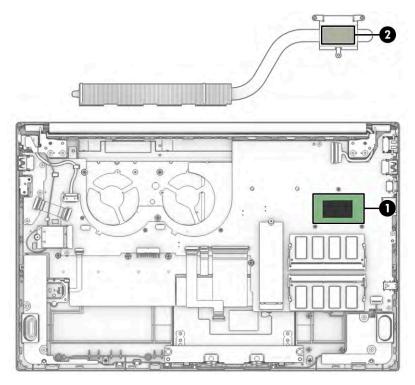


- **4. Discrete models:** In the order indicated on the heat sink, remove the five Phillips M2.0 × 2.0 screws **(1)** that secure the heat sink to the system board.
- 5. Remove the heat sink (2).

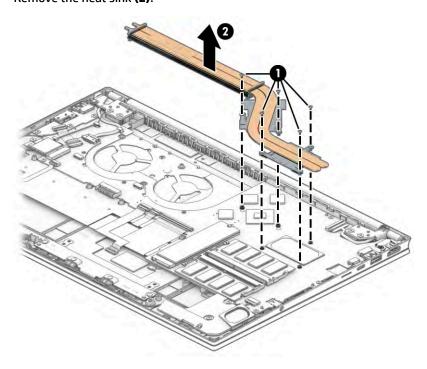

6. Thoroughly clean the thermal material from the surfaces of the heat sink and the system board components each time the heat sink is removed. Replacement thermal material is included with the heat sink and system board spare part kits.

Thermal paste is used on the system board (1) (3) and associated components on the heat sink (2) (4).

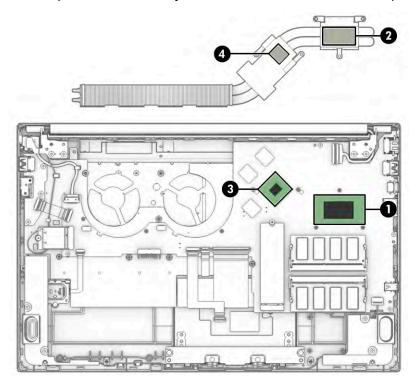

Reverse this procedure to install the heat sink.

System board

To remove the system board, use these procedures and illustrations.

Table 5-11 System board descriptions and part numbers

Description	Spare part number					
System board (includes processor):						
All system boards use the following part numbers:						
xxxxxx-001: Non-Windows operating system						
xxxxxx-601: Windows 10 operating system						
System board for use in models with UMA graphics memory:						
Intel Core i7-1195G7 processor	M74949-xx1					
Intel Core i5-1155G7 processor	M74948-xx1					
System board for use in models with discrete graphics memory:						
Intel Core i7-1195G7 processor and NVIDIA GeForce MX450 graphics	M74947-xx1					
Intel Core i5-1155G7 processor and NVIDIA GeForce MX450 graphics	M74946-xx1					
Intel Core i5-1155G7 processor and NVIDIA GeForce MX350 graphics	M74945-xx1					

Before removing the system board, follow these steps:


- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 32).
- 2. Remove the bottom cover (see <u>Bottom cover on page 32</u>).
- 3. Remove the battery (see <u>Battery on page 34</u>).
- 4. Remove the fan (see Fan on page 42).

When you replace the system board, be sure to remove the following components (as applicable) from the defective system board and install them on the replacement system board:

- Memory modules (see <u>Memory modules on page 38</u>).
- WLAN module (see WLAN module on page 35).
- Solid-state drive (see <u>Solid-state drive on page 37</u>).
- Heat sink (see Heat sink on page 44).


Remove the system board:

- 1. Disconnect the following cables from the system board:
 - WLAN antennas from the WLAN module (1)
 - Power connector (DC-in) board cable (2)
 - Display cable (ZIF) (3)
 - Speaker cable (4)
 - Keyboard cable (ZIF) (5)
 - Keyboard backlight cable (ZIF) (6) (select products only)
 - Touchpad cable (ZIF) (7)
 - USB board cable (ZIF) (8)
 - Fingerprint reader cable (ZIF) (9) (select products only)

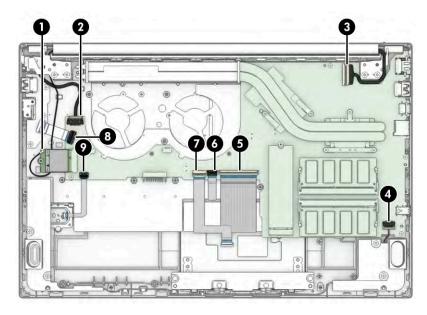

2. Remove the three Phillips M2.0 × 4.0 screws (1) that secure the system board to the computer.

- 3. Remove the Phillips M2.0 × 2.0 screw (2) that secures the system board to the computer.
- **4.** Lift the left side of system board **(3)**, and then pull the system board left and away from the connectors to remove it from the computer **(4)**.

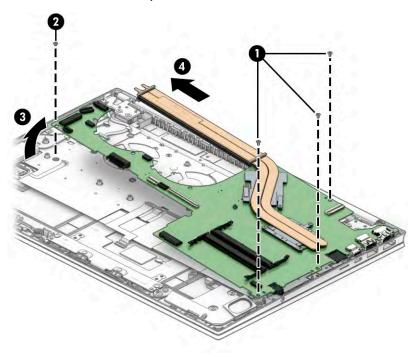

Reverse this procedure to install the system board.

Touchpad

To remove the touchpad, use this procedure and illustration.

Table 5-12 Touchpad description and part number


Description	Spare part number
Touchpad, fog blue	M08872-001
Touchpad, forest teal	M08873-001
Touchpad, natural silver	M08874-001
Touchpad, warm gold	M08875-001
Touchpad cable	M08876-001

Before removing the touchpad, follow these steps:


- 1. Prepare the computer for disassembly (see <u>Preparation for disassembly on page 32</u>).
- 2. Remove the bottom cover (see <u>Bottom cover on page 32</u>).
- 3. Remove the battery (see <u>Battery on page 34</u>).
- 4. Remove the fan (see Fan on page 42).
- 5. Remove the system board (see System board on page 46).

Remove the touchpad:

1. Remove the four Phillips M2.0 × 2.0 screws (1) from the touchpad bracket, and then remove the bracket from the computer (2).

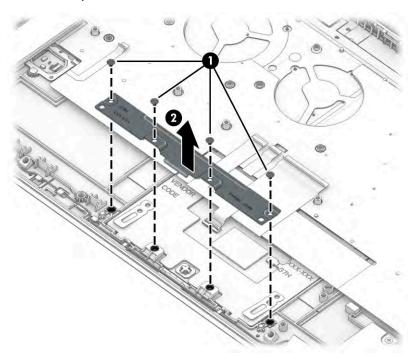

- **2.** Remove the black protective tape from on top of the screws (1).
- 3. Hold the keyboard cable up to allow access to the screws (2).
- **4.** Remove the three broadhead Phillips M2.0 × 2.0 screws **(3)** from the touchpad.
- 5. Pull the touchpad away from the bottom of the computer, and then remove it from the computer (4).

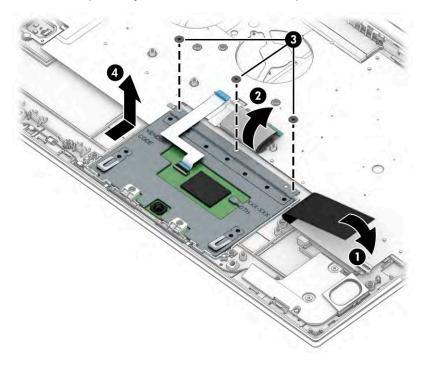

Reverse this procedure to install the touchpad.

Power connector cable

To remove the power connector cable, use this procedure and illustration.

Table 5-13 Power connector cable description and part number


Description	Spare part number
Power connector cable	M08887-001

Before removing the power connector cable, follow these steps:

- 1. Prepare the computer for disassembly (<u>Preparation for disassembly on page 32</u>).
- 2. Remove the bottom cover (<u>Bottom cover on page 32</u>).
- 3. Remove the battery (see <u>Battery on page 34</u>).

Remove the power connector cable:

- 1. Remove the two Phillips M2.5 × 6.5 screws (1) from the right hinge.
- 2. Rotate the hinge off the power connector (2).
- 3. Disconnect the power connector cable from the system board (3).
- **4.** Release the cable from the retention clip **(4)**.
- **5.** Remove the power connector cable from the computer **(5)**.

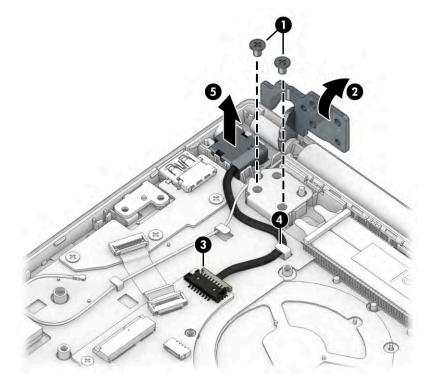

Reverse this procedure to install the power connector cable.

Display assembly

To remove and disassemble the display assembly, use these procedures and illustrations.


NOTE: The display assembly is available as a spare part at the subcomponent level. For display assembly spare part information, see the individual removal subsections.

Before removing the display panel, follow these steps:

- 1. Prepare the computer for disassembly (Preparation for disassembly on page 32).
- 2. Remove the bottom cover (Bottom cover on page 32).
- 3. Remove the battery (see <u>Battery on page 34</u>).
- 4. Remove the WLAN module (see WLAN module on page 35).


Remove the display assembly:

- 1. Disconnect the display cable from the system board ZIF connector (1).
- 2. Disconnect the WLAN antenna cables (2) from the terminals on the WLAN module.
 - NOTE: Models have either one or two WLAN antennas. On models with two antennas, the #1 white WLAN antenna cable connects to the WLAN module #1 Main terminal. The #2 black WLAN antenna cable connects to the WLAN module #1 Aux terminal.
- 3. Release the WLAN antenna cables from the retention clips (3).

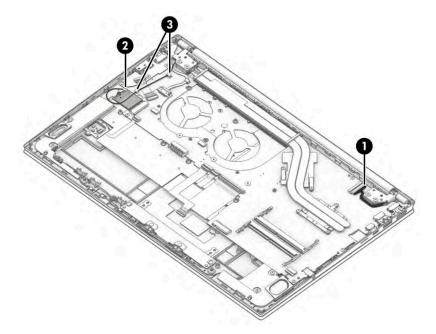

- 4. Remove the four Phillips M2.5 × 6.5 screws (1) that secure the display assembly to the computer.
- 5. Open the display to open the hinges (2).

6. Separate the display from the computer (3).

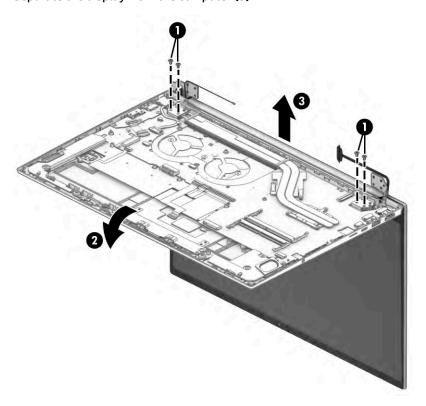

7. If you need to remove the display bezel:

- **a.** Use a flat, nonmarking tool **(1)** to release the top edge of the display bezel **(2)** from the display assembly.
- **b.** Release the left and right edges of the display bezel (3) from the display assembly.
- **c.** Release the bottom edge of the display bezel **(4)** from the display assembly.
- d. Remove the display bezel (5) from the display assembly.

Bezel adhesive is available in the Adhesive Kit as spare part number M26981-001.

The bezel is available as the following spare part numbers:


M33441-001: Ceramic white

M33442-001: Fog blue

M33443-001: Forest teal

M33444-001: Natural silver

M33445-001: Warm gold

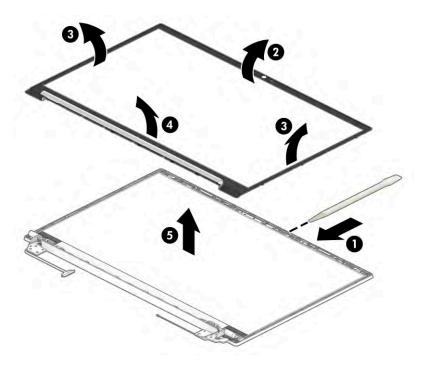

8. If you need to remove the display panel:

a. The display panel is secured to the display enclosure with tape that is installed under the left and right sides of the panel. To remove the panel, use tweezers to grasp the end of the tape (1). While turning the tweezers, wrap the tape around the tweezers as you continue to pull the tape out from behind the display panel (2). You must pull the tape multiple times before it is completely removed.

Rotate the display panel over and place it next to the display enclosure (3).

NOTE: Pull the tape out slowly and evenly to prevent it from breaking prematurely.


Display adhesive is available in the Adhesive Kit as spare part number M26981-001.

Display panels are available as the following spare part numbers:


M16339-001: Antiglare, UWVA, FHD, 250 nits M16340-001: Antiglare, UWVA, FHD, 300 nits M16337-001: Antiglare, SVA, FHD, 250 nits

M16342-001: BrightView, UWVA, FHD, Touch-On Panel (TOP), 250 nits


M16341-001: BrightView, UWVA, HD, 250 nits

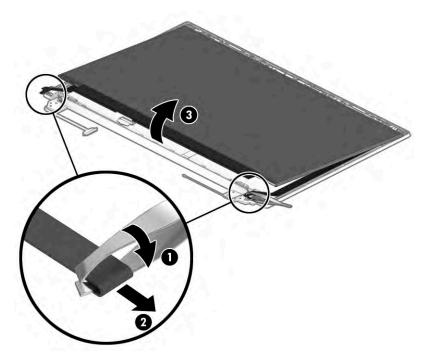

- Release the adhesive support strip (1) that secures the display panel cable connector to the display
- Disconnect the display panel cable (2) from the display panel, and then remove the display panel d. (3).

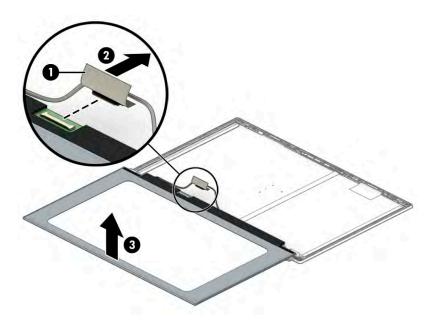

- If you need to remove the camera module:
 - Use a tool to detach the camera module (1) from the display back cover. (The module is attached with double-sided adhesive.)
 - Disconnect the cable from the module (2). Note that the cable routes under module. The camera module is available as spare part number M08908-001.

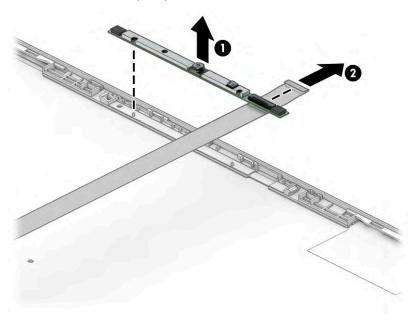


10. If you need to remove the display/camera cable, remove the cable from the routing along the bottom of the display rear cover **(1)**, and then peel the cable off the inside of the display back cover **(2)**.

Display panel cables are available as the following spare part numbers:


M08907-001: Nontouch display panels

M08906-001: Touch display panels

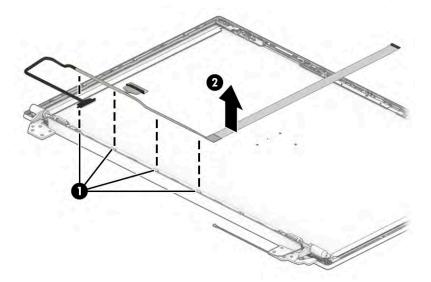

- 11. If you need to remove the hinges from the display rear cover:
 - **a.** Remove the Phillips M2.0 × 2.5 screw **(1)** from the top of each hinge.
 - **b.** Remove the three Phillips M2.0 \times 2.5 screws (2) from the bottom of each hinge.
 - **c.** Remove the Phillips M2.0 × 3.0 screw **(3)** from the inside-bottom of each hinge.
 - **d.** Remove the display hinges from the display back cover **(4)**.

The display hinges are available as spare part number M08904-001.

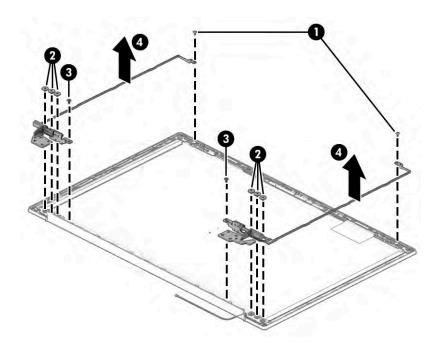


12. Peel the wireless antennas (1) off the display back cover. The antennas are secured with adhesive. Release the wireless antenna cables from the retention clips and routing channels built into the sides of the display back cover (2). Note that some models have only one antenna.

The wireless cables and antennas are available as spare part number M08903-001 for dual antennas or M13002-001 for single antennas.

Display back covers are available as the following spare part numbers:

M08898-001: Ceramic white

M08899-001: Fog blue M08900-001: Forest teal M08901-001: Natural silver M08902-001: Warm gold

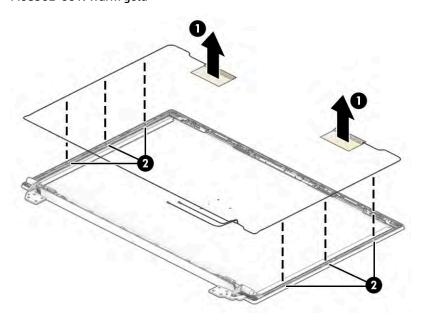

Reverse this procedure to reassemble and replace the display assembly.

Top cover with keyboard

The top cover with keyboard remains after removing all other spare parts from the computer. In this section, the first table provides the main spare part number for the top cover/keyboards. The second table provides the country codes.

Table 5-14 Top cover with keyboard descriptions and part numbers

Description	Spare part number
For use in models with a card reader	
Top cover with keyboard, natural silver, fingerprint reader, backlit	M08910-xx1
Top cover with keyboard, natural silver, fingerprint reader, not backlit	M08911-xx1
Top cover with keyboard, natural silver, no fingerprint reader, backlit	M08912-xx1
Top cover with keyboard, natural silver, no fingerprint reader, not backlit	M08913-xx1
Top cover with keyboard, cloud blue, fingerprint reader, backlit	M08918-xx1

Table 5-14 Top cover with keyboard descriptions and part numbers (continued)

Description	Spare part number
Top cover with keyboard, cloud blue, fingerprint reader, not backlit	M08919-xx1
Top cover with keyboard, cloud blue, no fingerprint reader, backlit	M08920-xx1
Top cover with keyboard, cloud blue, no fingerprint reader, not backlit	M08921-xx1
Top cover with keyboard, luminous gold, fingerprint reader, backlit	M08922-xx1
Top cover with keyboard, luminous gold, fingerprint reader, not backlit	M08923-xx1
Top cover with keyboard, luminous gold, no fingerprint reader, backlit	M08924-xx1
Top cover with keyboard, luminous gold, no fingerprint reader, not backlit	M08925-xx1
Top cover with keyboard, light teal, fingerprint reader, backlit	M08926-xx1
Top cover with keyboard, light teal, fingerprint reader, not backlit	M08927-xx1
Top cover with keyboard, light teal, no fingerprint reader, backlit	M08928-xx1
Top cover with keyboard, light teal, no fingerprint reader, not backlit	M08929-xx1
For use in models without a card reader	
Top cover with keyboard, natural silver, fingerprint reader, backlit	M76638-001
Top cover with keyboard, natural silver, fingerprint reader, not backlit	M76639-001
Top cover with keyboard, natural silver, no fingerprint reader, backlit	M76640-001
Top cover with keyboard, natural silver, no fingerprint reader, not backlit	M76641-001
Top cover with keyboard, cloud blue, fingerprint reader, backlit	M76642-001
Top cover with keyboard, cloud blue, fingerprint reader, not backlit	M76643-001
Top cover with keyboard, cloud blue, no fingerprint reader, backlit	M76644-001
Top cover with keyboard, cloud blue, no fingerprint reader, not backlit	M76645-001
Top cover with keyboard, luminous gold, fingerprint reader, backlit	M76646-001
Top cover with keyboard, luminous gold, fingerprint reader, not backlit	M76647-001
Top cover with keyboard, luminous gold, no fingerprint reader, backlit	M76648-001
Top cover with keyboard, luminous gold, no fingerprint reader, not backlit	M76649-001
Top cover with keyboard, light teal, fingerprint reader, backlit	M76650-001
Top cover with keyboard, light teal, fingerprint reader, not backlit	M76651-001
Top cover with keyboard, light teal, no fingerprint reader, backlit	M76652-001
Top cover with keyboard, light teal, no fingerprint reader, not backlit	M76653-001

Table 5-15 Spare part country codes

For use in country or region	Spare part number	For use in country or region	Spare part number	For use in country or region	Spare part number
Belgium	-A41	Iceland	-DD1	Slovenia	-BA1

Table 5-15 Spare part country codes (continued)

For use in country or region	Spare part number	For use in country or region	Spare part number	For use in country or region	Spare part number
Brazil	-201	India	-D61	South Korea	-AD1
Bulgaria	-261	Israel	-BB1	Spain	-071
Chile	-161	Italy	-061	Switzerland	-BG1
Czech Republic/Slovakia	-FL1	Japan	-291	Taiwan	-AB1
Denmark, Finland, and Norway	-DH1	The Netherlands	-B31	Thailand	-281
French Canada	-DB1	Northern Africa	-FP1	Turkey	-141
France	-051	Portugal	-131	Ukraine	-BD1
Germany	-041	Romania	-271	United Kingdom	-031
Greece	-151	Russia	-251	United States	-001
Hungary	-211	Saudi Arabia	-171		

6 Using Setup Utility (BIOS)

Setup Utility, or Basic Input/Output System (BIOS), controls communication between all the input and output devices on the system (such as disk drives, display, keyboard, mouse, and printer). Setup Utility (BIOS) includes settings for the types of devices installed, the startup sequence of the computer, and the amount of system and extended memory.

NOTE: To start Setup Utility on convertible computers, your computer must be in notebook mode and you must use the keyboard attached to your notebook.

Starting Setup Utility (BIOS)

You have several ways to access the Setup Utility (BIOS).

- **IMPORTANT:** Use extreme care when making changes in Setup Utility (BIOS). Errors can prevent the computer from operating properly.
 - Turn on or restart the computer and quickly press f10.

- or -

Turn on or restart the computer, quickly press esc, and then press f10 when the Start menu is displayed.

Updating Setup Utility (BIOS)

Updated versions of Setup Utility (BIOS) might be available on the HP website. Most BIOS updates on the HP website are packaged in compressed files called *SoftPaqs*. Some download packages contain a file named Readme.txt, which contains information regarding installing and troubleshooting the file.

Determining the BIOS version

To decide whether you need to update Setup Utility (BIOS), first determine the BIOS version on your computer.

To reveal the BIOS version information (also known as ROM date and System BIOS), use one of these options.

- HP Support Assistant
 - Select the Search icon in the taskbar, type support in the search box, and then select the HP Support Assistant app.

- or -

Select the guestion mark icon in the taskbar.

- 2. Under My notebook, select Specifications.
- Setup Utility (BIOS)
 - 1. Start Setup Utility (BIOS) (see <u>Starting Setup Utility (BIOS) on page 61</u>).
 - 2. Select Main, and then make note of the BIOS version.
 - 3. Select **Exit**, select one of the options, and then follow the on-screen instructions.
- In Windows, press ctrl+alt+s.

To check for later BIOS versions, see Preparing for a BIOS update on page 62.

Preparing for a BIOS update

Be sure to follow all prerequisites before downloading and installing a BIOS update.

- IMPORTANT: To reduce the risk of damage to the computer or an unsuccessful installation, download and install a BIOS update only when the computer is connected to reliable external power using the AC adapter. Do not download or install a BIOS update while the computer is running on battery power, docked in an optional docking device, or connected to an optional power source. During the download and installation, follow these instructions:
 - Do not disconnect power from the computer by unplugging the power cord from the AC outlet.
 - Do not shut down the computer or initiate Sleep.
 - Do not insert, remove, connect, or disconnect any device, cable, or cord.
- NOTE: If your computer is connected to a network, consult the network administrator before installing any software updates, especially system BIOS updates.

Downloading a BIOS update

After you review the prerequisites, you can check for and download BIOS updates.

1. Select the **Search** icon in the taskbar, type support in the search box, and then select the **HP Support Assistant** app.

- or -

Select the question mark icon in the taskbar.

- 2. Select **Updates**. The **Checking for Updates** window opens, and Windows checks for updates.
- 3. Follow the on-screen instructions.
- 4. At the download area, follow these steps:
 - a. Identify the most recent BIOS update and compare it to the BIOS version currently installed on your computer. If the update is more recent than your BIOS version, make a note of the date, name, or other identifier. You might need this information to locate the update later, after it has been downloaded to your hard drive.
 - **b.** Follow the on-screen instructions to download your selection to the hard drive.

Make a note of the path to the location on your hard drive where the BIOS update is downloaded. You will need to access this path when you are ready to install the update.

Installing a BIOS update

BIOS installation procedures vary. Follow any instructions that appear on the screen after the download is complete. If no instructions appear, follow these steps.

- Select the Search icon in the taskbar, type file in the search box, and then select File Explorer.
- 2. Select your hard drive designation. The hard drive designation is typically Local Disk (C:).
- 3. Using the hard drive path you recorded earlier, open the folder that contains the update.

- Double-click the file that has an .exe extension (for example, *filename*.exe). The BIOS installation begins.
- **5**. Complete the installation by following the on-screen instructions.
- NOTE: After a message on the screen reports a successful installation, you can delete the downloaded file from your hard drive.

7 Backing up, restoring, and recovering

You can use Windows tools or HP software to back up your information, create a restore point, reset your computer, create recovery media, or restore your computer to its factory state. Performing these standard procedures can return your computer to a working state faster.

IMPORTANT: If you will be performing recovery procedures on a tablet, the tablet battery must be at least 70% charged before you start the recovery process.

IMPORTANT: For a tablet with a detachable keyboard, connect the tablet to the keyboard base before beginning any recovery process.

Backing up information and creating recovery media

These methods of creating recovery media and backups are available on select products only.

Using Windows tools for backing up

HP recommends that you back up your information immediately after initial setup. You can do this task either using Windows Backup locally with an external USB drive or using online tools.

- IMPORTANT: Windows is the only option that allows you to back up your personal information. Schedule regular backups to avoid information loss.
- NOTE: If computer storage is 32 GB or less, Microsoft® System Restore is disabled by default.

Using the HP Cloud Recovery Download Tool to create recovery media (select products only)

You can use the HP Cloud Recovery Download Tool to create HP Recovery media on a bootable USB flash drive.

For details:

- ▲ Go to http://www.hp.com/support, search for HP Cloud Recovery, and then select the result that matches the type of computer that you have.
- NOTE: If you cannot create recovery media yourself, contact support to obtain recovery discs. Go to http://www.hp.com/support, select your country or region, and then follow the on-screen instructions.
- **IMPORTANT:** HP recommends that you follow the <u>Restoring and recovery methods on page 65</u> to restore your computer before you obtain and use the HP recovery discs. Using a recent backup can return your machine to a working state sooner than using the HP recovery discs. After the system is restored, reinstalling all the operating system software released since your initial purchase can be a lengthy process.

Restoring and recovering your system

You have several tools available to recover your system both within and outside of Windows if the desktop cannot load.

HP recommends that you attempt to restore your system using the <u>Restoring and recovery methods</u> on page 65.

Creating a system restore

System Restore is available in Windows. The System Restore software can automatically or manually create restore points, or snapshots, of the system files and settings on the computer at a particular point.

When you use System Restore, it returns your computer to its state at the time you made the restore point. Your personal files and documents should not be affected.

Restoring and recovery methods

After you run the first method, test to see whether the issue still exists before you proceed to the next method, which might now be unnecessary.

- Run a Microsoft System Restore.
- Run Reset this PC. 2.
 - **NOTE:** The options **Remove everything** and then **Fully clean the drive** can take several hours to complete and leave no information on your computer. It is the safest way to reset your computer before you recycle it.
- Recover using HP Recovery media. For more information, see Recovering using HP Recovery media on page 65.

For more information about the first two methods, see the Get Help app:

Select the **Start** button, select **All apps**, select the **Get Help** app, and then enter the task you want to perform.



NOTE: You must be connected to the internet to access the Get Help app.

Recovering using HP Recovery media

You can use HP Recovery media to recover the original operating system and software programs that were installed at the factory. On select products, it can be created on a bootable USB flash drive using the HP Cloud Recovery Download Tool.

For details, see Using the HP Cloud Recovery Download Tool to create recovery media (select products only) on page 64.



NOTE: If you cannot create recovery media yourself, contact support to obtain recovery discs. Go to http://www.hp.com/support, select your country or region, and then follow the on-screen instructions.

To recover your system:

Insert the HP Recovery media, and then restart the computer.



NOTE: HP recommends that you follow the Restoring and recovery methods on page 65 to restore your computer before you obtain and use the HP recovery discs. Using a recent backup can return your machine to a working state sooner than using the HP recovery discs. After the system is restored, reinstalling all the operating system software released since your initial purchase can be a lengthy process.

Changing the computer boot order

If your computer does not restart using the HP Recovery media, you can change the computer boot order, the order of devices listed in BIOS for startup information. You can select an optical drive or a USB flash drive, depending on the location of your HP Recovery media.

IMPORTANT: For a tablet with a detachable keyboard, connect the tablet to the keyboard base before beginning these steps.

To change the boot order:

- 1. Insert the HP Recovery media.
- 2. Access the system **Startup** menu.
 - For computers or tablets with keyboards attached, turn on or restart the computer or tablet, quickly press esc. and then press f9 for boot options.
 - For tablets without keyboards, turn on or restart the tablet, quickly press and hold the volume up button, and then select f9.

- or -

Turn on or restart the tablet, quickly press and hold the volume down button, and then select f9.

3. Select the optical drive or USB flash drive from which you want to boot, and then follow the on-screen instructions.

Using HP Sure Recover (select products only)

Select computer models are configured with HP Sure Recover, a PC operating system (OS) recovery solution built into the hardware and software. HP Sure Recover can fully restore the HP OS image without installed recovery software.

Using HP Sure Recover, an administrator or user can restore the system and install:

- Latest version of the operating system
- Platform-specific device drivers
- Software applications, in the case of a custom image

To access the latest documentation for HP Sure Recover, go to http://www.hp.com/support. Follow the onscreen instructions to find your product and locate your documentation.

8 Using HP PC Hardware Diagnostics

You can use the HP PC Hardware Diagnostics utility to determine whether your computer hardware is running properly. The three versions are HP PC Hardware Diagnostics Windows, HP PC Hardware Diagnostics UEFI (Unified Extensible Firmware Interface), and (for select products only) Remote HP PC Hardware Diagnostics UEFI, a firmware feature.

Using HP PC Hardware Diagnostics Windows (select products only)

HP PC Hardware Diagnostics Windows is a Windows-based utility that allows you to run diagnostic tests to determine whether the computer hardware is functioning properly. The tool runs within the Windows operating system to diagnose hardware failures.

If HP PC Hardware Diagnostics Windows is not installed on your computer, first you must download and install it. To download HP PC Hardware Diagnostics Windows, see Downloading HP PC Hardware Diagnostics Windows on page 68.

Using an HP PC Hardware Diagnostics Windows hardware failure ID code

When HP PC Hardware Diagnostics Windows detects a failure that requires hardware replacement, a 24-digit failure ID code is generated for select component tests. For interactive tests, such as keyboard, mouse, or audio and video palette, you must perform troubleshooting steps before you can receive a failure ID.

- You have several options after you receive a failure ID:
 - Select Next to open the Event Automation Service (EAS) page, where you can log the case.
 - or –
 - Scan the QR code with your mobile device, which takes you to the EAS page, where you can log the case.
 - or -
 - Select the box next to the 24-digit failure ID to copy your failure code and send it to support.

Accessing HP PC Hardware Diagnostics Windows

After HP PC Hardware Diagnostics Windows is installed, you can access it from HP Support Assistant or the Start menu.

Accessing HP PC Hardware Diagnostics Windows from HP Support Assistant

After HP PC Hardware Diagnostics Windows is installed, follow these steps to access it from HP Support Assistant.

Select the Search icon in the taskbar, type support in the search box, and then select the HP Support
 Assistant app.

– or –

Select the guestion mark icon in the taskbar.

- 2. Select Fixes & Diagnostics.
- 3. Select **Run hardware diagnostics**, and then select **Launch**.
- 4. When the tool opens, select the type of diagnostic test that you want to run, and then follow the onscreen instructions.
- NOTE: To stop a diagnostic test, select **Cancel**.

Accessing HP PC Hardware Diagnostics Windows from the Start menu (select products only)

After HP PC Hardware Diagnostics Windows is installed, follow these steps to access it from the Start menu.

- 1. Select the Start button.
- 2. Right-click HP PC Hardware Diagnostics for Windows, and then select Run as administrator.
- When the tool opens, select the type of diagnostic test that you want to run, and then follow the onscreen instructions.
- **NOTE:** To stop a diagnostic test, select **Cancel**.

Downloading HP PC Hardware Diagnostics Windows

The HP PC Hardware Diagnostics Windows downloading instructions are provided in English only. You must use a Windows computer to download this tool because only .exe files are provided.

Downloading the latest HP PC Hardware Diagnostics Windows version from HP

To download HP PC Hardware Diagnostics Windows from HP, follow these steps.

- 1. Go to http://www.hp.com/go/techcenter/pcdiags. The HP PC Diagnostics home page is displayed.
- Select **Download HP Diagnostics Windows**, and then select the specific Windows diagnostics version to download to your computer or a USB flash drive.

The tool downloads to the selected location.

Downloading the HP PC Hardware Diagnostics Windows from the Microsoft Store

You can download the HP PC Hardware Diagnostics Windows from the Microsoft Store.

- 1. Select the Microsoft Store app on your desktop or select the **Search** icon in the taskbar, and then type Microsoft Store in the search box.
- 2. Enter HP PC Hardware Diagnostics Windows in the Microsoft Store search box.
- 3. Follow the on-screen directions.

The tool downloads to the selected location.

Downloading HP Hardware Diagnostics Windows by product name or number (select products only)

You can download HP PC Hardware Diagnostics Windows by product name or number.

NOTE: For some products, you might have to download the software to a USB flash drive by using the product name or number.

- 1. Go to http://www.hp.com/support.
- Select Software and Drivers, select your type of product, and then enter the product name or number in the search box that is displayed.
- 3. In the **Diagnostics** section, select **Download**, and then follow the on-screen instructions to select the specific Windows diagnostics version to be downloaded to your computer or USB flash drive.

The tool downloads to the selected location.

Installing HP PC Hardware Diagnostics Windows

To install HP PC Hardware Diagnostics Windows, navigate to the folder on your computer or the USB flash drive where the .exe file downloaded, double-click the .exe file, and then follow the on-screen instructions.

Using HP PC Hardware Diagnostics UEFI

HP PC Hardware Diagnostics UEFI (Unified Extensible Firmware Interface) allows you to run diagnostic tests to determine whether the computer hardware is functioning properly. The tool runs outside the operating system so that it can isolate hardware failures from issues that are caused by the operating system or other software components.

NOTE: For some products, you must use a Windows computer and a USB flash drive to download and create the HP UEFI support environment because only .exe files are provided. For more information, see Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive on page 70.

If your PC does not start in Windows, you can use HP PC Hardware Diagnostics UEFI to diagnose hardware issues.

Using an HP PC Hardware Diagnostics UEFI hardware failure ID code

When HP PC Hardware Diagnostics UEFI detects a failure that requires hardware replacement, a 24-digit failure ID code is generated.

For assistance in solving the problem:

Select Contact HP, accept the HP privacy disclaimer, and then use a mobile device to scan the failure ID code that appears on the next screen. The HP Customer Support - Service Center page appears with your failure ID and product number automatically filled in. Follow the on-screen instructions.

– or –

Contact support, and provide the failure ID code.

- NOTE: To start diagnostics on a convertible computer, your computer must be in notebook mode, and you must use the attached keyboard.
- **NOTE:** If you need to stop a diagnostic test, press esc.

Starting HP PC Hardware Diagnostics UEFI

To start HP PC Hardware Diagnostics UEFI, follow this procedure.

- 1. Turn on or restart the computer, and quickly press esc.
- Press f2.

The BIOS searches three places for the diagnostic tools, in the following order:

- a. Connected USB flash drive
- NOTE: To download the HP PC Hardware Diagnostics UEFI tool to a USB flash drive, see Downloading the latest HP PC Hardware Diagnostics UEFI version on page 70.
- **b.** Hard drive
- c. BIOS
- 3. When the diagnostic tool opens, select the type of diagnostic test that you want to run, and then follow the on-screen instructions.

Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive

Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive can be useful in some situations.

- HP PC Hardware Diagnostics UEFI is not included in the preinstallation image.
- HP PC Hardware Diagnostics UEFI is not included in the HP Tool partition.
- The hard drive is damaged.

NOTE: The HP PC Hardware Diagnostics UEFI downloading instructions are provided in English only, and you must use a Windows computer to download and create the HP UEFI support environment because only .exe files are provided.

Downloading the latest HP PC Hardware Diagnostics UEFI version

To download the latest HP PC Hardware Diagnostics UEFI version to a USB flash drive, follow this procedure.

- Go to http://www.hp.com/go/techcenter/pcdiags. The HP PC Diagnostics home page is displayed.
- 2. Select **Download HP Diagnostics UEFI**, and then select **Run**.

Downloading HP PC Hardware Diagnostics UEFI by product name or number (select products only)

You can download HP PC Hardware Diagnostics UEFI by product name or number (select products only) to a USB flash drive.

- NOTE: For some products, you might have to download the software to a USB flash drive by using the product name or number.
 - 1. Go to http://www.hp.com/support.
 - 2. Enter the product name or number, select your computer, and then select your operating system.
 - In the Diagnostics section, follow the on-screen instructions to select and download the specific UEFI Diagnostics version for your computer.

Using Remote HP PC Hardware Diagnostics UEFI settings (select products only)

Remote HP PC Hardware Diagnostics UEFI is a firmware (BIOS) feature that downloads HP PC Hardware Diagnostics UEFI to your computer. It can then execute the diagnostics on your computer, and it might upload results to a preconfigured server.

For more information about Remote HP PC Hardware Diagnostics UEFI, go to http://www.hp.com/go/techcenter/pcdiags, and then select **Find out more**.

Downloading Remote HP PC Hardware Diagnostics UEFI

HP Remote PC Hardware Diagnostics UEFI is also available as a SoftPag that you can download to a server.

Downloading the latest Remote HP PC Hardware Diagnostics UEFI version

You can download the latest HP PC Hardware Diagnostics UEFI version to a USB flash drive.

- Go to http://www.hp.com/go/techcenter/pcdiags. The HP PC Diagnostics home page is displayed.
- Select **Download Remote Diagnostics**, and then select **Run**.

Downloading Remote HP PC Hardware Diagnostics UEFI by product name or number

You can download HP Remote PC Hardware Diagnostics UEFI by product name or number.

- **NOTE:** For some products, you might have to download the software by using the product name or number.
 - Go to http://www.hp.com/support.
 - Select **Software and Drivers**, select your type of product, enter the product name or number in the search box that is displayed, select your computer, and then select your operating system.
 - In the Diagnostics section, follow the on-screen instructions to select and download the Remote UEFI version for the product.

Customizing Remote HP PC Hardware Diagnostics UEFI settings

Using the Remote HP PC Hardware Diagnostics setting in Computer Setup (BIOS), you can perform several customizations.

- Set a schedule for running diagnostics unattended. You can also start diagnostics immediately in interactive mode by selecting **Execute Remote HP PC Hardware Diagnostics**.
- Set the location for downloading the diagnostic tools. This feature provides access to the tools from the HP website or from a server that has been preconfigured for use. Your computer does not require the traditional local storage (such as a hard drive or USB flash drive) to run remote diagnostics.
- Set a location for storing the test results. You can also set the user name and password that you use for uploads.
- Display status information about the diagnostics run previously.

To customize Remote HP PC Hardware Diagnostics UEFI settings, follow these steps:

- Turn on or restart the computer, and when the HP logo appears, press f10 to enter Computer Setup. 1.
- Select **Advanced**, and then select **Settings**. 2.
- 3. Make your customization selections.
- Select Exit, then select Save Changes and Exit to save your settings.

Your changes take effect when the computer restarts.

Specifications

This chapter provides specifications for your computer.

Computer specifications

This section provides specifications for your computer. When traveling with your computer, the computer dimensions and weights, as well as input power ratings and operating specifications, provide helpful information.

Table 9-1 Computer specifications

	Metric	U.S.
Dimensions		
Width	360.2 mm	14.18 in
Depth	234 mm	9.21 in
Height (front to back)	17.9 mm	0.71 in
Neight	1750 g	3.86 lb
nput power		
Operating voltage and current	19.5 V dc @ 3.33 A – 65 W	
	19.5 V dc @ 2.31 A – 45 W	
Temperature		
Operating	5°C to 35°C	41°F to 95°F
Nonoperating	-20°C to 60°C	−4°F to 140°F
Relative humidity (noncondensing)		
Operating	10% to 90%	
Nonoperating	5% to 95%	
Maximum altitude (unpressurized)		
Operating	−15 m to 3,048 m	−50 ft to 10,000 ft
Nonoperating	–15 m to 12,192 m	−50 ft to 40,000 ft

39.6 cm (15.6 in) display specifications

This section provides specifications for your display.

Table 9-2 Display specifications

	Metric	U.S.
Active diagonal size	39.6 cm	15.6 in
Resolution	1366 × 768 (HD)	
	1920 × 1080 (FHD)	
Surface treatment	Antiglare (FHD panels)	
	BrightView (HD, FHD panel)	
Brightness	220 nits	
	250 nits	
	300 nits	
Viewing angle	SVA	
	UWVA	
Backlight	WLED	
Display panel interface	eDP	

Solid-state drive specifications

This section provides specifications for your solid-state drives.

Table 9-3 Solid-state drive specifications

	256 GB*	512 GB*	1 TB*
Dimensions			
Height	1.0 mm	1.0 mm	1.0 mm
Length	50.8 mm	50.8 mm	50.8 mm
Width	28.9 mm	28.9 mm	28.9 mm
Weight	< 10 g	< 10 g	< 10 g
Interface type	PCIe	PCIe	PCIe
Ready time, maximum (to not busy)	1.0 ms	< 1.0 ms	1.0 ms
Access times, logical	0.1 ms	0.1 ms	0.1 ms
Transfer rate			
Sequential read	up to 2150 MB/s	up to 2150 MB/s	up to 2150 MB/s
Random read	Up to 300,000 IOPs	Up to 300,000 IOPs	Up to 300,000 IOPs
Sequential write	up to 1550 MB/s	up to 1550 MB/s	up to 1550 MB/s
Random write	Up to 100,000 IOPs	Up to 100,000 IOPs	Up to 100,000 IOPs
Total logical sectors	468,883,296	1,000,215,216	1,500,336,388
Operating temperature	0°C to 70°C (32°F to 1	0°C to 70°C (32°F to 158°F)	

Table 9-3 Solid-state drive specifications (continued)

256 GB*	512 GB*	1 TB*

^{*1} GB = 1 billion bytes when referring to hard drive storage capacity. Actual accessible capacity is less. Actual drive specifications might differ slightly.

NOTE: Certain restrictions and exclusions apply. Contact support for details.

Solid-state drive specifications (SATA-3)

This section provides specifications for your solid-state drive.

Table 9-4 Solid-state drive specifications

	128 GB*
Dimensions	
Height	1.35 mm
Weight	< 10 g
Interface type	SATA-3
Ready time, maximum (to not busy)	1.0 ms
Access times, logical	0.1 ms
Transfer rate	up to 540 MB/s
Total logical sectors	234,441,648
Operating temperature	0°C to 70°C (32°F to 158°F)

^{*1} GB = 1 billion bytes when referring to hard drive storage capacity. Actual accessible capacity is less. Actual drive specifications can differ slightly.

NOTE: Certain restrictions and exclusions apply. Contact support for details.

10 Power cord set requirements

This chapter provides power cord requirements for countries and regions.

The wide-range input feature of the computer permits it to operate from any line voltage from 100 V ac to 120 V ac, or from 220 V ac to 240 V ac.

The three-conductor power cord set included with the computer meets the requirements for use in the country or region where the equipment is purchased.

Power cord sets for use in other countries or regions must meet the requirements of the country and region where the computer is used.

Requirements for all countries

These power cord requirements are applicable to all countries and regions.

- The length of the power cord set must be at least 1.0 m (3.3 ft) and no more than 2.0 m (6.5 ft).
- All power cord sets must be approved by an acceptable accredited agency responsible for evaluation in the country or region where the power cord set will be used.
- The power cord sets must have a minimum current capacity of 10 A and a nominal voltage rating of 125 V ac or 250 V ac, as required by the power system of each country or region.
- The appliance coupler must meet the mechanical configuration of an EN 60 320/IEC 320 Standard Sheet
 C13 connector for mating with the appliance inlet on the back of the computer.

Requirements for specific countries and regions

To determine power cord requirements for specific countries and regions, use this table.

Table 10-1 Power cord requirements for specific countries and regions

Country/region	Accredited agency	Applicable note number
Argentina	IRAM	1
Australia	SAA	1
Austria	OVE	1
Belgium	CEBEC	1
Brazil	ABNT	1
Canada	CSA	2
Chile	IMQ	1
Denmark	DEMKO	1
Finland	FIMKO	1
France	UTE	1
Germany	VDE	1

Table 10-1 Power cord requirements for specific countries and regions (continued)

Country/region	Accredited agency	Applicable note number
India	BIS	1
Israel	SII	1
Italy	IMQ	1
Japan	JIS	3
Netherlands	KEMA	1
New Zealand	SANZ	1
Norway	NEMKO	1
People's Republic of China	CCC	4
Saudi Arabia	SASO	7
Singapore	PSB	1
South Africa	SABS	1
South Korea	KTL	5
Sweden	SEMKO	1
Switzerland	SEV	1
Taiwan	BSMI	6
Thailand	TISI	1
United Kingdom	ASTA	1
United States	UL	2

- The flexible cord must be Type HO5VV-F, three-conductor, 0.75 mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
- The flexible cord must be Type SVT/SJT or equivalent, No. 18 AWG, three-conductor. The wall plug must be a two-pole grounding type with a NEMA 5-15P (15 A, 125 V ac) or NEMA 6-15P (15 A, 250 V ac) configuration. CSA or C-UL mark. UL file number must be on each element.
- 3. The appliance coupler, flexible cord, and wall plug must bear a T mark and registration number in accordance with the Japanese Dentori Law. The flexible cord must be Type VCTF, three-conductor, 0.75 mm² or 1.25 mm² conductor size. The wall plug must be a two-pole grounding type with a Japanese Industrial Standard C8303 (7 A, 125 V ac) configuration.
- 4. The flexible cord must be Type RVV, three-conductor, 0.75 mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the CCC certification mark.
- 5. The flexible cord must be Type H05VV-F three-conductor, 0.75 mm² conductor size. KTL logo and individual approval number must be on each element. Approval number and logo must be printed on a flag label.
- The flexible cord must be Type HVCTF three-conductor, 1.25 mm² conductor size. Power cord set fittings (appliance coupler, cable, and wall plug) must bear the BSMI certification mark.
- 7. For 127 V ac, the flexible cord must be Type SVT or SJT 3-conductor, 18 AWG, with plug NEMA 5-15P (15 A, 125 V ac), with UL and CSA or C-UL marks. For 240 V ac, the flexible cord must be Type H05VV-F three-conductor, 0.75 mm² or 1.00 mm² conductor size, with plug BS 1363/A with BSI or ASTA marks.

11 Recycling

When a nonrechargeable or rechargeable battery has reached the end of its useful life, do not dispose of the battery in general household waste. Follow the local laws and regulations in your area for battery disposal.

HP encourages customers to recycle used electronic hardware, HP original print cartridges, and rechargeable batteries. For more information about recycling programs, see the HP website at http://www.hp.com/recycle.

Index

A	components	guidelines
AC adapter and battery light,	bottom 13	packaging 24, 30
identifying 5	display 7	transporting 24, 30
AC adapters, spare part numbers 22	keyboard area 8	workstation 24
action key, identifying 12	left side 5	
	lights 9	H
В	right side 5	hard drive
backup, creating 64	touchpad 8, 9	specifications 72
backups 64	computer major components 16	HDMI port
battery	computer specifications 72	identifying 6
illustrated 16	connectors	heat sink
spare part number 16	power 6	illustrated 16
BIOS	control zone 8	removal 44
determining version 61		spare part number 16
downloading an update 62	D	spare part numbers 44
starting the Setup Utility 61	display	hinge
updating 61	specifications 72	illustrated 20
Bluetooth label 14	display assembly	spare part number 20
boot order, changing 65	subcomponents 19	HP PC Hardware Diagnostics UEFI
bottom components 13	display cable	downloading 70
bottom cover	illustrated 21	failure ID code 69
illustrated 16	spare part number 21	starting 69
removal 32	display components 7	using 69
spare part number 16, 32	display/camera cable	HP PC Hardware Diagnostics Windows
buttons	spare part number 21	accessing 67, 68
left touchpad 8		downloading 68
power 11,12	E	failure ID code 67
right touchpad 8	electrostatic discharge (ESD) 24, 25	installing 69
g coacpaa	preventing damage 24, 25, 26	using 67
C	esc key, identifying 12	HP Recovery media
cables	<i>y, y y</i>	recovery 65
spare part numbers 21	F	HP Sure Recover 66
camera	fan	
identifying 8	illustrated 16	1
camera light, identifying 8	removal 42	illustrated parts catalog 16
caps lock light 10	spare part number 16, 42	integrated numeric keypad,
caring for your computer 28	fingerprint reader 12	identifying 13
cautions	removal 41	internal microphones, identifying 8
electrostatic discharge 24, 25	spare part numbers 41	international optiones, racinarying
cleaning your computer 28	fingerprint reader cable	K
caring for wood veneer 30	spare part number 21	keyboard
disinfecting 29	fn key, identifying 12	product description 3
HP Easy Clean 28	-3, 3 3 - -	keyboard with top cover
removing dirt and debris 28	G	spare part numbers 58
	grounding methods 24, 25, 26	keypad, integrated numeric 13

keys	removal 50	solid-state drive
action 12	spare part number 16	illustrated 16
esc 12	spare part numbers 50	removal and replacement 37
fn 12	power connector cable cable	spare part number 16
num lock 13	spare part number 21	specifications 73,74
Windows 12	power cord	spare part country codes 58
	requirements for all countries	speaker
L	75	illustrated 16
labels	requirements for specific	removal 40
Bluetooth 14	countries and regions 75	spare part number 16
regulatory 14	set requirements 75	spare part numbers 40
serial number 14	power cords, spare part numbers	special keys
service 14	22	identifying 12
wireless certification 14	power light, identifying 10	using 12
WLAN 14	product description	specifications
left control zone, identifying 8, 9	keyboard 3	computer 72
left side components 5	pointing device 3	display 72
lights	ports 2	hard drive 72
AC adapter and battery 5	product name and number,	solid-state drive 73, 74
camera 8	computer 14	static electricity 24, 25
caps lock 10		support information 30
mute 10	R	system board
power 10	recovery 64	illustrated 16
touchpad 8	discs 65	removal 46
low blue light mode 7	media 65	spare part number 16
	USB flash drive 65	spare part numbers 46
M	recovery media 64	system restore 65
memory modules	creating using HP Cloud Recovery	system restore point, creating 64
removal 38	Download Tool 64	3, 11
spare part numbers 38	creating using Windows tools 64	Т
mute light, identifying 10	regulatory information	top cover/keyboard
	regulatory label 14	illustrated 16
N	wireless certification labels 14	spare part number 16
num lock key, identifying 13	Remote HP PC Hardware Diagnostics	touchpad
	UEFI settings	illustrated 16
P	customizing 71	removal 48
packaging guidelines 24, 30	using 70	settings 8
pointing device, product	removal and replacement	spare part number 16
description 3	procedures 32	spare part numbers 48
ports	solid-state drive 37	touchpad buttons
HDMI 6	restoring 64	identifying 8
product description 2	restoring and recovery methods 65	touchpad cable
USB SuperSpeed 5, 6	right control zone, identifying 8, 9	spare part number 21
USB Type-C power connector and	right side components 5	touchpad components 8
SuperSpeed 10 Gbps port with	F	touchpad light, identifying 8
DisplayPort output 6	S	touchpad settings, adjusting 8
power button, identifying 11, 12	Screw Kit, spare part number 22	touchpad zone, identifying 8, 9
power connector	serial number, computer 14	transporting guidelines 24, 30
identifying 6	service labels, locating 14	traveling with the computer 14
power connector cable	, 	a areang man the computer 14
illustrated 16		

U	
USB board	
illustrated 16	
removal 39	
spare part number 16	
spare part numbers 39	
USB board cable	
spare part number 21	
USB SuperSpeed 5 Gbps port,	
identifying 5, 6	
USB Type-C power connector and	
SuperSpeed 10 Gbps port with	
DisplayPort output, identifying	6

W

Windows
backup 64
recovery media 64
system restore point 64
Windows key, identifying 12
Windows tools, using 64
wireless antennas, identifying 8
wireless certification label 14
WLAN antennas, identifying 8
WLAN device 14
WLAN label 14
WLAN module
removal 35
spare part numbers 35
workstation guidelines 24