

# Presario 2400

<b>System/Processor Boards</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>System</b>
System Board, Proc, w/ 32MB, w/ 2MB Video	310198-001	319208-001	2410ES
Processor Board, w/o Processor		337362-001	2412ES, 2415ES, 2416ES

## Jumper Settings, Presario 2410ES

<b>CPU Clock Multiplier</b>	<b>JP1</b>	<b>JP2</b>	<b>JP2</b>	<b>JP3</b>	<b>JP4</b>
233	OPEN	2-3	1-2	5-6 (3.2V)	OPEN
266	1-2, 5-6	2-3	1-2	OPEN (3.2V)	3-4

<b>Configuration Codes</b>	<b>System Board or Processor Board Spare Part</b>	<b>Model</b>
BXT3	337362-001	2416ES
BXT4	337362-001	2415ES
CDQ4	337362-001	2412ES

<b>Microprocessors</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>System</b>
266 MHz	296576-005	319236-001	2410ES
300 MHz (K62)	320471-002	337374-001	2415ES
300/75 (MX-2)	319349-002	386217-001	2412ES
333/100 MHz (K6-2)	320471-003	337364-001	2416ES

<b>Memory</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>System</b>
16 MB, 16ns, SDRAM	278030-003	278066-001	2410ES
32 MB, 60ns, SDRAM	320766-001	319326-001	2412ES
32 MB, 100 MHz, DIMM	320766-101	319326-001	2415ES
64 MB DIMM	323012-001	179190-001	2416ES
256K Cache	237716-001	243117-001	2410ES
Memory Module, Video, 1MB	210257-004	327265-001	2410ES

<b>Miscellaneous</b>	<b>Assembly</b>	<b>Spare Part</b>	<b>System</b>
Bezel Button Board w/ Cable		319206-001	2410ES
Bezel		319207-001	2410ES
Bezel, ES		319279-001	2410ES
Bezel		337358-001	2412ES, 2415ES, 2416ES
Button/Headphone Board w/ Cable		337357-001	2412ES, 2415ES, 2416ES
Backplane Board, w/o NIC, w/o ISA		386216-001	2415ES 2416ES
Backplane Board, w/ NIC, w/o ISA		337360-001	2412ES
Hard Drive Mounting Bracket		243231-001	2410ES
Headphone Board		298469-001	2410ES
Keyboard, US English	286220-003	304286-003	2410ES, 2412ES, 2415ES, 2416ES

Continued

# Presario 2400

Miscellaneous	Assembly	Spare Part	System
Mouse, KYE Shielded	149998-006	199181-401	2410ES,
Mouse, Ivory	141649-008	337416-001	2412ES, 2415ES, 2416ES
Speaker, Left		298479-001	2410ES
Speaker, Left or Right		337377-001	2412ES, 2415ES, 2416ES
Speaker, Right w/ Enclosure		298480-001	2410ES
Misc Hardware/Plastic Kit		337368-001	2412ES, 2415ES, 2416ES
Misc Hardware Kit		298592-001	2410ES

Controller Boards	Assembly	Spare Part	System
PCI, 10/100 NIC TX	317607-001	317606-001	2410ES, 2412ES, 2416ES

Hard Drives	Spare Part	System
4.0 GB, IDE	286248-001	2410ES
4.0 GB, IDE	337379-001	2412ES, 2415ES
6.0 GB, IDE	166973-001	2416ES
8.0 GB, IDE	309087-001	2416ES

CD-ROM Drive	Spare Part	System
CD-ROM, IDE, 32x	317212-001	2410ES, 2412ES, 2415ES, 2416ES

Diskette Drives	Spare Part	System
1.44 MB	239612-401	2410ES, 2412ES, 2415ES, 2416ES


Cables	Assembly	Spare Part	System
Cable Kit, Miscellaneous		170720-001	2410ES
Cable Kit, Miscellaneous		337361-001	2412ES, 2415ES, 2416ES
Cable Kit, Modem w/ Adapter, Aus, NZ	112666-005	304398-011	2415

Power Supply/Battery	Spare Part	System
Power Supply, 75W, w/ Baffle	319234-001	2410ES
Power Supply, 75W	337373-001	2412ES, 2415ES, 2416ES
Battery	337356-001	2412ES, 2415ES, 2416ES
Battery	234556-001	2410ES


# Presario 2400

## Presario 2410ES MEMORY UPGRADE CHART

PROCESSOR BOARD  
310198-001  
(32 MB)

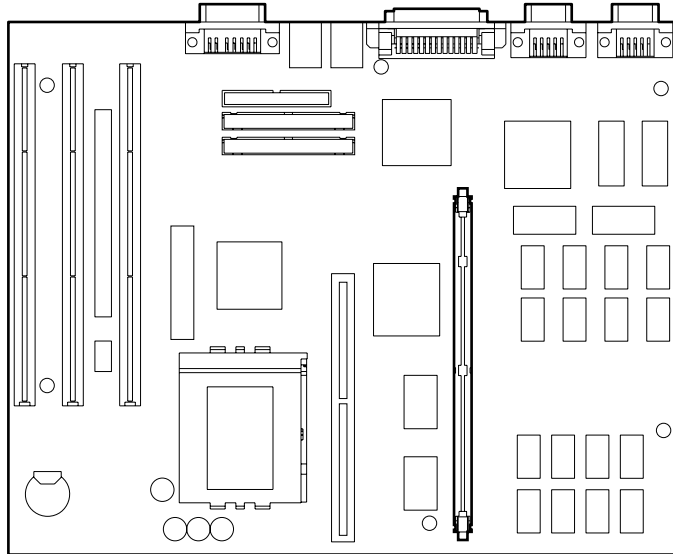

A MAXIMUM OF 48 OR 64 MB TOTAL MEMORY  
32 MB STANDARD MEMORY SOLDERED  
ON SYSTEM BOARD.




MEMORY OPTIONS ARE NOT AVAILABLE FOR THE  
PRESARIO 2250 SERIES, 2510, AND 2410ES


# Presario 2400

## Presario 2412ES, 2415ES, 2416ES MEMORY UPGRADE CHART

### PROCESSOR BOARD

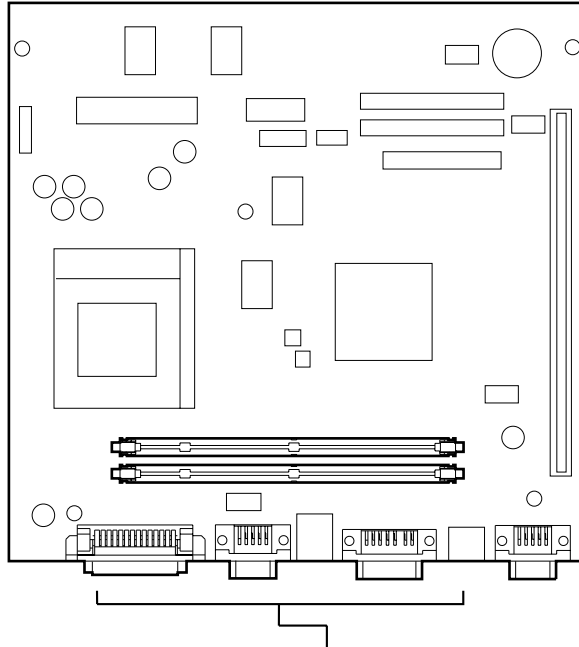

A MAXIMUM OF 256 MB TOTAL MEMORY  
USE 16, 32, OR 64 MB 100 MHz DIMMs



MEMORY OPTIONS ARE NOT AVAILABLE