









## Security features

How do I?	Steps to perform	
<p>Turn on password protection from the control panel</p> <p>The password-protection feature must be turned on before the private-receive feature can be activated.</p>	<ol style="list-style-type: none"> <li data-bbox="716 347 1360 383">1 On the control panel, press <b>Setup</b>.</li> <li data-bbox="716 587 1360 646">2 Use the arrow buttons to select <b>Fax setup</b>, and then press <b>OK</b>.</li> <li data-bbox="716 834 1360 893">3 Use the arrow buttons to select <b>Advanced setup</b>, and then press <b>OK</b>.</li> <li data-bbox="716 1082 1360 1141">4 Use the arrow buttons to select <b>Private receive</b>, and then press <b>OK</b>.</li> </ol>	   





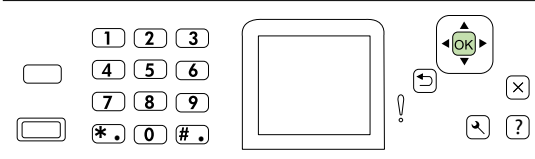How do I?	Steps to perform
<p>Turn on password protection from the control panel (continued)</p>	<p><b>5</b> Use the arrow buttons to select <b>On</b>, and then press <b>OK</b>.</p>  <p><b>6</b> Use the alphanumeric buttons to enter the product security password, and then press <b>OK</b>.</p>  <p><b>7</b> To confirm the product security password, use the alphanumeric buttons to re-enter the product security password, and then press <b>OK</b>.</p> 