

External Devices

User Guide

© Copyright 2006 Hewlett-Packard
Development Company, L.P.

Microsoft and Windows are U.S. registered
trademarks of Microsoft Corporation.

The information contained herein is subject
to change without notice. The only
warranties for HP products and services are
set forth in the express warranty statements
accompanying such products and services.
Nothing herein should be construed as
constituting an additional warranty. HP shall
not be liable for technical or editorial errors
or omissions contained herein.

First Edition: March 2006

Document Part Number: 406613-001

Table of contents

1 Using a USB device

Connecting a USB device	2
Stopping a USB device	2
Required USB software	2
USB legacy support	3

2 Using a 1394 device

Connecting a 1394 device	6
Stopping a 1394 device	6
Required 1394 software	6


3 Using the docking connector

Index	9
-------------	---

1 Using a USB device

Universal Serial Bus (USB) is a hardware interface that can be used to connect an optional external device, such as a USB keyboard, mouse, drive, printer, scanner, or hub, to the computer or to an optional docking device. A hub provides additional USB ports for the system and can be connected to the computer or to another hub.

The computer has one standard USB port and one standard powered USB port. A powered USB port provides power to an external device if used with a powered USB cable. An optional docking device provides additional USB ports that can be used with the computer. The USB ports on the computer support USB 1.0, USB 1.1, and USB 2.0 devices.

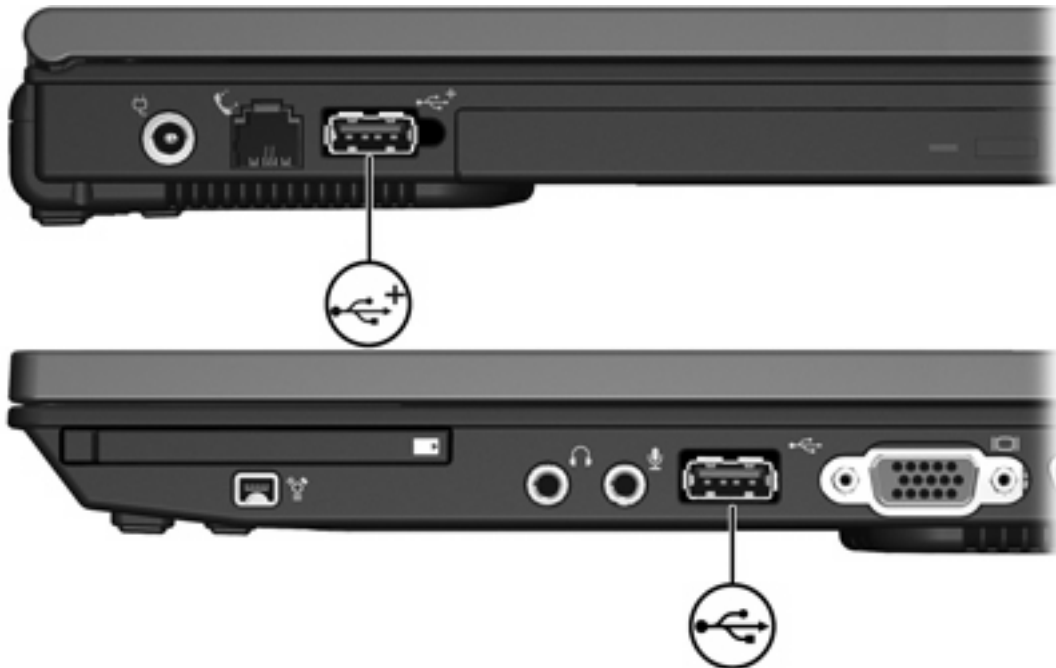

Connecting a USB device



CAUTION To prevent damage to the USB connectors, use minimal force to connect a USB device.

To connect a USB device to the computer, connect the USB cable for the device to the USB port. The operating system will issue a sound to indicate that a device has been detected.



NOTE The first time you connect a USB device, the "Found New Hardware" message is displayed in the notification area, at the far right of the taskbar.

Stopping a USB device



CAUTION To prevent loss of information or an unresponsive system, stop the USB device before removing it.

To stop a USB device:

1. Double-click the **Safely Remove Hardware** icon in the notification area, at the far right of the taskbar.



NOTE To display the Safely Remove Hardware icon, click the **Show Hidden Icons** icon (< or <<) in the notification area.

2. Click the USB device listing.



NOTE If the USB device is not listed, you do not have to stop the device before you remove it.

3. Click **Stop**.

Required USB software

Some USB devices may require additional support software, which is usually included with the device. For more information about device-specific software, refer to the user guide for the device.

USB legacy support

USB legacy support (enabled by default) allows you to

- Use a USB keyboard, mouse, or hub connected to a USB port on the computer during startup or in a non-Microsoft® Windows® application or utility.
- Start or restart from an optional external MultiBay.

To enable or disable USB legacy support:

1. Open Computer Setup by turning on or restarting the computer, and then pressing **f10** while the “F10 = ROM Based Setup” message is displayed in the lower-left corner of the screen.
2. Use the arrow keys to select **System Configuration > Device configurations**.
3. Use the arrow keys to enable or disable USB legacy support.
4. To save your preferences and exit Computer Setup, use the arrow keys to select **File > Save changes and exit**. Then follow the instructions on the screen.

Your preferences go into effect when the computer restarts.

2 Using a 1394 device

IEEE 1394 is a hardware interface that can be used to connect a high-speed multimedia or data storage device to the computer. Scanners, digital cameras, and digital camcorders often require a 1394 connection.

The 1394 port, illustrated below, also supports IEEE 1394a devices.



Connecting a 1394 device



CAUTION To prevent damage to the 1394 port connectors, use minimal force to connect a 1394 device.

To connect a 1394 device to the computer, connect the 1394 cable for the device to the 1394 port. The operating system will issue a sound to indicate that a device has been detected.



NOTE The first time you connect a 1394 device, the "Found New Hardware" message is displayed in the notification area, at the far right of the taskbar.

Stopping a 1394 device



CAUTION To prevent loss of information or an unresponsive system, stop the 1394 device before removing it.

To stop a 1394 device:

1. Double-click the **Safely Remove Hardware** icon in the notification area, at the far right of the taskbar.



NOTE To display the Safely Remove Hardware icon, click the **Show Hidden Icons** icon (< or <<) in the notification area.


2. Click the 1394 device listing.
3. Click **Stop**.

Required 1394 software

Some 1394 devices may require additional support software, which is usually included with the device. For more information about device-specific software, refer to the user guide for the device.

3 Using the docking connector

The docking connector on the right side of the computer allows you to connect the computer to an optional docking device. An optional docking device provides additional ports and connectors that can be used with the computer.

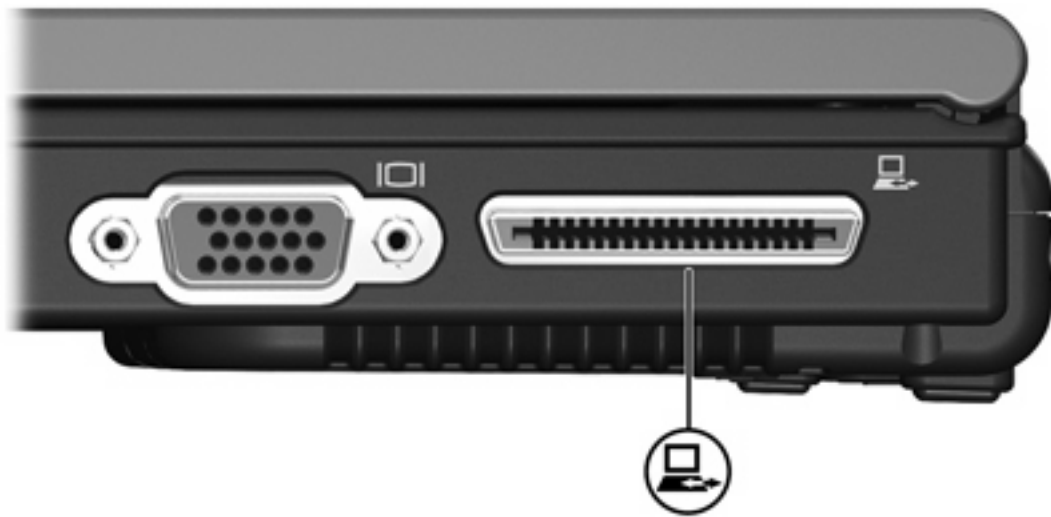

Index

Symbols/Numerics

- 1394 cable, connecting 6
- 1394 devices
 - connecting 6
 - description 5
 - software and drivers 6
 - stopping 6
- 1394 port 5

C

- cables
 - 1394 6
 - USB 2

D

- docking connector 7

H

- hubs 1

P

- ports
 - 1394 5
 - USB 1

S

- software
 - 1394 6
 - USB devices 2

U

- USB cable, connecting 2
- USB devices
 - connecting 2
 - description 1
 - required software 2
 - stopping 2
- USB hubs 1
- USB legacy support 3
- USB ports, identifying 1

- USB software 2

